

RACER Trust

Semi-Annual Progress and Data Report – First Half 2022

**USEPA ID No. IND000806844
Former GM Delco Plant 5
Kokomo, Indiana**

July 15, 2022

Semi-Annual Progress and Data Report – First Half 2022

USEPA ID No. IND000806844

Former GM Delco Plant 5

Kokomo, Indiana

May 17, 2022

Prepared By:

Arcadis U.S., Inc.

150 W. Market Street, Suite 728

Indianapolis

Indiana 46204

Phone: 317 231 6500

Fax: 317 231 6514

Prepared For:

Robert Hare

Cleanup Manager

RACER Trust


1505 Woodward Avenue, Suite 200

PO Box 43859

Detroit, MI 48226


Our Ref:

30123295



Severin Presswood

Staff Geologist



Matthew Griles, LPG

Senior Project Geologist



Sarah Fisher

Senior Scientist

This document is intended only for the use of the individual or entity for which it was prepared and may contain information that is privileged, confidential and exempt from disclosure under applicable law. Any dissemination, distribution or copying of this document is strictly prohibited.

Contents

1	Introduction.....	1
2	Progress Report.....	1
3	Groundwater Gauging.....	1
4	Semi-Annual Groundwater Monitoring.....	2
4.1	Groundwater Sampling	2
4.2	Groundwater Results	2
4.2.1	Drinking Water Screening Criteria.....	3
4.2.2	Groundwater Vapor Intrusion Screening Criteria.....	3
5	Summary and Conclusions	3
6	References	4

Tables

Table 1.	Monitoring Well Groundwater Elevation Data
Table 2.	Groundwater Analytical Data Summary Screened Against Drinking Water Criteria
Table 3.	Off-Site Groundwater Analytical Data Summary Screened Against Groundwater Vapor Intrusion Criteria

Figures

Figure 1.	Potentiometric Surface – S1 Unit (March 1, 2022)
Figure 2.	Potentiometric Surface – S2 Unit (March 1, 2022)
Figure 3A.	Groundwater Volatile Organic Compound Analytical Results Screened with MCLs – S1 Unit
Figure 3B.	Groundwater Volatile Organic Compound Analytical Results Screened with MCLs – S2 Unit
Figure 4.	TCE Groundwater Concentration Contours – S1 Unit (March 23, 2022)
Figure 5A.	Off-Site Groundwater Volatile Organic Compound Analytical Results Screened with Residential Groundwater Vapor Intrusion Criteria
Figure 5B.	Off-Site Groundwater Volatile Organic Compound Analytical Results Screened with Commercial Groundwater Vapor Intrusion Criteria

Appendices

Appendix A.	First Half 2022 Progress Report
Appendix B.	Groundwater Analytical Reports and Data Validation Reports

1 Introduction

Arcadis U.S. Inc. (Arcadis) has prepared this Semi-Annual Progress and Data Report on behalf of the Revitalizing Auto Communities Environmental Response (RACER) Trust. This report summarizes the first half 2022 activities related to groundwater gauging and groundwater sampling activities at the Former GM Delco Plant 5 in Kokomo, Indiana (the site).

2 Progress Report

In accordance with Section VII, Paragraph 26.b of the Administrative Order on Consent (United States Environmental Protection Agency [USEPA] Docket No. RCRA-05-2011-0017), the First Half 2022 Progress Report is included as **Appendix A** and provides a summary of work performed to date, data collected, problems encountered, project schedule, and percent project completed.

3 Groundwater Gauging

On March 1, 2022, Arcadis measured the depth to groundwater at 62 monitoring wells located in the upper two sand and gravel units (S1 Unit and S2 Unit) at the site. The groundwater gauging data presented in **Table 1** were used to calculate groundwater elevations at each of the monitoring wells. The groundwater elevation contours in the S1 Unit are provided as **Figure 1**. The groundwater elevation contours in the S2 Unit are provided as **Figure 2**.

Potentiometric Data for S1 and S2 Units – March 2022		
Sand and Gravel Unit	Potentiometric Surface Elevation (ft amsl)	General Gradient Direction
S1 Unit	812.43 to 817.53	Southeast
S2 Unit	787.01 to 814.56	South

ft amsl = feet above mean sea level

Groundwater in both the S1 Unit and S2 Unit are confined by overlying clay till units. Groundwater flow direction within the S1 Unit is consistent with previously observed groundwater contours and with those used in groundwater modeling previously performed by Arcadis. The groundwater gradient in the S1 Unit is minimal across the site; however, the gradient increases southeast of the site. Groundwater flow direction within the S2 Unit is primarily to the south, which has previously been observed within the S2 Unit at the site. The groundwater gradient in the S2 Unit is flat, with less than one foot difference in head observed between the northwestern and southeastern portions of the site. Arcadis will continue to evaluate the groundwater potentiometric surfaces and monitor flow directions for both the S1 Unit and S2 Unit through future gauging events.

4 Semi-Annual Groundwater Monitoring

4.1 Groundwater Sampling

On March 23, 2022, Arcadis deployed Passive Diffusion Bags (PDBs) in 38 monitoring wells screened in the S1 Unit and 16 monitoring wells screened in the S2 Unit to evaluate groundwater conditions at the site. Prior to deploying the PDBs, depth to groundwater and total depth of the monitoring wells were measured to verify the PDB placement. Each PDB was connected to a dedicated line in the monitoring well to ensure placement in the center of the screen. The PDBs were allowed to equilibrate inside each monitoring well for a minimum of 3-weeks prior to sampling.

Groundwater samples were collected on March 23, 2022. The PDBs were removed from the monitoring wells and groundwater samples were collected via a dedicated straw directly into laboratory-supplied containers. All containers were immediately sealed, labeled, placed in an ice-packed cooler, and transported to Pace Analytical Services, Inc. (Pace), located in Indianapolis, Indiana. The groundwater samples were analyzed for VOCs in accordance with the USEPA SW-846, Method 8260.

4.2 Groundwater Results

VOC analytical results for groundwater samples collected during the reporting period are presented in **Table 2**. The laboratory analytical reports, along with the validation summaries, are provided in **Appendix B**. Analytes that have been detected at concentrations higher than the laboratory reporting limits are presented in **Table 2** and include:

- 1,1,1-trichloroethane
- 1,1-dichloroethane (1,1-DCA)
- 1,1-dichloroethene (1,1-DCE)
- Benzene
- Chloroform
- cis-1,2-dichloroethene (cis-1,2-DCE)
- Toluene
- trans-1,2-dichloroethene (trans-1,2-DCE)
- Trichloroethene (TCE)
- Vinyl chloride

The analytical results in **Table 2** were compared to Drinking Water Screening Criteria (Maximum Contaminant Levels [MCLs] or the Indiana Department of Environmental Management [IDEM] Remediation Closure Guide [RCG] Tap Water Criteria, when MCLs are not established). Analytes that were detected at concentrations higher than the Drinking Water Screening Criteria during the first half 2022 event include:

- 1,1-DCA
- 1,1-DCE
- cis-1,2-DCE
- trans-1,2-DCE
- TCE
- Vinyl chloride

Groundwater analytical results from the off-site S1 Unit were also compared to the site-specific Residential and Commercial/Industrial Groundwater Vapor Intrusion Screening Criteria (**Table 3**). TCE was the only analyte that was detected at concentrations higher than the site-specific Residential or Commercial/Industrial Groundwater Vapor Intrusion Screening Criteria.

4.2.1 Drinking Water Screening Criteria

Based on the groundwater data collected during the first half 2022; 1,1-DCA, 1,1-DCE, cis-1,2-DCE, trans-1,2-DCE, TCE, and vinyl chloride were detected at concentrations higher than their respective Drinking Water Screening Criteria. Twenty-two monitoring wells in the S1 unit and seven monitoring wells in the S2 unit contained at least one concentration higher than Drinking Water Screening Criteria. As of 2016, the properties in the vicinity of these monitoring wells were connected to municipal water as evidenced by billing records. Additionally, a restriction of on-site potable water wells was proposed in the 2019 Corrective Measures Proposal submitted to USEPA (Arcadis 2019) and the Statement of Basis issued by the USEPA on February 1, 2021 (USEPA 2021). Therefore, there are no completed pathways for drinking groundwater in the vicinity of the site. Analytical results for constituents that have been detected within the past four sampling events are screened against the Drinking Water Screening Criteria are presented on **Figure 3A** and **Figure 3B**. Since TCE is the primary constituent of concern at the site, **Figure 4** presents groundwater isoconcentration contours for TCE in the S1 Unit. The TCE concentrations in groundwater are delineated with the existing monitoring well network.

4.2.2 Groundwater Vapor Intrusion Screening Criteria

Off-site groundwater analytical results from the S1 Unit were also compared to site-specific Groundwater Vapor Intrusion Screening Criteria, as presented in **Table 3** and shown on **Figure 5A** and **Figure 5B**. These criteria have been established for two off site conditions: residential and commercial/industrial property uses. The screening criteria were calculated following an approach described in the IDEM 2012 RCG and detailed in the Risk Assessment Addendum to CMP Amendment (Arcadis 2014). Three monitoring wells have historically exceeded the site-specific Groundwater Vapor Intrusion Screening Criteria: MW-0606-S1, 0612-S1, and MW-0704-S1. The TCE concentration observed at monitoring well MW-0606-S1 (2510 µg/L) exceeded the site-specific Groundwater Vapor Intrusion Screening Criteria for both Off-site Residential (1540 µg/L) and Off-site Commercial/Industrial (2150 µg/L) property uses. The TCE concentrations in monitoring MW-0606-S1 have fluctuated around the site-specific Groundwater Vapor Intrusion Screening Criteria over the past several years. The TCE concentration observed at monitoring well MW-0612-S1 (3070 µg/L) exceeded the site-specific Groundwater Vapor Intrusion Screening Criteria for both Off-site Residential and Off-site Commercial/Industrial property uses. The TCE concentrations detected in monitoring well MW-0612-S1 have been relatively stable throughout the monitoring program. The TCE concentration observed at monitoring well MW-0704-S1 (2250 µg/L) exceeded the site-specific Groundwater Vapor Intrusion Screening Criteria for both Off-site Residential and Off-site Commercial/Industrial property uses. The TCE concentrations in monitoring MW-0704-S1 have fluctuated around the site-specific Groundwater Vapor Intrusion Screening Criteria over the past several years. No other constituents were detected at concentrations greater than or equal to the Groundwater Vapor Intrusion Screening Criteria. Vapor intrusion evaluation in the off-site neighborhood is being managed by USEPA.

5 Summary and Conclusions

During the first half 2022 groundwater sampling event, concentrations of site-specific constituents of concern were higher than the Drinking Water Screening Criteria in 22 of the 38 monitoring wells sampled in the S1 Unit and 7 of the 16 monitoring wells sampled in the S2 Unit. However, groundwater is not currently known to be used for potable purposes at or in the vicinity of the site; therefore, there are no known exposures of the groundwater.

The TCE concentration detected in groundwater from monitoring wells MW-0606-S1, MW-0612-S1, and MW-0704-S1 (2510, 3070, and 2250 µg/L), located immediately east of the site, exceeded the site-specific Groundwater Vapor Intrusion Screening Criteria for Residential property use and the site-specific Groundwater Vapor Intrusion Screening Criteria for Commercial/ Industrial property use. Vapor intrusion evaluation in the off-site neighborhood is being managed by USEPA.

Groundwater concentrations in the S1 Unit are consistent with past monitoring events with the concentrations in several monitoring wells fluctuating by orders of magnitude through time. The groundwater isoconcentration contours for TCE in the S1 Unit has maintained a similar footprint for many years. In general, groundwater concentrations are consistent with past observations, TCE concentrations are delineated in the S1 Unit, and there are no known exposures to groundwater impacts.

RACER Trust plans to implement the final remedy (in-situ soil stabilization and solidification) in 2022 based on the USEPA Final Decision and Response to Comments in June 2021. The semi-annual groundwater sampling results from first half of 2022 will be used to help establish a baseline for potential increases in VOC concentrations observed during implementation of the final remedy.

6 References

- Arcadis U.S., Inc. 2014. Risk Assessment Addendum to CMP Amendment. Former GM Delco Plant 5, Kokomo, Indiana. June 11.
- Arcadis U.S., Inc. 2019. RCRA Corrective Action Corrective Measures Proposal, Former GM Delco Plant 5, Kokomo, IN. September 5.
- IDEM. 2012. Remediation Closure Guide. Office of Land Quality. March 22 with corrections through July 9.
- USEPA. 2011. Administrative Order on Consent (USEPA Docket No. RCRA-05-2011-0017), Remediation and Reuse Branch, Land and Chemicals Division. September 29.
- USEPA. 2021 Final Decision and Response to Comments for RACER Trust Former GM Delco Plant 5, 1723 North Washington Street, Kokomo, Indiana, EPA ID: IND 000 806 844. June 16

Tables

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
DR-1301-S1	3/3/2017	12.15	24.62	827.04	814.89
DR-1301-S1	9/6/2017	12.78	24.82	827.04	814.26
DR-1301-S1	3/6/2018	11.05	24.87	827.04	815.99
DR-1301-S1	9/12/2018	10.92	23.90	827.04	816.12
DR-1301-S1	3/4/2019	11.70	24.84	827.04	815.34
DR-1301-S1	9/6/2019	13.27	24.84	827.04	813.77
DR-1301-S1	3/4/2020	11.97	24.82	827.04	815.07
DR-1301-S1	3/5/2021	13.46	24.89	827.04	813.58
DR-1301-S1	10/8/2021	13.00	24.90	827.04	814.04
DR-1301-S1	3/1/2022	11.1	24.80	827.04	815.94
IW-1301-S1	3/3/2017	12.03	23.62	826.97	814.94
IW-1301-S1	9/6/2017	12.53	23.85	826.97	814.44
IW-1301-S1	3/6/2018	11.02	23.88	826.97	815.95
IW-1301-S1	9/12/2018	11.00	24.80	826.97	815.97
IW-1301-S1	3/4/2019	11.62	23.87	826.97	815.35
IW-1301-S1	9/6/2019	13.21	23.80	826.97	813.76
IW-1301-S1	3/4/2020	11.90	23.87	826.97	815.07
IW-1301-S1	3/5/2021	13.35	23.90	826.97	813.62
IW-1301-S1	10/8/2021	13.00	24.00	826.97	813.97
IW-1301-S1	3/1/2022	11.05	23.88	826.97	815.92
MW-0101-P1	11/15/2004	8.13	9.85	826.36	818.23
MW-0101-P1	10/25/2005	9.51	9.98	826.36	816.85
MW-0101-P1	3/24/2006	Abandoned Well			
MW-0101-S1U	11/15/2004	11.15	17.50	826.36	815.21
MW-0101-S1U	10/25/2005	12.02	17.51	826.36	814.34
MW-0101-S1U	3/24/2006	10.52	17.23	826.36	815.84
MW-0101-S1U	3/31/2006	9.75	17.23	826.36	816.61
MW-0101-S1U	4/28/2006	10.42	NM	826.36	815.94
MW-0101-S1U	12/5/2006	9.13	17.51	826.36	817.23
MW-0101-S1U	3/8/2007	10.21	17.51	826.36	816.15
MW-0101-S1U	1/16/2008	10.69	17.61	826.36	815.67
MW-0101-S1U	11/11/2008	14.31	17.46	826.36	812.05
MW-0101-S1U	2/17/2009	12.66	NM	826.36	813.70
MW-0101-S1U	6/12/2009	11.18	NM	826.36	815.18
MW-0101-S1U	3/29/2012	11.23	17.70	826.36	815.13
MW-0101-S1U	10/9/2012	13.76	17.50	826.36	812.60
MW-0101-S1U	3/12/2013	11.73	17.50	826.36	814.63
MW-0101-S1U	9/24/2013	12.70	17.76	826.36	813.66
MW-0101-S1U	4/22/2014	11.46	17.66	826.36	814.90
MW-0101-S1U	9/3/2014	13.09	17.64	826.36	813.27
MW-0101-S1U	3/10/2015	12.03	16.64	826.36	814.33
MW-0101-S1U	9/8/2015	12.10	17.45	826.36	814.26
MW-0101-S1U	3/10/2016	11.68	17.77	826.36	814.68

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0101-S1U	9/7/2016	12.47	17.64	826.36	813.89
MW-0101-S1U	11/16/2016	12.63	NM	826.36	813.73
MW-0101-S1U	3/3/2017	11.22	17.37	825.74	814.52
MW-0101-S1U	9/6/2017	11.69	17.61	825.74	814.05
MW-0101-S1U	3/6/2018	10.19	17.85	825.74	815.55
MW-0101-S1U	9/12/2018	10.14	17.62	825.74	815.60
MW-0101-S1U	3/4/2019	10.81	17.60	825.74	814.93
MW-0101-S1U	9/6/2019	12.35	17.65	825.74	813.39
MW-0101-S1U	3/4/2020	11.02	17.65	825.74	814.72
MW-0101-S1U	3/5/2021	12.44	17.68	825.74	813.30
MW-0101-S1U	10/8/2021	12.00	17.67	825.74	813.74
MW-0101-S1U	3/1/2022	10.20	17.63	825.74	815.54
MW-0102-S1U	11/15/2004	11.10	26.00	826.36	815.26
MW-0102-S1U	9/20/2005	12.28	26.14	826.36	814.08
MW-0102-S1U	10/20/2005	12.12	26.28	826.36	814.24
MW-0102-S1U	10/25/2005	12.03	26.28	826.36	814.33
MW-0102-S1U	3/22/2006	10.50	25.90	826.36	815.86
MW-0102-S1U	3/31/2006	9.73	25.90	826.36	816.63
MW-0102-S1U	4/28/2006	10.47	NM	826.36	815.89
MW-0102-S1U	12/5/2006	9.33	NM	826.36	817.03
MW-0102-S1U	3/8/2007	10.32	26.28	826.36	816.04
MW-0102-S1U	1/16/2008	11.00	26.40	826.36	815.36
MW-0102-S1U	11/11/2008	14.33	26.26	826.36	812.03
MW-0102-S1U	2/17/2009	12.51	NM	826.36	813.85
MW-0102-S1U	6/12/2009	11.18	NM	826.36	815.18
MW-0102-S1U	3/29/2012	11.25	26.43	826.36	815.11
MW-0102-S1U	10/9/2012	13.76	26.25	826.36	812.60
MW-0102-S1U	3/12/2013	11.91	26.15	826.36	814.45
MW-0102-S1U	9/24/2013	12.74	26.41	826.36	813.62
MW-0102-S1U	4/22/2014	11.45	26.37	826.36	814.91
MW-0102-S1U	9/3/2014	13.06	26.40	826.36	813.30
MW-0102-S1U	3/10/2015	12.02	26.38	826.36	814.34
MW-0102-S1U	9/8/2015	12.15	26.21	826.36	814.21
MW-0102-S1U	3/10/2016	11.63	27.46	826.36	814.73
MW-0102-S1U	9/7/2016	12.39	26.41	826.36	813.97
MW-0102-S1U	11/16/2016	12.66	NM	826.36	813.70
MW-0102-S1U	3/3/2017	11.17	26.12	825.63	814.46
MW-0102-S1U	9/6/2017	11.70	26.38	825.63	813.93
MW-0102-S1U	3/6/2018	10.23	26.43	825.63	815.40
MW-0102-S1U	9/12/2018	10.12	26.34	825.63	815.51
MW-0102-S1U	3/4/2019	10.84	26.39	825.63	814.79
MW-0102-S1U	9/6/2019	12.38	26.35	825.63	813.25
MW-0102-S1U	3/4/2020	11.02	26.32	825.63	814.61

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0102-S1U	3/5/2021	12.41	26.40	825.63	813.22
MW-0102-S1U	10/8/2021	12.02	26.23	825.63	813.61
MW-0102-S1U	3/1/2022	10.23	26.35	825.63	815.40
MW-0103-S1U	10/25/2005	13.47	NM	828.15	814.68
MW-0103-S1U	11/15/2005	12.60	20.00	828.15	815.55
MW-0103-S1U	3/22/2006	12.03	19.76	828.15	816.12
MW-0103-S1U	3/31/2006	11.26	19.76	828.15	816.89
MW-0103-S1U	4/28/2006	11.91	NM	828.15	816.24
MW-0103-S1U	12/5/2006	10.70	19.77	828.15	817.45
MW-0103-S1U	3/8/2007	11.71	19.76	828.15	816.44
MW-0103-S1U	1/16/2008	12.46	19.89	828.15	815.69
MW-0103-S1U	11/11/2008	15.87	19.81	828.15	812.28
MW-0103-S1U	2/17/2009	14.06	NM	828.15	814.09
MW-0103-S1U	6/12/2009	12.63	NM	828.15	815.52
MW-0103-S1U	10/9/2012	15.30	19.66	828.15	812.85
MW-0103-S1U	3/12/2013	13.47	19.66	828.15	814.68
MW-0103-S1U	9/24/2013	14.29	19.75	828.15	813.86
MW-0103-S1U	4/22/2014	12.94	19.74	828.15	815.21
MW-0103-S1U	9/3/2014	14.59	19.62	828.15	813.56
MW-0103-S1U	3/10/2015	13.55	19.65	828.15	814.60
MW-0103-S1U	9/8/2015	13.57	19.64	828.15	814.58
MW-0103-S1U	3/10/2016	13.08	19.73	828.15	815.07
MW-0103-S1U	9/7/2016	13.90	19.72	828.15	814.25
MW-0103-S1U	11/16/2016	14.19	NM	828.15	813.96
MW-0103-S1U	3/3/2017	12.71	19.75	827.57	814.86
MW-0103-S1U	9/6/2017	13.18	19.68	827.57	814.39
MW-0103-S1U	3/6/2018	11.62	19.67	827.57	815.95
MW-0103-S1U	9/12/2018	11.58	19.61	827.57	815.99
MW-0103-S1U	3/4/2019	12.29	19.70	827.57	815.28
MW-0103-S1U	9/6/2019	13.82	19.70	827.57	813.75
MW-0103-S1U	3/4/2020	12.52	19.76	827.57	815.05
MW-0103-S1U	3/5/2021	14.03	19.73	827.57	813.54
MW-0103-S1U	10/8/2021	13.49	17.68	827.57	814.08
MW-0103-S1U	3/1/2022	11.68	19.63	827.57	815.89
MW-0501-P1	9/20/2005	12.09	18.85	828.62	816.53
MW-0501-P1	10/18/2005	13.22	18.95	828.62	815.40
MW-0501-P1	10/25/2005	12.97	18.95	828.62	815.65
MW-0501-P1	3/22/2006	12.67	18.95	828.62	815.95
MW-0501-P1	3/31/2006	11.84	18.95	828.62	816.78
MW-0501-P1	4/28/2006	11.29	NM	828.62	817.33
MW-0501-P1	12/5/2006	10.46	18.69	828.62	818.16
MW-0501-P1	3/8/2007	10.79	18.71	828.62	817.83
MW-0501-P1	1/16/2008	11.82	18.80	828.62	816.80

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0501-P1	11/11/2008	14.48	18.71	828.62	814.14
MW-0501-P1	2/17/2009	11.93	NM	828.62	816.69
MW-0501-S1	3/22/2006	12.18	34.39	828.65	816.47
MW-0501-S1	3/31/2006	11.41	34.39	828.65	817.24
MW-0501-S1	4/28/2006	12.07	NM	828.65	816.58
MW-0501-S1	12/5/2006	10.84	33.95	828.65	817.81
MW-0501-S1	3/8/2007	11.90	33.74	828.65	816.75
MW-0501-S1	1/16/2008	12.67	33.95	828.65	815.98
MW-0501-S1	11/11/2008	16.10	33.60	828.65	812.55
MW-0501-S1	2/17/2009	14.44	NM	828.65	814.21
MW-0501-S1	6/12/2009	12.77	NM	828.65	815.88
MW-0501-S1	4/13/2010	12.52	33.33	828.65	816.13
MW-0501-S1	9/5/2010	15.30	33.00	828.65	813.35
MW-0501-S1	4/20/2011	12.12	32.98	828.65	816.53
MW-0501-S1	9/27/2011	13.26	33.14	828.65	815.39
MW-0501-S1	3/29/2012	12.89	33.11	828.65	815.76
MW-0501-S1	10/9/2012	15.59	32.95	828.65	813.06
MW-0501-S1	3/12/2013	13.73	32.95	828.65	814.92
MW-0501-S1	9/24/2013	14.48	33.00	828.65	814.17
MW-0501-S1	4/22/2014	13.08	32.99	828.65	815.57
MW-0501-S1	9/3/2014	14.82	32.94	828.65	813.83
MW-0501-S1	3/10/2015	13.78	32.86	828.65	814.87
MW-0501-S1	9/8/2015	13.92	32.60	828.65	814.73
MW-0501-S1	3/10/2016	13.34	32.84	828.65	815.31
MW-0501-S1	9/7/2016	14.11	32.85	828.65	814.54
MW-0501-S1	11/16/2016	14.45	NM	828.65	814.20
MW-0501-S1	3/3/2017	12.89	32.51	827.92	815.03
MW-0501-S1	9/6/2017	13.37	32.71	827.92	814.55
MW-0501-S1	3/6/2018	11.81	32.71	827.92	816.11
MW-0501-S1	9/12/2018	11.71	32.62	827.92	816.21
MW-0501-S1	3/4/2019	12.45	32.69	827.92	815.47
MW-0501-S1	9/6/2019	14.02	32.60	827.92	813.90
MW-0501-S1	3/4/2020	12.77	32.60	827.92	815.15
MW-0501-S1	3/5/2021	14.31	32.60	827.92	813.61
MW-0501-S1	10/8/2021	13.74	32.70	827.92	814.18
MW-0501-S1	3/1/2022	11.82	32.52	827.92	816.10
MW-0501-S2	10/18/2005	14.87	76.30	828.75	813.88
MW-0501-S2	10/25/2005	15.02	76.30	828.75	813.73
MW-0501-S2	3/21/2006	12.83	76.30	828.75	815.92
MW-0501-S2	3/31/2006	11.98	76.30	828.75	816.77
MW-0501-S2	4/28/2006	12.00	NM	828.75	816.75
MW-0501-S2	12/5/2006	9.83	76.13	828.75	818.92
MW-0501-S2	3/8/2007	11.79	76.09	828.75	816.96

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0501-S2	1/16/2008	14.80	76.20	828.75	813.95
MW-0501-S2	11/11/2008	21.21	76.12	828.75	807.54
MW-0501-S2	2/17/2009	17.60	NM	828.75	811.15
MW-0501-S2	6/12/2009	15.49	NM	828.75	813.26
MW-0501-S2	4/13/2010	14.37	76.12	828.75	814.38
MW-0501-S2	9/5/2010	19.74	76.11	828.75	809.01
MW-0501-S2	4/20/2011	15.01	76.00	828.75	813.74
MW-0501-S2	9/27/2011	17.44	75.24	828.75	811.31
MW-0501-S2	3/29/2012	14.62	76.21	828.75	814.13
MW-0501-S2	10/9/2012	20.48	76.15	828.75	808.27
MW-0501-S2	3/12/2013	15.08	76.15	828.75	813.67
MW-0501-S2	9/24/2013	17.93	76.20	828.75	810.82
MW-0501-S2	4/22/2014	15.80	77.48	828.75	812.95
MW-0501-S2	9/3/2014	19.70	77.62	828.75	809.05
MW-0501-S2	3/10/2015	17.08	NM	828.75	811.67
MW-0501-S2	9/8/2015	15.21	74.02	828.75	813.54
MW-0501-S2	3/10/2016	15.33	76.24	828.75	813.42
MW-0501-S2	9/7/2016	18.36	76.25	828.75	810.39
MW-0501-S2	11/16/2016	16.55	NM	828.75	812.20
MW-0501-S2	3/3/2017	13.88	76.05	828.08	814.20
MW-0501-S2	9/6/2017	16.21	76.20	828.08	811.87
MW-0501-S2	3/6/2018	12.96	76.23	828.08	815.12
MW-0501-S2	9/12/2018	13.58	76.10	828.08	814.50
MW-0501-S2	3/4/2019	13.85	76.24	828.08	814.23
MW-0501-S2	9/6/2019	18.12	76.12	828.08	809.96
MW-0501-S2	3/4/2020	12.48	76.20	828.08	815.60
MW-0501-S2	3/5/2021	17.98	76.22	828.08	810.10
MW-0501-S2	10/8/2021	18.53	76.50	828.08	809.55
MW-0501-S2	3/1/2022	14.05	76.19	828.08	814.03
MW-0501-S3	10/20/2005	15.00	94.98	828.78	813.78
MW-0501-S3	10/25/2005	15.04	94.98	828.78	813.74
MW-0501-S3	3/21/2006	12.81	94.98	828.78	815.97
MW-0501-S3	3/31/2006	12.06	94.98	828.78	816.72
MW-0501-S3	4/28/2006	12.02	NM	828.78	816.76
MW-0501-S3	12/5/2006	10.48	94.75	828.78	818.30
MW-0501-S3	3/8/2007	11.86	94.64	828.78	816.92
MW-0501-S3	1/16/2008	14.86	94.80	828.78	813.92
MW-0501-S3	11/11/2008	21.27	94.85	828.78	807.51
MW-0501-S3	2/17/2009	17.68	NM	828.78	811.10
MW-0501-S3	6/12/2009	15.58	NM	828.78	813.20
MW-0501-S3	4/13/2010	14.42	94.73	828.78	814.36
MW-0501-S3	9/5/2010	19.82	96.05	828.78	808.96
MW-0501-S3	4/20/2011	15.11	94.60	828.78	813.67

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0501-S3	9/27/2011	17.44	94.90	828.78	811.34
MW-0501-S3	10/9/2012	14.20	31.91	828.78	814.58
MW-0501-S3	8/24/2015	Abandoned Well			
MW-0502-S1	9/20/2005	12.20	32.59	826.34	814.14
MW-0502-S1	10/19/2005	11.91	32.78	826.34	814.43
MW-0502-S1	10/25/2005	11.91	32.78	826.34	814.43
MW-0502-S1	3/24/2006	10.41	32.54	826.34	815.93
MW-0502-S1	3/31/2006	9.64	32.54	826.34	816.70
MW-0502-S1	4/28/2006	10.32	NM	826.34	816.02
MW-0502-S1	12/5/2006	9.25	NM	826.34	817.09
MW-0502-S1	3/8/2007	10.12	32.50	826.34	816.22
MW-0502-S1	1/16/2008	10.95	32.62	826.34	815.39
MW-0502-S1	11/11/2008	14.22	32.40	826.34	812.12
MW-0502-S1	2/17/2009	12.54	NM	826.34	813.80
MW-0502-S1	6/12/2009	11.04	NM	826.34	815.30
MW-0502-S1	4/13/2010	10.78	32.55	826.34	815.56
MW-0502-S1	9/5/2010	13.46	32.60	826.34	812.88
MW-0502-S1	4/20/2011	10.29	32.45	826.34	816.05
MW-0502-S1	9/27/2011	11.44	32.65	826.34	814.90
MW-0502-S1	3/29/2012	11.08	32.61	826.34	815.26
MW-0502-S1	10/9/2012	13.65	32.51	826.34	812.69
MW-0502-S1	3/12/2013	11.73	32.51	826.34	814.61
MW-0502-S1	9/24/2013	12.62	32.63	826.34	813.72
MW-0502-S1	4/22/2014	11.35	32.62	826.34	814.99
MW-0502-S1	9/3/2014	12.96	32.66	826.34	813.38
MW-0502-S1	3/10/2015	11.90	32.63	826.34	814.44
MW-0502-S1	9/8/2015	12.02	32.39	826.34	814.32
MW-0502-S1	3/10/2016	11.51	32.62	826.34	814.83
MW-0502-S1	9/7/2016	12.26	32.55	826.34	814.08
MW-0502-S1	11/16/2016	12.51	NM	826.34	813.83
MW-0502-S1	3/3/2017	11.08	31.95	825.72	814.64
MW-0502-S1	9/6/2017	11.58	32.19	825.72	814.14
MW-0502-S1	3/6/2018	10.04	32.22	825.72	815.68
MW-0502-S1	9/12/2018	10.02	32.15	825.72	815.70
MW-0502-S1	3/4/2019	10.65	32.12	825.72	815.07
MW-0502-S1	9/6/2019	12.02	32.20	825.72	813.70
MW-0502-S1	3/4/2020	10.88	32.23	825.72	814.84
MW-0502-S1	3/5/2021	12.31	32.25	825.72	813.41
MW-0502-S1	10/8/2021	11.93	32.18	825.72	813.79
MW-0502-S1	3/1/2022	10.50	32.13	825.72	815.22
MW-0503-S1	10/18/2005	12.51	32.57	826.82	814.31
MW-0503-S1	10/25/2005	12.51	32.57	826.82	814.31
MW-0503-S1	3/24/2006	11.09	32.27	826.82	815.73

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0503-S1	3/31/2006	10.32	32.27	826.82	816.50
MW-0503-S1	4/28/2006	11.00	NM	826.82	815.82
MW-0503-S1	12/5/2006	9.84	NM	826.82	816.98
MW-0503-S1	3/8/2007	10.80	32.32	826.82	816.02
MW-0503-S1	1/16/2008	11.57	32.42	826.82	815.25
MW-0503-S1	11/11/2008	14.75	32.20	826.82	812.07
MW-0503-S1	2/17/2009	12.96	NM	826.82	813.86
MW-0503-S1	6/12/2009	11.68	NM	826.82	815.14
MW-0503-S1	4/13/2010	11.46	32.16	826.82	815.36
MW-0503-S1	9/5/2010	14.04	32.00	826.82	812.78
MW-0503-S1	4/20/2011	10.87	31.98	826.82	815.95
MW-0503-S1	9/27/2011	11.99	32.35	826.82	814.83
MW-0503-S1	3/29/2012	11.77	32.40	826.82	815.05
MW-0503-S1	10/9/2012	14.20	31.91	826.82	812.62
MW-0503-S1	3/12/2013	12.35	31.91	826.82	814.47
MW-0503-S1	9/24/2013	13.20	32.30	826.82	813.62
MW-0503-S1	4/22/2014	11.95	31.87	826.82	814.87
MW-0503-S1	9/3/2014	13.51	31.96	826.82	813.31
MW-0503-S1	3/10/2015	12.49	31.56	826.82	814.33
MW-0503-S1	9/8/2015	12.62	31.20	826.82	814.20
MW-0503-S1	3/10/2016	12.11	31.32	826.82	814.71
MW-0503-S1	9/7/2016	12.80	13.34	826.82	814.02
MW-0503-S1	11/16/2016	13.13	NM	826.82	813.69
MW-0503-S1	3/3/2017	10.73	30.90	826.25	815.52
MW-0503-S1	9/6/2017	12.20	30.94	826.25	814.05
MW-0503-S1	3/6/2018	10.73	30.94	826.25	815.52
MW-0503-S1	9/12/2018	10.66	30.80	826.25	815.59
MW-0503-S1	3/4/2019	11.32	30.78	826.25	814.93
MW-0503-S1	9/6/2019	12.85	30.85	826.25	813.40
MW-0503-S1	3/4/2020	11.48	30.80	826.25	814.77
MW-0503-S1	3/5/2021	12.83	30.71	826.25	813.42
MW-0503-S1	10/8/2021	12.43	30.67	826.25	813.82
MW-0503-S1	3/1/2022	10.38	29.20	826.25	815.87
MW-0503-S2	10/18/2005	13.28	68.33	826.81	813.53
MW-0503-S2	10/25/2005	13.27	68.33	826.81	813.54
MW-0503-S2	3/24/2006	10.38	68.05	826.81	816.43
MW-0503-S2	3/31/2006	9.53	68.05	826.81	817.28
MW-0503-S2	4/28/2006	10.51	NM	826.81	816.30
MW-0503-S2	12/5/2006	9.06	NM	826.81	817.75
MW-0503-S2	3/8/2007	10.28	68.13	826.81	816.53
MW-0503-S2	1/16/2008	12.92	68.30	826.81	813.89
MW-0503-S2	11/11/2008	18.80	68.19	826.81	808.01
MW-0503-S2	2/17/2009	15.41	NM	826.81	811.40

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0503-S2	6/12/2009	13.57	NM	826.81	813.24
MW-0503-S2	3/10/2016	13.46	NM	826.81	813.35
MW-0503-S2	9/7/2016	14.76	67.89	826.81	812.05
MW-0503-S2	11/16/2016	14.69	NM	826.81	812.12
MW-0503-S2	3/3/2017	12.30	68.37	826.25	813.95
MW-0503-S2	9/6/2017	14.29	68.23	826.25	811.96
MW-0503-S2	3/7/2018	11.32	68.76	826.25	814.93
MW-0503-S2	9/12/2018	11.71	68.20	826.25	814.54
MW-0503-S2	3/4/2019	13.21	68.25	826.25	813.04
MW-0503-S2	9/6/2019	16.08	68.30	826.25	810.17
MW-0503-S2	3/4/2020	10.95	68.35	826.25	815.30
MW-0503-S2	3/5/2021	15.75	68.38	826.25	810.50
MW-0503-S2	10/8/2021	16.38	68.33	826.25	809.87
MW-0503-S2	3/1/2022	12.18	68.20	826.25	814.07
MW-0504-I2	10/18/2005	19.66	39.87	826.51	806.85
MW-0504-I2	10/25/2005	13.03	39.87	826.51	813.48
MW-0504-I2	3/27/2006	11.53	39.61	826.51	814.98
MW-0504-I2	3/31/2006	10.71	39.61	826.51	815.80
MW-0504-I2	4/28/2006	11.19	NM	826.51	815.32
MW-0504-I2	12/5/2006	10.08	NM	826.51	816.43
MW-0504-I2	3/8/2007	11.60	39.65	826.51	814.91
MW-0504-I2	1/16/2008	11.67	39.80	826.51	814.84
MW-0504-I2	11/11/2008	14.84	39.71	826.51	811.67
MW-0504-I2	2/17/2009	12.99	NM	826.51	813.52
MW-0504-S1	9/20/2005	12.51	29.73	826.15	813.64
MW-0504-S1	10/18/2005	12.25	29.19	826.15	813.90
MW-0504-S1	10/25/2005	12.23	29.19	826.15	813.92
MW-0504-S1	3/27/2006	11.10	28.69	826.15	815.05
MW-0504-S1	3/31/2006	10.33	28.69	826.15	815.82
MW-0504-S1	4/28/2006	10.88	NM	826.15	815.27
MW-0504-S1	12/5/2006	10.78	NM	826.15	815.37
MW-0504-S1	3/8/2007	10.68	30.82	826.15	815.47
MW-0504-S1	1/16/2008	11.25	30.90	826.15	814.90
MW-0504-S1	11/11/2008	14.40	30.76	826.15	811.75
MW-0504-S1	2/17/2009	12.58	NM	826.15	813.57
MW-0504-S1	6/12/2009	11.51	NM	826.15	814.64
MW-0504-S1	10/9/2012	13.84	30.71	826.15	812.31
MW-0504-S1	3/12/2013	12.02	30.71	826.15	814.13
MW-0504-S1	9/24/2013	12.90	30.98	826.15	813.25
MW-0504-S1	4/22/2014	11.81	30.91	826.15	814.34
MW-0504-S1	9/3/2014	13.21	31.71	826.15	812.94
MW-0504-S1	3/10/2015	12.22	30.55	826.15	813.93
MW-0504-S1	9/8/2015	12.38	30.15	826.15	813.77

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0504-S1	3/10/2016	11.84	30.76	826.15	814.31
MW-0504-S1	9/7/2016	12.58	30.50	826.15	813.57
MW-0504-S1	11/16/2016	12.80	NM	826.15	813.35
MW-0504-S1	3/3/2017	11.49	29.93	825.55	814.06
MW-0504-S1	9/6/2017	11.96	30.40	825.55	813.59
MW-0504-S1	3/6/2018	10.83	30.05	825.55	814.72
MW-0504-S1	9/12/2018	10.58	30.03	825.55	814.97
MW-0504-S1	3/4/2019	11.16	30.13	825.55	814.39
MW-0504-S1	9/6/2019	13.55	30.15	825.55	812.00
MW-0504-S1	3/4/2020	11.21	29.90	825.55	814.34
MW-0504-S1	3/5/2021	12.47	29.98	825.55	813.08
MW-0504-S1	10/8/2021	12.18	29.90	825.55	813.37
MW-0504-S1	3/1/2022	10.55	29.85	825.55	815.00
MW-0504-S2	3/27/2006	10.23	60.45	826.41	816.18
MW-0504-S2	3/31/2006	9.38	60.45	826.41	817.03
MW-0504-S2	4/28/2006	10.11	NM	826.41	816.30
MW-0504-S2	12/5/2006	8.70	NM	826.41	817.71
MW-0504-S2	3/8/2007	10.00	60.52	826.41	816.41
MW-0504-S2	1/16/2008	12.50	60.63	826.41	813.91
MW-0504-S2	11/11/2008	18.46	60.55	826.41	807.95
MW-0504-S2	2/17/2009	14.97	NM	826.41	811.44
MW-0504-S2	6/12/2009	13.14	NM	826.41	813.27
MW-0504-S2	3/10/2016	13.06	NM	826.41	813.35
MW-0504-S2	9/7/2016	15.76	60.43	826.41	810.65
MW-0504-S2	11/16/2016	14.31	NM	826.41	812.10
MW-0504-S2	3/3/2017	11.89	60.48	825.77	813.88
MW-0504-S2	9/6/2017	12.28	39.85	825.77	813.49
MW-0504-S2	3/6/2018	11.49	39.87	825.77	814.28
MW-0504-S2	9/12/2018	11.35	60.68	825.77	814.42
MW-0504-S2	3/4/2019	11.63	60.65	825.77	814.14
MW-0504-S2	9/6/2019	15.55	60.62	825.77	810.22
MW-0504-S2	3/4/2020	10.60	60.70	825.77	815.17
MW-0504-S2	3/5/2021	15.38	60.78	825.77	810.39
MW-0504-S2	10/8/2021	15.83	60.80	825.77	809.94
MW-0504-S2	3/1/2022	11.77	60.69	825.77	814.00
MW-0505-B1	12/5/2006	8.69	NM	826.50	817.81
MW-0505-B1	3/8/2007	8.98	83.90	826.50	817.52
MW-0505-B1	1/16/2008	11.56	83.95	826.50	814.94
MW-0505-B1	11/11/2008	17.51	83.90	826.50	808.99
MW-0505-B1	2/17/2009	14.06	NM	826.50	812.44
MW-0505-B1	6/12/2009	12.18	NM	826.50	814.32
MW-0505-B1	4/13/2010	11.21	83.97	826.50	815.29
MW-0505-B1	9/5/2010	16.22	84.00	826.50	810.28

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0505-B1	4/20/2011	11.65	83.82	826.50	814.85
MW-0505-B1	9/27/2011	14.56	84.08	826.50	811.94
MW-0505-B1	9/3/2015	Abandoned Well			
MW-0505-S1	9/20/2005	11.42	39.00	825.44	814.02
MW-0505-S1	10/19/2005	11.19	40.28	825.44	814.25
MW-0505-S1	10/25/2005	11.16	40.28	825.44	814.28
MW-0505-S1	3/23/2006	9.70	40.00	825.44	815.74
MW-0505-S1	3/31/2006	8.93	40.00	825.44	816.51
MW-0505-S1	4/28/2006	9.69	NM	825.44	815.75
MW-0505-S1	12/5/2006	8.52	NM	825.44	816.92
MW-0505-S1	3/8/2007	9.48	40.71	825.44	815.96
MW-0505-S1	1/16/2008	10.15	40.80	825.44	815.29
MW-0505-S1	11/11/2008	13.46	40.65	825.44	811.98
MW-0505-S1	2/17/2009	11.63	NM	825.44	813.81
MW-0505-S1	6/12/2009	10.34	NM	825.44	815.10
MW-0505-S1	10/9/2012	12.47	40.67	825.44	812.97
MW-0505-S1	3/12/2013	11.02	40.67	825.44	814.42
MW-0505-S1	9/24/2013	11.85	40.84	825.44	813.59
MW-0505-S1	4/22/2014	10.64	40.41	825.44	814.80
MW-0505-S1	9/3/2014	12.20	40.80	825.44	813.24
MW-0505-S1	3/10/2015	11.17	40.75	825.44	814.27
MW-0505-S1	9/8/2015	11.30	40.52	825.44	814.14
MW-0505-S1	3/10/2016	10.77	40.75	825.44	814.67
MW-0505-S1	9/7/2016	11.53	40.71	825.44	813.91
MW-0505-S1	11/16/2016	11.78	NM	825.44	813.66
MW-0505-S1	3/3/2017	10.37	40.42	824.79	814.42
MW-0505-S1	9/6/2017	10.82	40.62	824.79	813.97
MW-0505-S1	3/6/2018	9.41	40.59	824.79	815.38
MW-0505-S1	9/12/2018	9.30	40.60	824.79	815.49
MW-0505-S1	3/4/2019	9.97	40.55	824.79	814.82
MW-0505-S1	9/6/2019	11.52	40.50	824.79	813.27
MW-0505-S1	3/4/2020	10.13	40.55	824.79	814.66
MW-0505-S1	3/5/2021	11.52	40.48	824.79	813.27
MW-0505-S1	10/8/2021	11.12	40.55	824.79	813.67
MW-0505-S1	3/1/2022	9.35	40.45	824.79	815.44
MW-0505-S2	10/19/2005	12.37	67.63	825.06	812.69
MW-0505-S2	10/25/2005	11.42	67.63	825.06	813.64
MW-0505-S2	3/23/2006	9.59	67.32	825.06	815.47
MW-0505-S2	3/31/2006	8.74	67.32	825.06	816.32
MW-0505-S2	4/28/2006	9.65	NM	825.06	815.41
MW-0505-S2	12/5/2006	7.27	NM	825.06	817.79
MW-0505-S2	3/8/2007	8.55	67.45	825.06	816.51
MW-0505-S2	1/16/2008	11.10	67.50	825.06	813.96

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0505-S2	11/11/2008	17.04	67.45	825.06	808.02
MW-0505-S2	2/17/2009	13.63	NM	825.06	811.43
MW-0505-S2	6/12/2009	11.76	NM	825.06	813.30
MW-0505-S2	4/13/2010	11.74	67.38	825.06	813.32
MW-0505-S2	9/5/2010	15.76	67.50	825.06	809.30
MW-0505-S2	4/20/2011	11.23	67.35	825.06	813.83
MW-0505-S2	9/27/2011	13.51	67.60	825.06	811.55
MW-0505-S2	3/29/2012	11.03	67.55	825.06	814.03
MW-0505-S2	10/9/2012	16.46	67.46	825.06	808.60
MW-0505-S2	3/12/2013	11.58	67.46	825.06	813.48
MW-0505-S2	9/24/2013	14.10	67.52	825.06	810.96
MW-0505-S2	4/22/2014	11.99	67.59	825.06	813.07
MW-0505-S2	9/3/2014	15.65	68.81	825.06	809.41
MW-0505-S2	3/10/2015	13.18	NM	825.06	811.88
MW-0505-S2	9/8/2015	13.60	67.43	825.06	811.46
MW-0505-S2	3/10/2016	11.63	NM	825.06	813.43
MW-0505-S2	9/7/2016	14.17	67.56	825.06	810.89
MW-0505-S2	11/16/2016	12.87	NM	825.06	812.19
MW-0505-S2	3/3/2017	10.46	67.39	824.41	813.95
MW-0505-S2	9/6/2017	12.48	67.58	824.41	811.93
MW-0505-S2	3/6/2018	9.49	67.58	824.41	814.92
MW-0505-S2	9/12/2018	9.98	67.52	824.41	814.43
MW-0505-S2	3/4/2019	10.35	67.54	824.41	814.06
MW-0505-S2	9/6/2019	15.20	67.58	824.41	809.21
MW-0505-S2	3/4/2020	9.11	67.40	824.41	815.30
MW-0505-S2	3/5/2021	14.03	67.58	824.41	810.38
MW-0505-S2	10/8/2021	14.50	67.70	824.41	809.91
MW-0505-S2	3/1/2022	10.35	67.50	824.41	814.06
MW-0506-I2	10/19/2005	24.10	47.56	827.18	803.08
MW-0506-I2	10/25/2005	22.82	47.56	827.18	804.36
MW-0506-I2	3/27/2006	17.97	47.27	827.18	809.21
MW-0506-I2	3/31/2006	17.15	47.27	827.18	810.03
MW-0506-I2	4/28/2006	20.02	NM	827.18	807.16
MW-0506-I2	12/5/2006	19.82	NM	827.18	807.36
MW-0506-I2	3/8/2007	15.48	47.35	827.18	811.70
MW-0506-I2	1/16/2008	14.57	47.50	827.18	812.61
MW-0506-I2	11/11/2008	15.71	47.38	827.18	811.47
MW-0506-I2	2/17/2009	16.63	NM	827.18	810.55
MW-0506-S1	10/19/2005	13.11	34.84	826.88	813.77
MW-0506-S1	10/25/2005	13.11	34.84	826.88	813.77
MW-0506-S1	3/27/2006	11.96	34.55	826.88	814.92
MW-0506-S1	3/31/2006	11.19	34.55	826.88	815.69
MW-0506-S1	4/28/2006	11.76	NM	826.88	815.12

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0506-S1	12/5/2006	10.72	NM	826.88	816.16
MW-0506-S1	3/8/2007	11.54	34.62	826.88	815.34
MW-0506-S1	1/16/2008	12.21	34.35	826.88	814.67
MW-0506-S1	11/11/2008	15.21	34.65	826.88	811.67
MW-0506-S1	2/17/2009	13.40	NM	826.88	813.48
MW-0506-S1	6/12/2009	12.38	NM	826.88	814.50
MW-0506-S1	10/9/2012	14.65	34.69	826.88	812.23
MW-0506-S1	3/12/2013	12.85	34.69	826.88	814.03
MW-0506-S1	9/24/2013	13.74	34.78	826.88	813.14
MW-0506-S1	4/22/2014	12.67	34.71	826.88	814.21
MW-0506-S1	9/3/2014	14.02	34.75	826.88	812.86
MW-0506-S1	3/10/2015	13.06	34.76	826.88	813.82
MW-0506-S1	9/8/2015	13.24	34.50	826.88	813.64
MW-0506-S1	3/10/2016	12.68	34.86	826.88	814.20
MW-0506-S1	9/7/2016	13.36	34.80	826.88	813.52
MW-0506-S1	11/16/2016	13.64	NM	826.88	813.24
MW-0506-S1	3/3/2017	12.36	34.55	826.27	813.91
MW-0506-S1	9/6/2017	12.83	34.75	826.27	813.44
MW-0506-S1	3/6/2018	11.54	34.50	826.27	814.73
MW-0506-S1	9/12/2018	11.42	34.58	826.27	814.85
MW-0506-S1	3/4/2019	12.04	34.62	826.27	814.23
MW-0506-S1	9/6/2019	13.40	34.52	826.27	812.87
MW-0506-S1	3/4/2020	12.05	34.30	826.27	814.22
MW-0506-S1	3/5/2021	13.28	34.67	826.27	812.99
MW-0506-S1	10/8/2021	13.65	34.48	826.27	812.62
MW-0506-S1	3/1/2022	11.42	34.50	826.27	814.85
MW-0506-S2	10/19/2005	13.58	72.52	827.10	813.52
MW-0506-S2	10/25/2005	13.58	72.52	827.10	813.52
MW-0506-S2	3/27/2006	11.95	72.24	827.10	815.15
MW-0506-S2	3/31/2006	11.10	72.24	827.10	816.00
MW-0506-S2	4/28/2006	10.84	NM	827.10	816.26
MW-0506-S2	12/5/2006	9.43	NM	827.10	817.67
MW-0506-S2	3/8/2007	11.72	72.26	827.10	815.38
MW-0506-S2	1/16/2008	13.20	72.40	827.10	813.90
MW-0506-S2	11/11/2008	19.11	72.35	827.10	807.99
MW-0506-S2	2/17/2009	15.69	NM	827.10	811.41
MW-0506-S2	6/12/2009	13.87	NM	827.10	813.23
MW-0506-S2	3/29/2012	13.13	72.41	827.10	813.97
MW-0506-S2	10/9/2012	18.51	72.38	827.10	808.59
MW-0506-S2	3/12/2013	13.66	72.38	827.10	813.44
MW-0506-S2	9/24/2013	16.20	72.44	827.10	810.90
MW-0506-S2	4/22/2014	14.13	72.56	827.10	812.97
MW-0506-S2	9/3/2014	17.70	73.52	827.10	809.40

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0506-S2	3/10/2015	15.27	NM	827.10	811.83
MW-0506-S2	9/8/2015	13.74	72.14	827.10	813.36
MW-0506-S2	3/10/2016	13.67	NM	827.10	813.43
MW-0506-S2	9/7/2016	16.08	72.45	827.10	811.02
MW-0506-S2	11/16/2016	13.53	NM	827.10	813.57
MW-0506-S2	3/3/2017	12.63	72.30	826.51	813.88
MW-0506-S2	9/6/2017	14.59	72.62	826.51	811.92
MW-0506-S2	3/6/2018	11.87	72.43	826.51	814.64
MW-0506-S2	9/12/2018	12.05	72.38	826.51	814.46
MW-0506-S2	3/4/2019	12.40	72.35	826.51	814.11
MW-0506-S2	9/6/2019	16.25	72.25	826.51	810.26
MW-0506-S2	3/4/2020	11.30	34.30	826.51	815.21
MW-0506-S2	3/5/2021	16.00	72.45	826.51	810.51
MW-0506-S2	10/8/2021	16.55	72.40	826.51	809.96
MW-0506-S2	3/1/2022	12.48	72.20	826.51	814.03
MW-0507-S1	10/19/2005	13.15	33.49	827.19	814.04
MW-0507-S1	10/25/2005	13.12	33.49	827.19	814.07
MW-0507-S1	3/27/2006	11.86	33.18	827.19	815.33
MW-0507-S1	3/31/2006	11.09	33.18	827.19	816.10
MW-0507-S1	4/28/2006	11.69	NM	827.19	815.50
MW-0507-S1	12/5/2006	10.58	NM	827.19	816.61
MW-0507-S1	3/8/2007	11.48	33.19	827.19	815.71
MW-0507-S1	1/16/2008	12.18	33.35	827.19	815.01
MW-0507-S1	11/11/2008	15.27	33.15	827.19	811.92
MW-0507-S1	2/17/2009	13.50	NM	827.19	813.69
MW-0507-S1	6/12/2009	12.33	NM	827.19	814.86
MW-0507-S1	4/13/2010	12.13	33.27	827.19	815.06
MW-0507-S1	9/5/2010	14.61	33.20	827.19	812.58
MW-0507-S1	4/20/2011	11.54	33.16	827.19	815.65
MW-0507-S1	9/27/2011	12.60	33.35	827.19	814.59
MW-0507-S1	3/29/2012	12.41	33.32	827.19	814.78
MW-0507-S1	10/9/2012	14.74	33.11	827.19	812.45
MW-0507-S1	3/12/2013	12.92	33.11	827.19	814.27
MW-0507-S1	9/24/2013	13.78	33.32	827.19	813.41
MW-0507-S1	4/22/2014	12.63	33.37	827.19	814.56
MW-0507-S1	9/3/2014	14.08	33.29	827.19	813.11
MW-0507-S1	3/10/2015	13.08	32.88	827.19	814.11
MW-0507-S1	9/8/2015	13.23	32.40	827.19	813.96
MW-0507-S1	3/10/2016	12.71	32.39	827.19	814.48
MW-0507-S1	9/7/2016	13.36	33.08	827.19	813.83
MW-0507-S1	11/16/2016	13.69	NM	827.19	813.50
MW-0507-S1	3/3/2017	12.37	31.89	826.48	814.11
MW-0507-S1	9/6/2017	12.78	32.64	826.48	813.70

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0507-S1	3/6/2018	11.48	32.02	826.48	815.00
MW-0507-S1	9/12/2018	11.36	31.85	826.48	815.12
MW-0507-S1	3/4/2019	12.00	31.95	826.48	814.48
MW-0507-S1	9/6/2019	13.42	32.00	826.48	813.06
MW-0507-S1	3/4/2020	12.07	31.70	826.48	814.41
MW-0507-S1	3/5/2021	13.36	31.73	826.48	813.12
MW-0507-S1	10/8/2021	13.05	36.92	826.48	813.43
MW-0507-S1	3/1/2022	11.39	31.73	826.48	815.09
MW-0509-S1	9/20/2005	12.18	38.00	826.33	814.15
MW-0509-S1	10/25/2005	11.92	38.11	826.33	814.41
MW-0509-S1	3/23/2006	10.43	37.82	826.33	815.90
MW-0509-S1	3/31/2006	9.66	37.82	826.33	816.67
MW-0509-S1	4/28/2006	10.35	NM	826.33	815.98
MW-0509-S1	12/5/2006	9.20	37.90	826.33	817.13
MW-0509-S1	3/8/2007	10.20	37.89	826.33	816.13
MW-0509-S1	1/16/2008	10.89	38.00	826.33	815.44
MW-0509-S1	11/11/2008	14.24	37.92	826.33	812.09
MW-0509-S1	2/17/2009	12.38	NM	826.33	813.95
MW-0509-S1	6/12/2009	11.04	NM	826.33	815.29
MW-0509-S1	4/13/2010	10.82	37.91	826.33	815.51
MW-0509-S1	9/5/2010	13.45	37.90	826.33	812.88
MW-0509-S1	4/20/2011	10.29	37.85	826.33	816.04
MW-0509-S1	9/27/2011	11.43	38.08	826.33	814.90
MW-0509-S1	3/29/2012	11.13	38.00	826.33	815.20
MW-0509-S1	10/9/2012	13.65	37.98	826.33	812.68
MW-0509-S1	3/12/2013	13.45	37.98	826.33	812.88
MW-0509-S1	9/24/2013	12.62	38.03	826.33	813.71
MW-0509-S1	4/22/2014	11.35	38.06	826.33	814.98
MW-0509-S1	3/10/2015	11.89	38.03	826.33	814.44
MW-0509-S1	9/8/2015	12.03	37.88	826.33	814.30
MW-0509-S1	3/10/2016	11.51	38.01	826.33	814.82
MW-0509-S1	9/7/2016	12.27	38.05	826.33	814.06
MW-0509-S1	11/16/2016	12.55	NM	826.33	813.78
MW-0509-S1	3/3/2017	11.08	38.04	825.72	814.64
MW-0509-S1	9/6/2017	11.59	38.00	825.72	814.13
MW-0509-S1	3/6/2018	10.10	37.89	825.72	815.62
MW-0509-S1	9/12/2018	10.02	38.01	825.72	815.70
MW-0509-S1	3/4/2019	10.72	38.00	825.72	815.00
MW-0509-S1	9/3/2019	12.98	38.02	826.33	813.35
MW-0509-S1	9/6/2019	12.25	28.00	825.72	813.47
MW-0509-S1	3/4/2020	10.88	37.90	825.72	814.84
MW-0509-S1	3/5/2021	12.29	37.55	825.72	813.43
MW-0509-S1	10/8/2021	11.88	37.75	825.72	813.84

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0509-S1	3/1/2022	10.10	37.96	825.72	815.62
MW-0509-I2	10/19/2005	12.58	55.96	826.32	813.74
MW-0509-I2	10/25/2005	12.66	55.96	826.32	813.66
MW-0509-I2	3/23/2006	9.87	55.65	826.32	816.45
MW-0509-I2	3/31/2006	9.05	55.65	826.32	817.27
MW-0509-I2	4/28/2006	9.81	NM	826.32	816.51
MW-0509-I2	12/5/2006	8.36	55.74	826.32	817.96
MW-0509-I2	3/8/2007	9.68	55.67	826.32	816.64
MW-0509-I2	1/16/2008	12.37	55.79	826.32	813.95
MW-0509-I2	11/11/2008	18.42	55.60	826.32	807.90
MW-0509-I2	2/17/2009	14.94	NM	826.32	811.38
MW-0516-S1	10/19/2005	13.42	32.88	827.98	814.56
MW-0516-S1	10/25/2005	13.42	32.88	827.98	814.56
MW-0516-S1	3/23/2006	11.88	32.61	827.98	816.10
MW-0516-S1	3/31/2006	11.13	32.61	827.98	816.85
MW-0516-S1	4/28/2006	11.78	NM	827.98	816.20
MW-0516-S1	12/5/2006	10.11	NM	827.98	817.87
MW-0516-S1	3/8/2007	11.59	32.66	827.98	816.39
MW-0516-S1	1/16/2008	12.35	32.40	827.98	815.63
MW-0516-S1	11/11/2008	15.74	32.60	827.98	812.24
MW-0516-S1	2/17/2009	14.00	NM	827.98	813.98
MW-0516-S1	6/12/2009	12.52	NM	827.98	815.46
MW-0516-S1	4/13/2010	12.24	32.70	827.98	815.74
MW-0516-S1	9/5/2010	14.96	32.65	827.98	813.02
MW-0516-S1	4/20/2011	11.31	32.60	827.98	816.67
MW-0516-S1	9/27/2011	12.92	32.84	827.98	815.06
MW-0516-S1	3/29/2012	12.59	32.80	827.98	815.39
MW-0516-S1	10/9/2012	15.16	32.60	827.98	812.82
MW-0516-S1	3/12/2013	13.33	32.60	827.98	814.65
MW-0516-S1	9/24/2013	14.08	32.79	827.98	813.90
MW-0516-S1	4/22/2014	12.74	32.80	827.98	815.24
MW-0516-S1	9/3/2014	14.46	32.84	827.98	813.52
MW-0516-S1	3/10/2015	13.40	32.80	827.98	814.58
MW-0516-S1	9/8/2015	13.55	32.78	827.98	814.43
MW-0516-S1	3/10/2016	12.94	32.78	827.98	815.04
MW-0516-S1	9/7/2016	13.71	32.71	828.98	815.27
MW-0516-S1	11/16/2016	13.98	NM	828.98	815.00
MW-0516-S1	3/3/2017	12.58	32.80	827.37	814.79
MW-0516-S1	9/6/2017	13.03	32.74	827.37	814.34
MW-0516-S1	3/6/2018	11.58	32.82	827.37	815.79
MW-0516-S1	9/12/2018	11.41	32.70	827.37	815.96
MW-0516-S1	3/4/2019	12.13	32.70	827.37	815.24
MW-0516-S1	9/6/2019	13.70	33.69	827.37	813.67

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0516-S1	3/4/2020	12.38	32.72	827.37	814.99
MW-0516-S1	3/5/2021	13.84	32.64	827.37	813.53
MW-0516-S1	10/8/2021	13.32	32.64	827.37	814.05
MW-0516-S1	3/1/2022	11.55	32.63	827.37	815.82
MW-0516-S2	10/20/2005	14.37	68.38	827.97	813.60
MW-0516-S2	10/25/2005	14.38	68.38	827.97	813.59
MW-0516-S2	3/23/2006	11.46	68.05	827.97	816.51
MW-0516-S2	3/31/2006	10.61	68.05	827.97	817.36
MW-0516-S2	4/28/2006	11.55	NM	827.97	816.42
MW-0516-S2	12/5/2006	10.55	NM	827.97	817.42
MW-0516-S2	3/8/2007	11.40	68.11	827.97	816.57
MW-0516-S2	1/16/2008	14.11	68.26	827.97	813.86
MW-0516-S2	11/11/2008	19.99	68.05	827.97	807.98
MW-0516-S2	2/17/2009	16.58	NM	827.97	811.39
MW-0516-S2	6/12/2009	14.71	NM	827.97	813.26
MW-0516-S2	4/13/2010	13.72	68.18	827.97	814.25
MW-0516-S2	4/20/2011	14.02	68.10	827.97	813.95
MW-0516-S2	3/12/2013	14.38	68.10	827.97	813.59
MW-0516-S2	9/24/2013	17.03	68.26	827.97	810.94
MW-0516-S2	4/22/2014	14.92	69.09	827.97	813.05
MW-0516-S2	9/3/2014	18.61	69.48	827.97	809.36
MW-0516-S2	3/10/2015	16.16	NM	827.97	811.81
MW-0516-S2	9/8/2015	14.52	69.38	827.97	813.45
MW-0516-S2	3/10/2016	14.58	68.79	827.97	813.39
MW-0516-S2	9/7/2016	17.16	68.32	828.97	811.81
MW-0516-S2	11/16/2016	15.78	NM	828.97	813.19
MW-0516-S2	3/3/2017	13.31	68.35	827.34	814.03
MW-0516-S2	9/6/2017	15.46	68.27	827.34	811.88
MW-0516-S2	3/6/2018	12.51	69.05	827.34	814.83
MW-0516-S2	9/12/2018	12.80	68.24	827.34	814.54
MW-0516-S2	3/4/2019	13.29	58.28	827.34	814.05
MW-0516-S2	9/6/2019	17.30	68.20	827.34	810.04
MW-0516-S2	3/4/2020	12.03	68.32	827.34	815.31
MW-0516-S2	3/5/2021	16.92	68.32	827.34	810.42
MW-0516-S2	10/8/2021	17.55	68.27	827.34	809.79
MW-0516-S2	3/1/2022	40.33	68.26	827.34	787.01
MW-0517-S1	9/20/2005	12.44	30.72	826.47	814.03
MW-0517-S1	10/18/2005	12.17	30.85	826.47	814.30
MW-0517-S1	10/25/2005	12.17	30.85	826.47	814.30
MW-0517-S1	3/22/2006	10.70	30.63	826.47	815.77
MW-0517-S1	3/31/2006	9.91	30.63	826.47	816.56
MW-0517-S1	4/28/2006	10.64	NM	826.47	815.83
MW-0517-S1	12/5/2006	9.48	NM	826.47	816.99

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0517-S1	3/8/2007	10.42	30.51	826.47	816.05
MW-0517-S1	1/16/2008	11.23	30.70	826.47	815.24
MW-0517-S1	11/11/2008	14.47	30.60	826.47	812.00
MW-0517-S1	2/17/2009	12.65	NM	826.47	813.82
MW-0517-S1	6/12/2009	11.34	NM	826.47	815.13
MW-0517-S1	10/9/2012	13.88	30.62	826.47	812.59
MW-0517-S1	3/12/2013	11.98	30.62	826.47	814.49
MW-0517-S1	9/24/2013	12.87	30.75	826.47	813.60
MW-0517-S1	4/22/2014	11.65	30.76	826.47	814.82
MW-0517-S1	9/3/2014	13.20	30.32	826.47	813.27
MW-0517-S1	3/10/2015	12.17	30.07	826.47	814.30
MW-0517-S1	9/8/2015	12.27	29.78	826.47	814.20
MW-0517-S1	3/10/2016	11.77	29.86	826.47	814.70
MW-0517-S1	9/7/2016	12.51	29.76	827.47	814.96
MW-0517-S1	11/16/2016	12.76	NM	827.47	814.71
MW-0517-S1	3/3/2017	11.36	29.31	825.82	814.46
MW-0517-S1	9/6/2017	11.85	29.39	825.82	813.97
MW-0517-S1	3/6/2018	10.38	29.42	825.82	815.44
MW-0517-S1	9/12/2018	10.32	29.32	825.82	815.50
MW-0517-S1	3/4/2019	10.95	29.28	825.82	814.87
MW-0517-S1	9/6/2019	12.48	29.20	825.82	813.34
MW-0517-S1	3/4/2020	11.10	29.10	825.82	814.72
MW-0517-S1	3/5/2021	12.50	29.22	825.82	813.32
MW-0517-S1	10/8/2021	12.15	29.22	825.82	813.67
MW-0517-S1	3/1/2022	10.38	29.20	825.82	815.44
MW-0517-I2	10/18/2005	13.02	40.13	826.56	813.54
MW-0517-I2	10/25/2005	12.45	40.13	826.56	814.11
MW-0517-I2	3/22/2006	10.25	39.89	826.56	816.31
MW-0517-I2	3/31/2006	9.45	39.89	826.56	817.11
MW-0517-I2	4/28/2006	10.73	NM	826.56	815.83
MW-0517-I2	12/5/2006	10.10	NM	826.56	816.46
MW-0517-I2	3/8/2007	10.61	39.90	826.56	815.95
MW-0517-I2	1/16/2008	12.55	40.05	826.56	814.01
MW-0517-I2	11/11/2008	15.14	39.96	826.56	811.42
MW-0517-I2	2/17/2009	13.32	NM	826.56	813.24
MW-0602-B1	3/24/2006	9.12	86.17	825.36	816.24
MW-0602-B1	3/31/2006	8.32	86.17	825.36	817.04
MW-0602-B1	4/28/2006	9.16	NM	825.36	816.20
MW-0602-B1	12/5/2006	7.78	NM	825.36	817.58
MW-0602-B1	3/8/2007	9.03	86.21	825.36	816.33
MW-0602-B1	1/16/2008	11.55	86.25	825.36	813.81
MW-0602-B1	11/11/2008	17.37	86.27	825.36	807.99
MW-0602-B1	2/17/2009	13.94	NM	825.36	811.42

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0602-B1	6/12/2009	12.16	NM	825.36	813.20
MW-0602-B1	4/13/2010	11.04	86.31	825.36	814.32
MW-0602-B1	9/5/2010	16.11	86.90	825.36	809.25
MW-0602-B1	4/20/2011	11.61	86.19	825.36	813.75
MW-0602-B1	9/27/2011	13.80	86.45	825.36	811.56
MW-0602-B1	9/4/2015	Abandoned Well			
MW-0602-S1	3/24/2006	11.70	28.31	825.30	813.60
MW-0602-S1	3/31/2006	10.93	28.31	825.30	814.37
MW-0602-S1	4/28/2006	10.90	NM	825.30	814.40
MW-0602-S1	12/5/2006	9.94	NM	825.30	815.36
MW-0602-S1	3/8/2007	10.68	27.20	825.30	814.62
MW-0602-S1	1/16/2008	11.10	27.41	825.30	814.20
MW-0602-S1	11/11/2008	13.93	27.11	825.30	811.37
MW-0602-S1	2/17/2009	12.20	NM	825.30	813.10
MW-0602-S1	6/12/2009	11.71	NM	825.30	813.59
MW-0602-S1	4/13/2010	11.36	27.31	825.30	813.94
MW-0602-S1	9/5/2010	12.79	27.24	825.30	812.51
MW-0602-S1	4/20/2011	11.01	27.07	825.30	814.29
MW-0602-S1	9/27/2011	11.65	27.39	825.30	813.65
MW-0602-S1	3/29/2012	11.30	27.20	825.30	814.00
MW-0602-S1	10/9/2012	12.64	27.00	825.30	812.66
MW-0602-S1	3/12/2013	11.62	27.00	825.30	813.68
MW-0602-S1	9/24/2013	12.64	27.20	825.30	812.66
MW-0602-S1	4/22/2014	11.52	24.09	825.30	813.78
MW-0602-S1	9/3/2014	12.79	27.06	825.30	812.51
MW-0602-S1	3/10/2015	12.04	26.96	825.30	813.26
MW-0602-S1	9/8/2015	NM	NM	825.30	NM
MW-0602-S1	3/10/2016	12.01	27.03	825.30	813.29
MW-0602-S1	9/7/2016	12.02	26.90	826.30	814.28
MW-0602-S1	11/16/2016	13.22	NM	826.30	813.08
MW-0602-S1	3/3/2017	11.37	26.63	824.68	813.31
MW-0602-S1	9/6/2017	11.89	26.81	824.68	812.79
MW-0602-S1	3/6/2018	10.67	26.92	824.68	814.01
MW-0602-S1	9/12/2018	10.54	26.78	824.68	814.14
MW-0602-S1	3/4/2019	11.18	26.71	824.68	813.50
MW-0602-S1	9/6/2019	12.41	26.65	824.68	812.27
MW-0602-S1	3/4/2020	9.45	26.76	824.68	815.23
MW-0602-S1	3/5/2021	12.18	26.60	824.68	812.50
MW-0602-S1	10/8/2021	11.86	26.50	824.68	812.82
MW-0602-S1	3/1/2022	10.70	26.49	824.68	813.98
MW-0603-B1	3/24/2006	9.70	83.40	826.20	816.50
MW-0603-B1	3/31/2006	8.92	83.40	826.20	817.28
MW-0603-B1	4/28/2006	9.76	NM	826.20	816.44

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0603-B1	12/5/2006	8.35	NM	826.20	817.85
MW-0603-B1	3/8/2007	9.64	83.32	826.20	816.56
MW-0603-B1	1/16/2008	12.13	83.48	826.20	814.07
MW-0603-B1	11/11/2008	18.04	83.24	826.20	808.16
MW-0603-B1	2/17/2009	14.69	NM	826.20	811.51
MW-0603-B1	6/12/2009	12.86	NM	826.20	813.34
MW-0603-B1	4/13/2010	11.82	83.38	826.20	814.38
MW-0603-B1	9/5/2010	16.78	83.35	826.20	809.42
MW-0603-B1	4/20/2011	12.27	83.22	826.20	813.93
MW-0603-B1	9/27/2011	14.47	83.55	826.20	811.73
MW-0603-B1	3/10/2016	12.70	83.37	826.20	813.50
MW-0603-S1	3/24/2006	10.79	24.38	826.09	815.30
MW-0603-S1	3/31/2006	10.02	24.38	826.09	816.07
MW-0603-S1	4/28/2006	10.71	NM	826.09	815.38
MW-0603-S1	12/5/2006	9.59	NM	826.09	816.50
MW-0603-S1	3/8/2007	10.46	24.12	826.09	815.63
MW-0603-S1	1/16/2008	11.06	24.33	826.09	815.03
MW-0603-S1	11/11/2008	14.15	24.15	826.09	811.94
MW-0603-S1	2/17/2009	12.35	NM	826.09	813.74
MW-0603-S1	6/12/2009	11.25	NM	826.09	814.84
MW-0603-S1	4/13/2010	11.06	24.31	826.09	815.03
MW-0603-S1	9/5/2010	13.46	24.20	826.09	812.63
MW-0603-S1	4/20/2011	10.44	24.10	826.09	815.65
MW-0603-S1	9/27/2011	11.53	24.22	826.09	814.56
MW-0603-S1	3/29/2012	11.33	24.15	826.09	814.76
MW-0603-S1	10/9/2012	13.55	24.00	826.09	812.54
MW-0603-S1	3/12/2013	11.85	24.00	826.09	814.24
MW-0603-S1	9/24/2013	12.65	24.18	826.09	813.44
MW-0603-S1	4/22/2014	11.52	24.09	826.09	814.57
MW-0603-S1	9/3/2014	12.91	24.78	826.09	813.18
MW-0603-S1	3/10/2015	11.96	24.05	826.09	814.13
MW-0603-S1	9/8/2015	12.14	24.07	826.09	813.95
MW-0603-S1	3/10/2016	11.64	24.04	826.09	814.45
MW-0603-S1	9/7/2016	12.27	24.10	826.09	813.82
MW-0603-S1	11/16/2016	12.76	NM	826.09	813.33
MW-0603-S1	3/3/2017	11.29	24.13	825.36	814.07
MW-0603-S1	9/6/2017	11.70	23.99	825.36	813.66
MW-0603-S1	3/6/2018	10.40	24.23	825.36	814.96
MW-0603-S1	9/12/2018	10.29	24.04	825.36	815.07
MW-0603-S1	3/4/2019	10.93	24.04	825.36	814.43
MW-0603-S1	9/6/2019	12.35	24.01	825.36	813.01
MW-0603-S1	3/4/2020	11.03	24.00	825.36	814.33
MW-0603-S1	3/5/2021	12.24	23.91	825.36	813.12

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0603-S1	10/8/2021	11.85	23.87	825.36	813.51
MW-0603-S1	3/1/2022	10.40	23.51	825.36	814.96
MW-0603-S2	3/24/2006	10.82	69.25	826.10	815.28
MW-0603-S2	3/31/2006	9.97	69.25	826.10	816.13
MW-0603-S2	4/28/2006	9.89	NM	826.10	816.21
MW-0603-S2	12/5/2006	8.46	NM	826.10	817.64
MW-0603-S2	3/8/2007	9.78	69.27	826.10	816.32
MW-0603-S2	1/16/2008	12.35	69.41	826.10	813.75
MW-0603-S2	11/11/2008	18.17	69.21	826.10	807.93
MW-0603-S2	2/17/2009	14.83	NM	826.10	811.27
MW-0603-S2	6/12/2009	12.98	NM	826.10	813.12
MW-0603-S2	4/13/2010	11.96	69.35	826.10	814.14
MW-0603-S2	9/5/2010	16.72	69.25	826.10	809.38
MW-0603-S2	4/20/2011	12.19	69.04	826.10	813.91
MW-0603-S2	9/27/2011	14.39	69.35	826.10	811.71
MW-0603-S2	3/29/2012	12.07	69.28	826.10	814.03
MW-0603-S2	10/9/2012	17.45	69.15	826.10	808.65
MW-0603-S2	3/12/2013	12.45	69.15	826.10	813.65
MW-0603-S2	9/24/2013	15.09	69.29	826.10	811.01
MW-0603-S2	4/22/2014	13.02	70.65	826.10	813.08
MW-0603-S2	9/3/2014	16.67	83.45	826.10	809.43
MW-0603-S2	3/10/2015	11.96	84.05	826.10	814.14
MW-0603-S2	9/8/2015	12.83	84.50	826.10	813.27
MW-0603-S2	9/3/2015	Abandoned Well			
MW-0604-S1	3/22/2006	10.65	29.41	826.28	815.63
MW-0604-S1	3/31/2006	9.87	29.41	826.28	816.41
MW-0604-S1	4/28/2006	10.59	NM	826.28	815.69
MW-0604-S1	12/5/2006	9.45	NM	826.28	816.83
MW-0604-S1	3/8/2007	10.37	28.81	826.28	815.91
MW-0604-S1	1/16/2008	11.15	28.95	826.28	815.13
MW-0604-S1	11/11/2008	14.27	28.73	826.28	812.01
MW-0604-S1	2/17/2009	12.51	NM	826.28	813.77
MW-0604-S1	6/12/2009	11.26	NM	826.28	815.02
MW-0604-S1	10/9/2012	13.73	28.78	826.28	812.55
MW-0604-S1	3/12/2013	11.87	28.78	826.28	814.41
MW-0604-S1	9/24/2013	12.74	28.91	826.28	813.54
MW-0604-S1	4/22/2014	11.59	28.98	826.28	814.69
MW-0604-S1	9/3/2014	13.09	28.41	826.28	813.19
MW-0604-S1	3/10/2015	12.06	28.58	826.28	814.22
MW-0604-S1	9/8/2015	12.13	27.94	826.28	814.15
MW-0604-S1	3/10/2016	11.66	28.18	826.28	814.62
MW-0604-S1	9/7/2016	12.40	28.24	826.28	813.88
MW-0604-S1	11/16/2016	12.64	NM	826.28	813.64

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0604-S1	3/3/2017	11.29	27.70	825.62	814.33
MW-0604-S1	9/6/2017	11.72	27.79	825.62	813.90
MW-0604-S1	3/6/2018	10.31	27.87	825.62	815.31
MW-0604-S1	9/12/2018	10.25	27.83	825.62	815.37
MW-0604-S1	3/4/2019	10.90	27.80	825.62	814.72
MW-0604-S1	9/6/2019	12.38	27.75	825.62	813.24
MW-0604-S1	3/4/2020	11.02	27.80	825.62	814.60
MW-0604-S1	3/5/2021	12.36	27.80	825.62	813.26
MW-0604-S1	10/8/2021	12.00	27.62	825.62	813.62
MW-0604-S1	3/1/2022	10.30	27.65	825.62	815.32
MW-0604-S2	3/22/2006	10.02	61.06	826.44	816.42
MW-0604-S2	3/31/2006	9.27	61.06	826.44	817.17
MW-0604-S2	4/28/2006	10.13	NM	826.44	816.31
MW-0604-S2	12/5/2006	8.70	NM	826.44	817.74
MW-0604-S2	3/8/2007	9.93	61.12	826.44	816.51
MW-0604-S2	1/16/2008	12.51	61.21	826.44	813.93
MW-0604-S2	11/11/2008	18.45	61.05	826.44	807.99
MW-0604-S2	2/17/2009	15.02	NM	826.44	811.42
MW-0604-S2	6/12/2009	13.17	NM	826.44	813.27
MW-0604-S2	4/13/2010	12.17	61.10	826.44	814.27
MW-0604-S2	9/5/2010	17.17	61.55	826.44	809.27
MW-0604-S2	4/20/2011	12.63	61.00	826.44	813.81
MW-0604-S2	9/27/2011	14.89	61.32	826.44	811.55
MW-0604-S2	3/29/2012	12.41	61.23	826.44	814.03
MW-0604-S2	10/9/2012	17.88	61.14	826.44	808.56
MW-0604-S2	3/12/2013	13.01	61.14	826.44	813.43
MW-0604-S2	9/24/2013	15.49	61.22	826.44	810.95
MW-0604-S2	4/22/2014	13.49	61.26	826.44	812.95
MW-0604-S2	9/3/2014	17.02	61.20	826.44	809.42
MW-0604-S2	3/10/2015	14.59	NM	826.44	811.85
MW-0604-S2	9/8/2015	12.97	61.11	826.44	813.47
MW-0604-S2	3/10/2016	12.98	NM	826.44	813.46
MW-0604-S2	9/7/2016	15.49	61.24	826.44	810.95
MW-0604-S2	11/16/2016	14.30	NM	826.44	812.14
MW-0604-S2	3/3/2017	11.91	61.05	825.86	813.95
MW-0604-S2	9/6/2017	13.91	61.09	825.86	811.95
MW-0604-S2	3/6/2018	10.91	61.23	825.86	814.95
MW-0604-S2	9/12/2018	11.37	61.23	825.86	814.49
MW-0604-S2	3/4/2019	11.75	61.20	825.86	814.11
MW-0604-S2	9/6/2019	15.70	61.25	825.86	810.16
MW-0604-S2	3/4/2020	10.57	61.27	825.86	815.29
MW-0604-S2	3/5/2021	15.40	61.20	825.86	810.46
MW-0604-S2	10/8/2021	15.87	61.10	825.86	809.99

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0604-S2	3/1/2022	20.80	61.20	825.86	805.06
MW-0605-B1	3/22/2006	10.79	89.55	827.44	816.65
MW-0605-B1	3/31/2006	9.99	89.55	827.44	817.45
MW-0605-B1	4/28/2006	10.95	NM	827.44	816.49
MW-0605-B1	12/5/2006	9.49	NM	827.44	817.95
MW-0605-B1	3/8/2007	10.77	89.53	827.44	816.67
MW-0605-B1	1/16/2008	13.45	89.65	827.44	813.99
MW-0605-B1	11/11/2008	19.44	89.60	827.44	808.00
MW-0605-B1	2/17/2009	16.04	NM	827.44	811.40
MW-0605-B1	6/12/2009	14.11	NM	827.44	813.33
MW-0605-B1	4/13/2010	13.10	89.85	827.44	814.34
MW-0605-B1	9/5/2010	18.20	89.60	827.44	809.24
MW-0605-B1	4/20/2011	13.61	89.50	827.44	813.83
MW-0605-B1	9/27/2011	15.86	89.75	827.44	811.58
MW-0605-B1	8/24/2015	Abandoned Well			
MW-0605-S1	3/22/2006	11.23	29.83	827.38	816.15
MW-0605-S1	3/31/2006	10.46	29.83	827.38	816.92
MW-0605-S1	4/28/2006	11.19	NM	827.38	816.19
MW-0605-S1	12/5/2006	9.97	NM	827.38	817.41
MW-0605-S1	3/8/2007	10.98	29.64	827.38	816.40
MW-0605-S1	1/16/2008	11.79	29.71	827.38	815.59
MW-0605-S1	11/11/2008	15.14	29.65	827.38	812.24
MW-0605-S1	2/17/2009	13.42	NM	827.38	813.96
MW-0605-S1	6/12/2009	11.91	NM	827.38	815.47
MW-0605-S1	4/13/2010	11.64	29.65	827.38	815.74
MW-0605-S1	9/5/2010	14.37	29.64	827.38	813.01
MW-0605-S1	4/20/2011	11.20	29.50	827.38	816.18
MW-0605-S1	9/27/2011	12.35	29.82	827.38	815.03
MW-0605-S1	3/29/2012	11.90	29.75	827.38	815.48
MW-0605-S1	10/9/2012	14.59	29.50	827.38	812.79
MW-0605-S1	3/12/2013	12.70	29.50	827.38	814.68
MW-0605-S1	9/24/2013	13.55	29.74	827.38	813.83
MW-0605-S1	4/22/2014	12.23	29.71	827.38	815.15
MW-0605-S1	9/3/2014	13.90	30.62	827.38	813.48
MW-0605-S1	3/10/2015	12.83	29.07	827.38	814.55
MW-0605-S1	9/8/2015	12.93	29.00	827.38	814.45
MW-0605-S1	3/10/2016	12.41	29.15	827.38	814.97
MW-0605-S1	9/7/2016	13.18	29.17	827.38	814.20
MW-0605-S1	11/16/2016	13.49	NM	827.38	813.89
MW-0605-S1	3/3/2017	11.99	28.75	826.78	814.79
MW-0605-S1	9/6/2017	12.45	28.88	826.78	814.33
MW-0605-S1	3/6/2018	10.92	28.90	826.78	815.86
MW-0605-S1	9/12/2018	10.85	28.85	826.78	815.93

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0605-S1	3/4/2019	11.53	28.81	826.78	815.25
MW-0605-S1	9/6/2019	13.12	28.90	826.78	813.66
MW-0605-S1	3/4/2020	11.79	28.67	826.78	814.99
MW-0605-S1	3/5/2021	13.27	28.65	826.78	813.51
MW-0605-S1	10/8/2021	12.81	28.58	826.78	813.97
MW-0605-S1	3/1/2022	10.96	28.60	826.78	815.82
MW-0605-S2	3/22/2006	10.87	61.15	827.38	816.51
MW-0605-S2	3/31/2006	10.02	61.15	827.38	817.36
MW-0605-S2	4/28/2006	10.91	NM	827.38	816.47
MW-0605-S2	12/5/2006	9.44	NM	827.38	817.94
MW-0605-S2	3/8/2007	10.72	61.13	827.38	816.66
MW-0605-S2	1/16/2008	13.36	61.26	827.38	814.02
MW-0605-S2	11/11/2008	19.36	61.12	827.38	808.02
MW-0605-S2	2/17/2009	15.97	NM	827.38	811.41
MW-0605-S2	6/12/2009	14.06	NM	827.38	813.32
MW-0605-S2	4/13/2010	13.05	61.18	827.38	814.33
MW-0605-S2	9/5/2010	18.12	61.20	827.38	809.26
MW-0605-S2	4/20/2011	13.55	61.11	827.38	813.83
MW-0605-S2	9/27/2011	15.82	61.35	827.38	811.56
MW-0605-S2	3/29/2012	13.25	61.28	827.38	814.13
MW-0605-S2	10/9/2012	18.86	61.21	827.38	808.52
MW-0605-S2	3/12/2013	14.06	61.21	827.38	813.32
MW-0605-S2	9/24/2013	16.42	61.25	827.38	810.96
MW-0605-S2	4/22/2014	14.38	62.10	827.38	813.00
MW-0605-S2	9/3/2014	18.09	62.32	827.38	809.29
MW-0605-S2	3/10/2015	NM	NM	827.38	NM
MW-0605-S2	9/8/2015	14.02	61.18	827.38	813.36
MW-0605-S2	3/10/2016	13.91	NM	827.38	813.47
MW-0605-S2	9/7/2016	16.51	61.33	827.38	810.87
MW-0605-S2	11/16/2016	15.18	NM	827.38	812.20
MW-0605-S2	3/3/2017	12.72	61.09	826.76	814.04
MW-0605-S2	9/6/2017	14.86	61.25	826.76	811.90
MW-0605-S2	3/6/2018	11.91	61.31	826.76	814.85
MW-0605-S2	9/12/2018	12.22	61.30	826.76	814.54
MW-0605-S2	3/4/2019	12.63	61.28	826.76	814.13
MW-0605-S2	9/6/2019	16.60	61.32	826.76	810.16
MW-0605-S2	3/4/2020	11.38	61.35	826.76	815.38
MW-0605-S2	3/5/2021	16.35	61.30	826.76	810.41
MW-0605-S2	10/8/2021	17.00	61.22	826.76	809.76
MW-0605-S2	3/1/2022	12.71	61.25	826.76	814.05
MW-0606-S1	3/23/2006	8.80	31.65	824.10	815.30
MW-0606-S1	3/31/2006	8.03	31.65	824.10	816.07
MW-0606-S1	4/28/2006	8.71	NM	824.10	815.39

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0606-S1	12/5/2006	7.67	NM	824.10	816.43
MW-0606-S1	3/8/2007	8.54	31.52	824.10	815.56
MW-0606-S1	11/11/2008	12.36	31.40	824.10	811.74
MW-0606-S1	2/17/2009	10.43	NM	824.10	813.67
MW-0606-S1	6/12/2009	8.38	NM	824.10	815.72
MW-0606-S1	4/13/2010	9.20	31.42	824.10	814.90
MW-0606-S1	10/9/2012	11.72	31.26	824.10	812.38
MW-0606-S1	3/12/2013	9.89	31.26	824.10	814.21
MW-0606-S1	9/24/2013	10.51	31.34	824.10	813.59
MW-0606-S1	4/22/2014	9.71	31.27	824.10	814.39
MW-0606-S1	9/3/2014	11.11	31.25	824.10	812.99
MW-0606-S1	3/10/2015	10.08	30.91	824.10	814.02
MW-0606-S1	9/8/2015	10.27	29.81	824.10	813.83
MW-0606-S1	3/10/2016	9.69	30.82	824.10	814.41
MW-0606-S1	9/7/2016	10.47	30.73	824.10	813.63
MW-0606-S1	11/16/2016	11.04	NM	824.10	813.06
MW-0606-S1	3/3/2017	9.39	30.71	823.45	814.06
MW-0606-S1	9/6/2017	9.02	30.61	823.45	814.43
MW-0606-S1	3/9/2018	8.51	30.93	823.45	814.94
MW-0606-S1	9/12/2018	8.42	30.68	823.45	815.03
MW-0606-S1	9/6/2019	10.51	30.60	823.45	812.94
MW-0606-S1	3/4/2020	9.05	30.64	823.45	814.40
MW-0606-S1	3/5/2021	10.36	30.51	823.45	813.09
MW-0606-S1	10/8/2021	10.05	30.52	823.45	813.40
MW-0606-S1	3/1/2022	8.51	30.49	823.45	814.94
MW-0606-S2	3/23/2006	7.68	58.83	823.97	816.29
MW-0606-S2	3/31/2006	6.93	58.83	823.97	817.04
MW-0606-S2	4/28/2006	8.72	NM	823.97	815.25
MW-0606-S2	12/5/2006	6.35	NM	823.97	817.62
MW-0606-S2	3/8/2007	7.61	58.67	823.97	816.36
MW-0606-S2	11/11/2008	15.92	58.70	823.97	808.05
MW-0606-S2	2/17/2009	12.51	NM	823.97	811.46
MW-0606-S2	6/12/2009	10.68	NM	823.97	813.29
MW-0606-S2	9/5/2010	14.62	59.00	823.97	809.35
MW-0606-S2	4/20/2011	10.15	58.63	823.97	813.82
MW-0606-S2	9/27/2011	12.38	58.90	823.97	811.59
MW-0606-S2	3/29/2012	10.00	58.80	823.97	813.97
MW-0606-S2	10/9/2012	15.34	58.69	823.97	808.63
MW-0606-S2	3/12/2013	10.47	58.69	823.97	813.50
MW-0606-S2	9/24/2013	13.00	58.85	823.97	810.97
MW-0606-S2	4/22/2014	11.06	58.84	823.97	812.91
MW-0606-S2	9/3/2014	14.46	58.82	823.97	809.51
MW-0606-S2	3/10/2015	12.10	NM	823.97	811.87

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0606-S2	9/8/2015	10.65	59.35	823.97	813.32
MW-0606-S2	3/10/2016	10.53	58.83	823.97	813.44
MW-0606-S2	9/7/2016	NM	NM	823.97	NM
MW-0606-S2	11/16/2016	10.01	NM	823.97	813.96
MW-0606-S2	3/3/2017	9.48	58.84	823.39	813.91
MW-0606-S2	9/6/2017	11.38	58.70	823.39	812.01
MW-0606-S2	3/6/2018	8.49	59.25	823.39	814.90
MW-0606-S2	9/12/2018	8.90	58.78	823.39	814.49
MW-0606-S2	9/6/2019	13.10	58.81	823.39	810.29
MW-0606-S2	3/4/2020	8.21	58.75	823.39	815.18
MW-0606-S2	3/5/2021	12.89	58.81	823.39	810.50
MW-0606-S2	10/8/2021	13.41	58.68	823.39	809.98
MW-0606-S2	3/1/2022	9.38	58.69	823.39	814.01
MW-0607-B1	1/16/2008	8.40	77.51	822.77	814.37
MW-0607-B1	11/11/2008	13.99	77.42	822.77	808.78
MW-0607-B1	2/17/2009	10.63	NM	822.77	812.14
MW-0607-B1	6/12/2009	8.95	NM	822.77	813.82
MW-0607-B1	4/13/2010	8.02	77.46	822.77	814.75
MW-0607-B1	9/5/2010	12.50	78.00	822.77	810.27
MW-0607-B1	4/20/2011	8.41	77.44	822.77	814.36
MW-0607-B1	9/27/2011	10.60	77.62	822.77	812.17
MW-0607-B1	9/3/2015	Abandoned Well			
MW-0607-S1	3/24/2006	8.55	26.85	822.65	814.10
MW-0607-S1	3/31/2006	7.78	26.85	822.65	814.87
MW-0607-S1	4/28/2006	8.52	NM	822.65	814.13
MW-0607-S1	12/5/2006	7.68	NM	822.65	814.97
MW-0607-S1	3/8/2007	8.33	26.55	822.65	814.32
MW-0607-S1	1/16/2008	8.88	26.68	822.65	813.77
MW-0607-S1	11/11/2008	11.61	26.50	822.65	811.04
MW-0607-S1	2/17/2009	9.72	NM	822.65	812.93
MW-0607-S1	6/12/2009	9.12	NM	822.65	813.53
MW-0607-S1	4/13/2010	9.00	26.50	822.65	813.65
MW-0607-S1	9/5/2010	10.98	26.50	822.65	811.67
MW-0607-S1	4/20/2011	8.49	26.42	822.65	814.16
MW-0607-S1	9/27/2011	9.31	26.40	822.65	813.34
MW-0607-S1	3/29/2012	9.26	26.27	822.65	813.39
MW-0607-S1	10/9/2012	11.05	26.00	822.65	811.60
MW-0607-S1	3/12/2013	9.40	26.00	822.65	813.25
MW-0607-S1	9/24/2013	10.30	26.25	822.65	812.35
MW-0607-S1	4/22/2014	9.53	26.16	822.65	813.12
MW-0607-S1	9/3/2014	10.53	26.23	822.65	812.12
MW-0607-S1	3/10/2015	9.69	26.27	822.65	812.96
MW-0607-S1	9/8/2015	9.82	26.17	822.65	812.83
MW-0607-S1	3/10/2016	9.29	29.14	822.65	813.36
MW-0607-S1	9/7/2016	9.96	26.13	822.65	812.69

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0607-S1	11/16/2016	10.98	NM	822.65	811.67
MW-0607-S1	3/3/2017	90.80	26.12	821.93	731.13
MW-0607-S1	9/6/2017	8.51	26.06	821.93	813.42
MW-0607-S1	3/6/2018	8.54	26.25	821.93	813.39
MW-0607-S1	9/12/2018	8.42	26.01	821.93	813.51
MW-0607-S1	3/4/2019	8.90	26.03	821.93	813.03
MW-0607-S1	9/6/2019	10.02	26.03	821.93	811.91
MW-0607-S1	3/4/2020	8.69	26.10	821.93	813.24
MW-0607-S1	3/5/2021	9.73	26.05	821.93	812.20
MW-0607-S1	10/8/2021	9.57	26.04	821.93	812.36
MW-0607-S1	3/1/2022	8.35	26.00	821.93	813.58
MW-0607-S2	3/8/2007	7.00	50.51	823.06	816.06
MW-0607-S2	1/16/2008	9.27	50.65	823.06	813.79
MW-0607-S2	11/11/2008	14.91	50.57	823.06	808.15
MW-0607-S2	2/17/2009	11.53	NM	823.06	811.53
MW-0607-S2	6/12/2009	9.83	NM	823.06	813.23
MW-0607-S2	4/13/2010	8.78	50.58	823.06	814.28
MW-0607-S2	9/5/2010	13.63	57.05	823.06	809.43
MW-0607-S2	4/20/2011	9.15	50.47	823.06	813.91
MW-0607-S2	9/27/2011	11.47	50.72	823.06	811.59
MW-0607-S2	3/29/2012	9.21	50.68	823.06	813.85
MW-0607-S2	10/9/2012	14.27	50.66	823.06	808.79
MW-0607-S2	3/12/2013	9.56	50.66	823.06	813.50
MW-0607-S2	9/24/2013	12.10	50.74	823.06	810.96
MW-0607-S2	4/22/2014	10.16	50.68	823.06	812.90
MW-0607-S2	9/3/2014	13.42	50.66	823.06	809.64
MW-0607-S2	3/10/2015	11.22	NM	823.06	811.84
MW-0607-S2	9/8/2015	9.91	46.85	823.06	813.15
MW-0607-S2	3/10/2016	9.77	50.69	823.06	813.29
MW-0607-S2	9/7/2016	12.05	50.89	823.06	811.01
MW-0607-S2	11/16/2016	11.03	NM	823.06	812.03
MW-0607-S2	3/3/2017	8.78	50.73	822.35	813.57
MW-0607-S2	9/6/2017	10.41	50.66	822.35	811.94
MW-0607-S2	3/6/2018	7.69	50.75	822.35	814.66
MW-0607-S2	9/12/2018	8.05	50.65	822.35	814.30
MW-0607-S2	3/4/2019	8.50	50.68	822.35	813.85
MW-0607-S2	9/6/2019	12.14	50.68	822.35	810.21
MW-0607-S2	3/4/2020	7.51	50.76	822.35	814.84
MW-0607-S2	3/5/2021	11.83	50.72	822.35	810.52
MW-0607-S2	10/8/2021	12.41	50.69	822.35	809.94
MW-0607-S2	3/1/2022	8.55	50.65	822.35	813.80
MW-0608-B1	3/23/2006	9.84	91.07	825.97	816.13
MW-0608-B1	3/31/2006	9.05	91.07	825.97	816.92
MW-0608-B1	4/28/2006	9.79	NM	825.97	816.18
MW-0608-B1	12/5/2006	8.51	NM	825.97	817.46

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0608-B1	3/8/2007	9.72	89.59	825.97	816.25
MW-0608-B1	1/16/2008	12.18	89.67	825.97	813.79
MW-0608-B1	11/11/2008	17.90	89.65	825.97	808.07
MW-0608-B1	2/17/2009	14.49	NM	825.97	811.48
MW-0608-B1	6/12/2009	12.72	NM	825.97	813.25
MW-0608-B1	4/13/2010	11.69	83.99	825.97	814.28
MW-0608-B1	9/5/2010	16.58	90.08	825.97	809.39
MW-0608-B1	4/20/2011	12.25	89.52	825.97	813.72
MW-0608-B1	9/27/2011	14.36	89.75	825.97	811.61
MW-0608-B1	9/3/2015	Abandoned Well			
MW-0608-S1	3/23/2006	11.74	30.81	825.97	814.23
MW-0608-S1	3/31/2006	10.97	30.81	825.97	815.00
MW-0608-S1	4/28/2006	11.66	NM	825.97	814.31
MW-0608-S1	12/5/2006	10.73	NM	825.97	815.24
MW-0608-S1	3/8/2007	11.43	30.38	825.97	814.54
MW-0608-S1	1/16/2008	11.94	30.45	825.97	814.03
MW-0608-S1	11/11/2008	14.67	30.20	825.97	811.30
MW-0608-S1	2/17/2009	12.93	NM	825.97	813.04
MW-0608-S1	6/12/2009	12.27	NM	825.97	813.70
MW-0608-S1	4/13/2010	12.13	30.11	825.97	813.84
MW-0608-S1	9/5/2010	14.08	29.96	825.97	811.89
MW-0608-S1	4/20/2011	11.50	29.90	825.97	814.47
MW-0608-S1	9/27/2011	12.38	30.00	825.97	813.59
MW-0608-S1	3/29/2012	12.19	30.02	825.97	813.78
MW-0608-S1	10/9/2012	14.10	29.60	825.97	811.87
MW-0608-S1	3/12/2013	12.42	29.60	825.97	813.55
MW-0608-S1	9/24/2013	13.35	29.40	825.97	812.62
MW-0608-S1	4/22/2014	12.47	29.26	825.97	813.50
MW-0608-S1	9/3/2014	13.58	28.94	825.97	812.39
MW-0608-S1	3/10/2015	12.70	28.73	825.97	813.27
MW-0608-S1	9/8/2015	12.93	28.58	825.97	813.04
MW-0608-S1	3/10/2016	12.38	28.62	825.97	813.59
MW-0608-S1	9/7/2016	13.04	28.37	825.97	812.93
MW-0608-S1	11/16/2016	13.17	NM	825.97	812.80
MW-0608-S1	3/3/2017	12.14	28.29	825.26	813.12
MW-0608-S1	9/6/2017	12.59	28.23	825.26	812.67
MW-0608-S1	3/6/2018	11.47	28.53	825.26	813.79
MW-0608-S1	9/12/2018	11.34	28.22	825.26	813.92
MW-0608-S1	3/4/2019	11.85	28.19	825.26	813.41
MW-0608-S1	9/6/2019	13.02	28.13	825.26	812.24
MW-0608-S1	3/4/2020	11.76	28.20	825.26	813.50
MW-0608-S1	3/5/2021	12.80	27.99	825.26	812.46
MW-0608-S1	10/8/2021	12.59	29.98	825.26	812.67
MW-0608-S1	3/1/2022	11.30	27.95	825.26	813.96
MW-0608-S2	3/23/2006	9.71	67.75	825.97	816.26

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0608-S2	3/31/2006	8.86	67.75	825.97	817.11
MW-0608-S2	4/28/2006	9.76	NM	825.97	816.21
MW-0608-S2	12/5/2006	8.43	NM	825.97	817.54
MW-0608-S2	3/8/2007	9.70	67.76	825.97	816.27
MW-0608-S2	1/16/2008	12.10	68.91	825.97	813.87
MW-0608-S2	11/11/2008	17.84	67.80	825.97	808.13
MW-0608-S2	2/17/2009	14.45	NM	825.97	811.52
MW-0608-S2	6/12/2009	12.68	NM	825.97	813.29
MW-0608-S2	4/13/2010	11.59	67.85	825.97	814.38
MW-0608-S2	9/5/2010	16.55	68.25	825.97	809.42
MW-0608-S2	4/20/2011	12.12	67.70	825.97	813.85
MW-0608-S2	9/27/2011	14.31	67.99	825.97	811.66
MW-0608-S2	3/29/2012	11.90	67.90	825.97	814.07
MW-0608-S2	10/9/2012	17.22	67.75	825.97	808.75
MW-0608-S2	3/21/2013	12.43	67.75	825.97	813.54
MW-0608-S2	9/24/2013	14.96	67.04	825.97	811.01
MW-0608-S2	4/22/2014	13.02	68.94	825.97	812.95
MW-0608-S2	9/3/2014	16.41	67.81	825.97	809.56
MW-0608-S2	3/10/2015	14.10	NM	825.97	811.87
MW-0608-S2	9/8/2015	12.80	68.73	825.97	813.17
MW-0608-S2	3/10/2016	12.48	67.96	825.97	813.49
MW-0608-S2	9/7/2016	15.17	67.91	825.97	810.80
MW-0608-S2	11/16/2016	13.82	NM	825.97	812.15
MW-0608-S2	3/3/2017	11.52	68.01	825.19	813.67
MW-0608-S2	9/6/2017	13.31	67.95	825.19	811.88
MW-0608-S2	3/6/2018	10.63	68.38	825.19	814.56
MW-0608-S2	9/12/2018	10.91	67.90	825.19	814.28
MW-0608-S2	3/4/2019	11.34	67.90	825.19	813.85
MW-0608-S2	9/6/2019	15.10	67.92	825.19	810.09
MW-0608-S2	3/4/2020	10.26	68.00	825.19	814.93
MW-0608-S2	3/5/2021	14.84	67.92	825.19	810.35
MW-0608-S2	10/8/2021	15.46	65.95	825.19	809.73
MW-0608-S2	3/1/2022	11.38	67.80	825.19	813.81
MW-0609-S1	3/23/2006	9.49	28.45	822.75	813.26
MW-0609-S1	3/31/2006	9.17	28.45	822.75	813.58
MW-0609-S1	4/28/2006	9.47	NM	822.75	813.28
MW-0609-S1	12/5/2006	8.62	NM	822.75	814.13
MW-0609-S1	3/9/2007	9.15	27.05	822.75	813.60
MW-0609-S1	1/16/2008	9.45	27.40	822.75	813.30
MW-0609-S1	11/11/2008	11.81	27.05	822.75	810.94
MW-0609-S1	2/17/2009	10.22	NM	822.75	812.53
MW-0609-S1	6/12/2009	9.73	NM	822.75	813.02
MW-0609-S1	4/13/2010	9.84	26.99	822.75	812.91
MW-0609-S1	9/5/2010	11.35	27.05	822.75	811.40
MW-0609-S1	4/20/2011	9.13	27.00	822.75	813.62

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0609-S1	9/27/2011	9.85	27.04	822.75	812.90
MW-0609-S1	3/29/2012	9.76	27.11	822.75	812.99
MW-0609-S1	10/9/2012	11.31	26.80	822.75	811.44
MW-0609-S1	3/12/2013	18.78	26.80	822.75	803.97
MW-0609-S1	9/24/2013	10.64	27.00	822.75	812.11
MW-0609-S1	4/22/2014	10.00	26.93	822.75	812.75
MW-0609-S1	9/3/2014	10.84	26.83	822.75	811.91
MW-0609-S1	9/8/2015	10.32	26.87	822.75	812.43
MW-0609-S1	3/10/2016	9.86	26.77	822.75	812.89
MW-0609-S1	9/7/2016	10.43	26.68	822.75	812.32
MW-0609-S1	11/16/2016	10.83	NM	822.75	811.92
MW-0609-S1	3/3/2017	9.67	26.65	822.00	812.33
MW-0609-S1	9/6/2017	10.15	26.60	822.00	811.85
MW-0609-S1	3/6/2018	NM	NM	822.00	NM
MW-0609-S1	9/12/2018	9.05	25.75	822.00	812.95
MW-0609-S1	3/4/2019	9.50	25.80	822.00	812.50
MW-0609-S1	9/6/2019	10.01	25.82	822.00	811.99
MW-0609-S1	3/4/2020	9.30	25.76	822.00	812.70
MW-0609-S1	3/5/2021	10.11	25.81	822.00	811.89
MW-0609-S1	10/8/2021	9.95	25.81	822.00	812.05
MW-0609-S1	3/1/2022	8.80	25.70	822.00	813.20
MW-0609-S2	12/5/2006	5.68	NM	823.09	817.41
MW-0609-S2	3/8/2007	6.93	61.32	823.09	816.16
MW-0609-S2	1/16/2008	9.24	61.44	823.09	813.85
MW-0609-S2	11/11/2008	14.97	61.30	823.09	808.12
MW-0609-S2	2/17/2009	11.60	NM	823.09	811.49
MW-0609-S2	6/12/2009	9.86	NM	823.09	813.23
MW-0609-S2	4/13/2010	8.77	62.43	823.09	814.32
MW-0609-S2	9/5/2010	13.69	61.45	823.09	809.40
MW-0609-S2	4/20/2011	9.22	61.30	823.09	813.87
MW-0609-S2	9/27/2011	11.52	61.59	823.09	811.57
MW-0609-S2	3/29/2012	9.15	61.52	823.09	813.94
MW-0609-S2	10/9/2012	14.36	26.80	823.09	808.73
MW-0609-S2	3/12/2013	9.62	26.80	823.09	813.47
MW-0609-S2	9/24/2013	12.15	61.54	823.09	810.94
MW-0609-S2	4/22/2014	10.21	61.49	823.09	812.88
MW-0609-S2	9/3/2014	13.53	61.51	823.09	809.56
MW-0609-S2	3/10/2015	11.23	NM	823.09	811.86
MW-0609-S2	9/8/2015	10.10	62.50	823.09	812.99
MW-0609-S2	3/10/2016	9.65	61.53	823.09	813.44
MW-0609-S2	9/7/2016	12.37	61.43	823.09	810.72
MW-0609-S2	11/16/2016	10.96	NM	823.09	812.13
MW-0609-S2	3/3/2017	8.73	61.53	822.46	813.73
MW-0609-S2	9/6/2017	10.50	61.52	822.46	811.96
MW-0609-S2	3/6/2018	7.72	61.63	822.46	814.74

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0609-S2	9/12/2018	6.11	61.45	822.46	816.35
MW-0609-S2	3/4/2019	8.48	61.43	822.46	813.98
MW-0609-S2	9/6/2019	12.24	61.50	822.46	810.22
MW-0609-S2	3/4/2020	7.45	61.54	822.46	815.01
MW-0609-S2	3/5/2021	11.93	61.55	822.46	810.53
MW-0609-S2	10/8/2021	12.64	61.50	822.46	809.82
MW-0609-S2	3/1/2022	8.55	61.40	822.46	813.91
MW-0610-S1	12/5/2006	8.87	NM	822.55	813.68
MW-0610-S1	3/8/2007	9.42	31.55	822.55	813.13
MW-0610-S1	1/16/2008	9.97	31.59	822.55	812.58
MW-0610-S1	11/11/2008	11.85	31.46	822.55	810.70
MW-0610-S1	2/17/2009	10.39	NM	822.55	812.16
MW-0610-S1	6/12/2009	10.07	NM	822.55	812.48
MW-0610-S1	4/13/2010	10.28	31.49	822.55	812.27
MW-0610-S1	9/5/2010	11.55	31.65	822.55	811.00
MW-0610-S1	4/20/2011	9.55	31.42	822.55	813.00
MW-0610-S1	9/27/2011	11.18	31.68	822.55	811.37
MW-0610-S1	3/29/2012	10.13	31.64	822.55	812.42
MW-0610-S1	10/9/2012	11.39	31.44	822.55	811.16
MW-0610-S1	3/12/2013	10.16	31.44	822.55	812.39
MW-0610-S1	9/24/2013	10.85	31.63	822.55	811.70
MW-0610-S1	4/22/2014	9.45	31.65	822.55	813.10
MW-0610-S1	9/3/2014	11.06	31.59	822.55	811.49
MW-0610-S1	3/10/2015	10.41	31.64	822.55	812.14
MW-0610-S1	9/8/2015	10.59	31.67	822.55	811.96
MW-0610-S1	3/10/2016	10.11	31.65	822.55	812.44
MW-0610-S1	9/7/2016	10.78	31.66	822.55	811.77
MW-0610-S1	11/16/2016	11.07	NM	822.55	811.48
MW-0610-S1	3/3/2017	9.89	31.67	821.78	811.89
MW-0610-S1	9/6/2017	10.28	31.61	821.78	811.50
MW-0610-S1	3/6/2018	9.60	31.86	821.78	812.18
MW-0610-S1	9/12/2018	9.28	31.65	821.78	812.50
MW-0610-S1	3/4/2019	9.65	31.60	821.78	812.13
MW-0610-S1	9/6/2019	10.73	31.62	821.78	811.05
MW-0610-S1	3/4/2020	9.60	31.69	821.78	812.18
MW-0610-S1	3/5/2021	10.30	31.69	821.78	811.48
MW-0610-S1	10/8/2021	10.20	31.67	821.78	811.58
MW-0610-S1	3/1/2022	9.35	31.60	821.78	812.43
MW-0611-S1	12/5/2006	4.97	NM	821.77	816.80
MW-0611-S1	3/8/2007	7.45	17.60	821.77	814.32
MW-0611-S1	1/16/2008	8.06	17.70	821.77	813.71
MW-0611-S1	2/17/2009	11.15	NM	821.77	810.62
MW-0611-S1	6/12/2009	10.00	NM	821.77	811.77
MW-0611-S1	4/13/2010	8.85	17.60	821.77	812.92
MW-0611-S1	9/5/2010	12.67	17.65	821.77	809.10

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0611-S1	10/9/2012	Well covered with debris.			
MW-0611-S1	11/16/2016	10.72	NM	821.77	811.05
MW-0611-S1	3/3/2017	8.65	17.76	818.04	809.39
MW-0611-S1	9/6/2017	Well covered with debris.			
MW-0611-S1	3/6/2018	7.31	17.82	818.04	810.73
MW-0611-S1	9/12/2018	6.05	17.60	818.04	811.99
MW-0611-S1	9/6/2019	9.69	17.40	818.04	808.35
MW-0611-S1R	3/4/2020	7.90	17.65	820.91	813.01
MW-0611-S1R	3/5/2021	10.12	17.86	820.91	810.79
MW-0611-S1-R	10/8/2021	10.26	17.83	820.91	810.65
MW-0611-S1-R	3/1/2022	7.60	17.80	820.91	813.31
MW-0612-S1	12/5/2006	9.13	NM	823.85	814.72
MW-0612-S1	3/8/2007	8.90	27.12	823.85	814.95
MW-0612-S1	1/16/2008	9.50	27.25	823.85	814.35
MW-0612-S1	11/11/2008	12.44	27.15	823.85	811.41
MW-0612-S1	2/17/2009	10.59	NM	823.85	813.26
MW-0612-S1	6/12/2009	9.71	NM	823.85	814.14
MW-0612-S1	3/29/2012	9.79	27.30	823.85	814.06
MW-0612-S1	10/9/2012	11.84	27.10	823.85	812.01
MW-0612-S1	3/12/2013	10.10	27.10	823.85	813.75
MW-0612-S1	9/24/2013	10.49	27.32	823.85	813.36
MW-0612-S1	4/22/2014	10.03	27.30	823.85	813.82
MW-0612-S1	9/3/2014	11.29	27.31	823.85	812.56
MW-0612-S1	3/10/2015	10.30	27.30	823.85	813.55
MW-0612-S1	9/8/2015	10.52	27.33	823.85	813.33
MW-0612-S1	3/10/2016	9.95	27.33	823.85	813.90
MW-0612-S1	9/7/2016	10.66	27.33	823.85	813.19
MW-0612-S1	11/16/2016	10.98	NM	823.85	812.87
MW-0612-S1	3/3/2017	9.70	27.34	823.14	813.44
MW-0612-S1	9/6/2017	10.12	27.30	823.14	813.02
MW-0612-S1	3/6/2018	8.93	27.39	823.14	814.21
MW-0612-S1	9/12/2018	8.84	27.30	823.14	814.30
MW-0612-S1	3/4/2019	9.38	27.29	823.14	813.76
MW-0612-S1	9/6/2019	10.65	27.30	823.14	812.49
MW-0612-S1	3/4/2020	9.29	27.38	823.14	813.85
MW-0612-S1	3/5/2021	10.48	27.35	823.14	812.66
MW-0612-S1	10/8/2021	10.25	27.32	823.14	812.89
MW-0612-S1	3/1/2022	9.80	27.28	823.14	813.34
MW-0612-S2	12/5/2006	6.34	NM	823.84	817.50
MW-0612-S2	3/8/2007	7.59	54.94	823.84	816.25
MW-0612-S2	1/16/2008	10.00	55.10	823.84	813.84
MW-0612-S2	11/11/2008	15.74	55.00	823.84	808.10
MW-0612-S2	2/17/2009	12.34	NM	823.84	811.50
MW-0612-S2	6/12/2009	10.57	NM	823.84	813.27
MW-0612-S2	3/29/2012	9.78	55.14	823.84	814.06

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0612-S2	10/9/2012	15.14	54.90	823.84	808.70
MW-0612-S2	3/12/2013	10.35	54.90	823.84	813.49
MW-0612-S2	9/24/2013	12.57	55.15	823.84	811.27
MW-0612-S2	4/22/2014	10.91	55.11	823.84	812.93
MW-0612-S2	9/3/2014	14.28	55.07	823.84	809.56
MW-0612-S2	3/10/2015	11.96	NM	823.84	811.88
MW-0612-S2	9/8/2015	10.60	54.65	823.84	813.24
MW-0612-S2	3/10/2016	10.38	55.98	823.84	813.46
MW-0612-S2	9/7/2016	12.87	55.14	823.84	810.97
MW-0612-S2	11/16/2016	11.71	NM	823.84	812.13
MW-0612-S2	3/3/2017	9.43	55.18	823.14	813.71
MW-0612-S2	9/6/2017	11.23	55.11	823.14	811.91
MW-0612-S2	3/6/2018	8.43	55.62	823.14	814.71
MW-0612-S2	9/12/2018	8.78	55.11	823.14	814.36
MW-0612-S2	3/4/2019	9.17	55.11	823.14	813.97
MW-0612-S2	9/6/2019	12.98	55.11	823.14	810.16
MW-0612-S2	3/4/2020	8.11	55.20	823.14	815.03
MW-0612-S2	3/5/2021	12.71	55.16	823.14	810.43
MW-0612-S2	10/8/2021	13.25	55.14	823.14	809.89
MW-0612-S2	3/1/2022	9.28	55.08	823.14	813.86
MW-0613-S1	12/5/2006	5.87	NM	822.03	816.16
MW-0613-S1	3/8/2007	6.72	25.36	822.03	815.31
MW-0613-S1	1/16/2008	7.40	25.50	822.03	814.63
MW-0613-S1	11/11/2008	10.57	25.39	822.03	811.46
MW-0613-S1	2/17/2009	8.53	NM	822.03	813.50
MW-0613-S1	6/12/2009	7.61	NM	822.03	814.42
MW-0613-S1	4/13/2010	7.40	25.40	822.03	814.63
MW-0613-S1	9/5/2010	9.85	25.40	822.03	812.18
MW-0613-S1	4/20/2011	6.79	25.58	822.03	815.24
MW-0613-S1	9/27/2011	7.84	25.58	822.03	814.19
MW-0613-S1	3/29/2012	7.53	25.34	822.03	814.50
MW-0613-S1	10/9/2012	9.96	25.37	822.03	812.07
MW-0613-S1	3/12/2013	8.01	25.37	822.03	814.02
MW-0613-S1	9/24/2013	9.03	25.55	822.03	813.00
MW-0613-S1	4/22/2014	7.97	25.55	822.03	814.06
MW-0613-S1	9/3/2014	9.34	25.55	822.03	812.69
MW-0613-S1	3/10/2015	8.32	24.81	822.03	813.71
MW-0613-S1	9/8/2015	8.49	25.61	822.03	813.54
MW-0613-S1	3/10/2016	7.86	25.78	822.03	814.17
MW-0613-S1	9/7/2016	8.67	25.58	822.03	813.36
MW-0613-S1	11/16/2016	8.76	NM	822.03	813.27
MW-0613-S1	3/3/2017	7.61	25.60	821.47	813.86
MW-0613-S1	9/6/2017	8.02	25.59	821.47	813.45
MW-0613-S1	3/6/2018	8.76	25.77	821.47	812.71
MW-0613-S1	9/12/2018	6.66	25.55	821.47	814.81

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0613-S1	3/4/2019	7.30	25.54	821.47	814.17
MW-0613-S1	9/6/2019	8.75	25.60	821.47	812.72
MW-0613-S1	3/4/2020	7.20	25.66	821.47	814.27
MW-0613-S1	3/5/2021	8.54	25.62	821.47	812.93
MW-0613-S1	10/8/2021	8.27	25.60	821.47	813.20
MW-0613-S1	3/1/2022	6.70	25.55	821.47	814.77
MW-0614-B1	12/5/2006	9.13	NM	826.94	817.81
MW-0614-B1	3/8/2007	10.41	89.69	826.94	816.53
MW-0614-B1	1/16/2008	13.06	89.75	826.94	813.88
MW-0614-B1	11/11/2008	18.92	89.62	826.94	808.02
MW-0614-B1	2/17/2009	15.55	NM	826.94	811.39
MW-0614-B1	6/12/2009	13.69	NM	826.94	813.25
MW-0614-B1	4/13/2010	12.68	89.75	826.94	814.26
MW-0614-B1	9/5/2010	17.66	90.20	826.94	809.28
MW-0614-B1	4/20/2011	13.10	89.60	826.94	813.84
MW-0614-B1	9/27/2011	15.31	89.90	826.94	811.63
MW-0614-B1	9/3/2015	Abandoned Well			
MW-0614-S2	12/5/2006	9.05	NM	826.81	817.76
MW-0614-S2	3/8/2007	10.33	57.68	826.81	816.48
MW-0614-S2	1/16/2008	13.00	57.80	826.81	813.81
MW-0614-S2	11/11/2008	18.81	57.55	826.81	808.00
MW-0614-S2	2/17/2009	15.45	NM	826.81	811.36
MW-0614-S2	6/12/2009	13.58	NM	826.81	813.23
MW-0614-S2	4/13/2010	12.58	57.80	826.81	814.23
MW-0614-S2	9/5/2010	17.57	58.05	826.81	809.24
MW-0614-S2	4/20/2011	12.97	57.65	826.81	813.84
MW-0614-S2	9/27/2011	15.21	57.90	826.81	811.60
MW-0614-S2	3/29/2012	12.84	57.85	826.81	813.97
MW-0614-S2	10/9/2012	18.27	57.70	826.81	808.54
MW-0614-S2	3/12/2013	13.25	57.70	826.81	813.56
MW-0614-S2	9/24/2013	15.91	57.91	826.81	810.90
MW-0614-S2	4/22/2014	13.78	57.87	826.81	813.03
MW-0614-S2	9/3/2014	16.43	57.85	826.81	810.38
MW-0614-S2	3/10/2015	15.13	NM	826.81	811.68
MW-0614-S2	9/8/2015	13.36	57.95	826.81	813.45
MW-0614-S2	3/10/2016	13.41	57.88	826.81	813.40
MW-0614-S2	9/7/2016	15.91	57.49	826.81	810.90
MW-0614-S2	11/16/2016	14.86	NM	826.81	811.95
MW-0614-S2	3/3/2017	12.22	57.93	826.22	814.00
MW-0614-S2	9/6/2017	14.30	57.84	826.22	811.92
MW-0614-S2	3/6/2018	11.38	58.44	826.22	814.84
MW-0614-S2	9/12/2018	11.71	57.82	826.22	814.51
MW-0614-S2	3/4/2019	12.20	57.85	826.22	814.02
MW-0614-S2	9/6/2019	16.18	57.90	826.22	810.04
MW-0614-S2	3/4/2020	11.00	57.91	826.22	815.22

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0614-S2	3/5/2021	15.86	57.92	826.22	810.36
MW-0614-S2	10/8/2021	16.32	57.82	826.22	809.90
MW-0614-S2	3/1/2022	12.35	57.65	826.22	813.87
MW-0615-B1	12/5/2006	12.12	NM	824.74	812.62
MW-0615-B1	3/8/2007	13.37	78.28	824.74	811.37
MW-0615-B1	1/16/2008	13.84	78.45	824.74	810.90
MW-0615-B1	11/11/2008	18.16	78.19	824.74	806.58
MW-0615-B1	2/17/2009	14.75	NM	824.74	809.99
MW-0615-B1	6/12/2009	14.12	NM	824.74	810.62
MW-0615-B1	4/13/2010	13.53	78.36	824.74	811.21
MW-0615-B1	9/5/2010	17.05	78.35	824.74	807.69
MW-0615-B1	4/20/2011	14.05	78.26	824.74	810.69
MW-0615-B1	9/27/2011	15.19	78.45	824.74	809.55
MW-0615-B1	8/25/2015	Abandoned Well			
MW-0616-B1	12/5/2006	4.58	110.55	822.30	817.72
MW-0616-B1	3/8/2007	5.88	110.55	822.30	816.42
MW-0616-B1	1/16/2008	8.60	110.55	822.30	813.70
MW-0616-B1	11/11/2008	14.52	110.51	822.30	807.78
MW-0616-B1	2/17/2009	11.02	NM	822.30	811.28
MW-0616-B1	6/12/2009	9.18	NM	822.30	813.12
MW-0616-B1	4/13/2010	8.23	NM	822.30	814.07
MW-0616-B1	9/5/2010	13.10	NM	822.30	809.20
MW-0616-B1	4/20/2011	8.51	NM	822.30	813.79
MW-0616-B1	9/27/2011	10.76	110.80	822.30	811.54
MW-0616-B1	9/2/2015	Abandoned Well			
MW-0616-S1	12/5/2006	6.58	NM	822.06	815.48
MW-0616-S1	3/8/2007	7.11	24.36	822.06	814.95
MW-0616-S1	1/16/2008	7.47	24.50	822.06	814.59
MW-0616-S1	11/11/2008	9.84	24.25	822.06	812.22
MW-0616-S1	2/17/2009	8.31	NM	822.06	813.75
MW-0616-S1	6/12/2009	7.53	NM	822.06	814.53
MW-0616-S1	4/13/2010	7.49	24.30	822.06	814.57
MW-0616-S1	9/5/2010	9.28	24.25	822.06	812.78
MW-0616-S1	4/20/2011	6.39	24.22	822.06	815.67
MW-0616-S1	9/27/2011	7.53	24.40	822.06	814.53
MW-0616-S1	3/29/2012	7.68	24.53	822.06	814.38
MW-0616-S1	10/9/2012	9.32	24.19	822.06	812.74
MW-0616-S1	3/12/2013	8.09	24.19	822.06	813.97
MW-0616-S1	9/24/2013	8.59	24.24	822.06	813.47
MW-0616-S1	4/22/2014	7.83	24.24	822.06	814.23
MW-0616-S1	9/3/2014	8.70	24.21	822.06	813.36
MW-0616-S1	3/10/2015	7.97	22.50	822.06	814.09
MW-0616-S1	9/8/2015	8.29	24.21	822.06	813.77
MW-0616-S1	3/10/2016	7.79	24.17	822.06	814.27

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0616-S1	9/7/2016	14.49	24.19	822.06	807.57
MW-0616-S1	11/16/2016	8.87	NM	822.06	813.19
MW-0616-S1	3/3/2017	7.73	24.02	821.29	813.56
MW-0616-S1	9/6/2017	7.84	24.00	821.29	813.45
MW-0616-S1	3/6/2018	7.12	24.24	821.29	814.17
MW-0616-S1	9/12/2018	6.94	24.09	821.29	814.35
MW-0616-S1	3/4/2019	7.43	24.05	821.29	813.86
MW-0616-S1	9/6/2019	8.75	24.02	821.29	812.54
MW-0616-S1	3/4/2020	7.51	24.10	821.29	813.78
MW-0616-S1	3/5/2021	8.26	23.97	821.29	813.03
MW-0616-S1	10/8/2021	7.88	23.99	821.29	813.41
MW-0616-S1	3/1/2022	7.00	23.98	821.29	814.29
MW-0617-B1	3/8/2007	10.02	NM	826.63	816.61
MW-0617-B1	1/16/2008	12.58	NM	826.63	814.05
MW-0617-B1	11/11/2008	18.49	NM	826.63	808.14
MW-0617-B1	2/17/2009	15.08	NM	826.63	811.55
MW-0617-B1	6/12/2009	13.25	NM	826.63	813.38
MW-0617-B1	9/3/2015	Abandoned Well			
MW-0617-S1	3/8/2007	11.18	29.36	826.47	815.29
MW-0617-S1	1/16/2008	11.90	29.50	826.47	814.57
MW-0617-S1	11/11/2008	14.87	29.40	826.47	811.60
MW-0617-S1	2/17/2009	13.07	NM	826.47	813.40
MW-0617-S1	6/12/2009	12.03	NM	826.47	814.44
MW-0617-S1	10/9/2012	14.27	29.41	826.47	812.20
MW-0617-S1	3/12/2013	12.64	29.41	826.47	813.83
MW-0617-S1	9/24/2013	13.38	29.50	826.47	813.09
MW-0617-S1	4/22/2014	12.32	29.47	826.47	814.15
MW-0617-S1	9/3/2014	13.63	29.51	826.47	812.84
MW-0617-S1	3/10/2015	12.72	29.49	826.47	813.75
MW-0617-S1	9/8/2015	12.89	29.30	826.47	813.58
MW-0617-S1	3/10/2016	12.37	29.58	826.47	814.10
MW-0617-S1	9/7/2016	13.05	29.57	826.47	813.42
MW-0617-S1	11/16/2016	13.32	NM	826.47	813.15
MW-0617-S1	3/3/2017	12.04	28.25	826.10	814.06
MW-0617-S1	9/6/2017	12.47	29.50	826.10	813.63
MW-0617-S1	3/6/2018	10.21	29.49	826.10	815.89
MW-0617-S1	9/12/2018	11.08	29.45	826.10	815.02
MW-0617-S1	3/4/2019	11.72	29.49	826.10	814.38
MW-0617-S1	9/6/2019	13.05	29.50	826.10	813.05
MW-0617-S1	3/4/2020	11.72	29.43	826.10	814.38
MW-0617-S1	3/5/2021	12.97	29.54	826.10	813.13
MW-0617-S1	10/8/2021	12.68	29.52	826.10	813.42
MW-0617-S1	3/1/2022	11.08	29.46	826.10	815.02
MW-0617-S2	3/8/2007	10.21	63.37	826.66	816.45
MW-0617-S2	1/16/2008	12.80	63.15	826.66	813.86

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0617-S2	11/11/2008	18.68	63.20	826.66	807.98
MW-0617-S2	2/17/2009	15.33	NM	826.66	811.33
MW-0617-S2	6/12/2009	13.44	NM	826.66	813.22
MW-0617-S2	6/12/2009	13.44	NM	826.66	813.22
MW-0617-S2	3/10/2016	13.02	NM	826.66	813.64
MW-0617-S2	9/7/2016	15.01	63.22	826.66	811.65
MW-0617-S2	11/16/2016	14.57	63.45	826.66	812.09
MW-0617-S2	3/3/2017	12.22	62.98	826.02	813.80
MW-0617-S2	9/6/2017	14.18	63.27	826.02	811.84
MW-0617-S2	3/6/2018	11.26	62.83	826.02	814.76
MW-0617-S2	9/12/2018	Unable to locate.			
MW-0617-S2	3/4/2019	12.00	62.75	826.02	814.02
MW-0617-S2	9/6/2019	15.85	62.90	826.02	810.17
MW-0617-S2	3/4/2020	10.83	62.80	826.02	815.19
MW-0617-S2	3/5/2021	15.66	62.98	826.02	810.36
MW-0617-S2	10/8/2021	16.15	63.15	826.02	809.87
MW-0617-S2	3/1/2022	12.06	63.00	826.02	813.96
MW-0618-S1	12/5/2006	8.13	NM	824.84	816.71
MW-0618-S1	3/8/2007	9.08	27.00	824.84	815.76
MW-0618-S1	1/16/2008	9.72	27.12	824.84	815.12
MW-0618-S1	11/11/2008	13.07	27.05	824.84	811.77
MW-0618-S1	2/17/2009	11.09	NM	824.84	813.75
MW-0618-S1	6/12/2009	9.94	NM	824.84	814.90
MW-0618-S1	4/13/2010	9.73	27.31	824.84	815.11
MW-0618-S1	9/5/2010	12.32	27.05	824.84	812.52
MW-0618-S1	4/20/2011	9.13	26.99	824.84	815.71
MW-0618-S1	9/27/2011	10.28	27.20	824.84	814.56
MW-0618-S1	3/29/2012	10.06	27.19	824.84	814.78
MW-0618-S1	10/9/2012	12.43	26.99	824.84	812.41
MW-0618-S1	3/12/2013	10.51	26.99	824.84	814.33
MW-0618-S1	9/24/2013	11.48	27.18	824.84	813.36
MW-0618-S1	4/22/2014	10.28	27.17	824.84	814.56
MW-0618-S1	9/3/2014	11.78	27.18	824.84	813.06
MW-0618-S1	3/10/2015	10.68	NM	824.84	814.16
MW-0618-S1	9/8/2015	10.93	27.19	824.84	813.91
MW-0618-S1	3/10/2016	10.25	27.18	824.84	814.59
MW-0618-S1	9/7/2016	11.09	27.17	824.84	813.75
MW-0618-S1	11/16/2016	16.59	NM	824.84	808.25
MW-0618-S1	3/3/2017	10.01	27.21	824.22	814.21
MW-0618-S1	9/6/2017	10.43	27.20	824.22	813.79
MW-0618-S1	3/6/2018	9.10	27.24	824.22	815.12
MW-0618-S1	9/12/2018	8.86	27.20	824.22	815.36
MW-0618-S1	3/4/2019	9.62	27.15	824.22	814.60
MW-0618-S1	9/6/2019	Well access blocked via dumpster.			
MW-0618-S1	3/4/2020	9.65	27.22	824.22	814.57

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0618-S1	3/5/2021	11.07	27.21	824.22	813.15
MW-0618-S1	10/8/2021	10.72	27.19	824.22	813.50
MW-0618-S1	3/1/2022	9.01	27.14	824.22	815.21
MW-0619-S1	12/5/2006	10.13	NM	827.46	817.33
MW-0619-S1	3/8/2007	11.12	26.07	827.46	816.34
MW-0619-S1	1/16/2008	11.88	26.20	827.46	815.58
MW-0619-S1	11/11/2008	15.29	26.10	827.46	812.17
MW-0619-S1	2/17/2009	13.51	NM	827.46	813.95
MW-0619-S1	6/12/2009	12.03	NM	827.46	815.43
MW-0619-S1	10/9/2012	14.69	26.07	827.46	812.77
MW-0619-S1	3/12/2013	12.85	26.07	827.46	814.61
MW-0619-S1	9/24/2013	13.65	26.25	827.46	813.81
MW-0619-S1	4/22/2014	12.34	26.24	827.46	815.12
MW-0619-S1	9/3/2014	14.02	26.26	827.46	813.44
MW-0619-S1	3/10/2015	12.93	26.24	827.46	814.53
MW-0619-S1	9/8/2015	13.05	26.26	827.46	814.41
MW-0619-S1	3/10/2016	12.55	26.33	827.46	814.91
MW-0619-S1	9/7/2016	13.33	26.21	827.46	814.13
MW-0619-S1	11/16/2016	13.61	NM	827.46	813.85
MW-0619-S1	3/3/2017	12.07	26.02	826.12	814.05
MW-0619-S1	9/6/2017	12.57	26.26	826.12	813.55
MW-0619-S1	3/6/2018	11.07	26.22	826.12	815.05
MW-0619-S1	9/12/2018	11.00	26.20	826.12	815.12
MW-0619-S1	3/4/2019	11.68	26.23	826.12	814.44
MW-0619-S1	9/6/2019	13.25	26.20	826.12	812.87
MW-0619-S1	3/4/2020	11.88	26.20	826.12	814.24
MW-0619-S1	3/5/2021	13.29	26.20	826.12	812.83
MW-0619-S1	10/8/2021	12.90	26.10	826.12	813.22
MW-0619-S1	3/1/2022	11.10	26.15	826.12	815.02
MW-0620-S1	12/5/2006	9.94	NM	827.39	817.45
MW-0620-S1	3/8/2007	10.97	18.36	827.39	816.42
MW-0620-S1	1/16/2008	11.78	18.46	827.39	815.61
MW-0620-S1	11/11/2008	15.15	18.45	827.39	812.24
MW-0620-S1	2/17/2009	13.41	NM	827.39	813.98
MW-0620-S1	6/12/2009	11.89	NM	827.39	815.50
MW-0620-S1	4/13/2010	11.60	18.39	827.39	815.79
MW-0620-S1	9/5/2010	13.85	18.40	827.39	813.54
MW-0620-S1	4/20/2011	11.07	18.34	827.39	816.32
MW-0620-S1	9/27/2011	12.19	18.55	827.39	815.20
MW-0620-S1	3/29/2012	11.95	18.50	827.39	815.44
MW-0620-S1	10/9/2012	14.60	19.38	827.39	812.79
MW-0620-S1	3/12/2013	12.82	19.38	827.39	814.57
MW-0620-S1	9/24/2013	13.55	18.54	827.39	813.84
MW-0620-S1	4/22/2014	12.19	18.52	827.39	815.20
MW-0620-S1	9/3/2014	13.15	18.52	827.39	814.24

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0620-S1	3/10/2015	13.17	18.53	827.39	814.22
MW-0620-S1	9/8/2015	12.97	18.32	827.39	814.42
MW-0620-S1	3/10/2016	12.31	18.62	827.39	815.08
MW-0620-S1	9/7/2016	13.23	18.55	827.39	814.16
MW-0620-S1	11/16/2016	13.49	NM	827.39	813.90
MW-0620-S1	3/3/2017	11.88	18.30	826.86	814.98
MW-0620-S1	9/6/2017	12.47	18.83	826.86	814.39
MW-0620-S1	3/6/2018	9.94	18.54	826.86	816.92
MW-0620-S1	9/12/2018	10.40	18.50	826.86	816.46
MW-0620-S1	3/4/2019	11.51	18.54	826.86	815.35
MW-0620-S1	9/6/2019	13.13	18.50	826.86	813.73
MW-0620-S1	3/4/2020	11.11	18.47	826.86	815.75
MW-0620-S1	3/5/2021	12.31	18.52	826.86	814.55
MW-0620-S1	10/8/2021	12.82	18.60	826.86	814.04
MW-0620-S1	3/1/2022	10.53	18.50	826.86	816.33
MW-0621-S1	12/5/2006	9.53	NM	826.72	817.19
MW-0621-S1	3/8/2007	10.49	24.55	826.72	816.23
MW-0621-S1	1/16/2008	11.19	24.66	826.72	815.53
MW-0621-S1	11/11/2008	14.62	24.58	826.72	812.10
MW-0621-S1	2/17/2009	12.84	NM	826.72	813.88
MW-0621-S1	6/12/2009	11.39	NM	826.72	815.33
MW-0621-S1	4/13/2010	11.15	24.63	826.72	815.57
MW-0621-S1	9/5/2010	13.86	24.62	826.72	812.86
MW-0621-S1	4/20/2011	10.68	24.54	826.72	816.04
MW-0621-S1	9/27/2011	11.81	24.78	826.72	814.91
MW-0621-S1	3/29/2012	11.47	24.71	826.72	815.25
MW-0621-S1	10/9/2012	14.05	24.61	826.72	812.67
MW-0621-S1	3/12/2013	12.19	24.61	826.72	814.53
MW-0621-S1	9/24/2013	13.00	24.73	826.72	813.72
MW-0621-S1	4/22/2014	11.71	24.72	826.72	815.01
MW-0621-S1	9/3/2014	13.31	24.74	826.72	813.41
MW-0621-S1	3/10/2015	12.28	24.73	826.72	814.44
MW-0621-S1	9/8/2015	12.38	24.53	826.72	814.34
MW-0621-S1	3/10/2016	11.90	24.85	826.72	814.82
MW-0621-S1	9/7/2016	12.76	24.76	826.72	813.96
MW-0621-S1	11/16/2016	12.92	NM	826.72	813.80
MW-0621-S1	3/3/2017	11.47	24.57	826.14	814.67
MW-0621-S1	9/6/2017	11.91	24.75	826.14	814.23
MW-0621-S1	3/6/2018	10.42	24.78	826.14	815.72
MW-0621-S1	9/12/2018	10.40	24.73	826.14	815.74
MW-0621-S1	3/4/2019	11.05	24.73	826.14	815.09
MW-0621-S1	9/6/2019	12.63	24.75	826.14	813.51
MW-0621-S1	3/4/2020	11.23	24.70	826.14	814.91
MW-0621-S1	3/5/2021	12.71	24.79	826.14	813.43
MW-0621-S1	10/8/2021	14.48	24.75	826.14	811.66

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0621-S1	3/1/2022	10.45	24.72	826.14	815.69
MW-0622-S1	12/5/2006	11.03	NM	828.57	817.54
MW-0622-S1	3/8/2007	12.07	23.78	828.57	816.50
MW-0622-S1	1/16/2008	12.90	23.85	828.57	815.67
MW-0622-S1	11/11/2008	16.27	23.82	828.57	812.30
MW-0622-S1	2/17/2009	14.59	NM	828.57	813.98
MW-0622-S1	6/12/2009	12.98	NM	828.57	815.59
MW-0622-S1	10/9/2012	15.71	23.75	828.57	812.86
MW-0622-S1	3/12/2013	13.89	23.75	828.57	814.68
MW-0622-S1	9/24/2013	14.66	23.92	828.57	813.91
MW-0622-S1	4/22/2014	13.24	23.94	828.57	815.33
MW-0622-S1	9/3/2014	15.02	23.89	828.57	813.55
MW-0622-S1	3/10/2015	13.95	23.98	828.57	814.62
MW-0622-S1	9/8/2015	14.02	23.96	828.57	814.55
MW-0622-S1	3/10/2016	13.55	24.02	828.57	815.02
MW-0622-S1	9/7/2016	14.28	23.91	828.57	814.29
MW-0622-S1	11/16/2016	14.60	NM	828.57	813.97
MW-0622-S1	3/3/2017	13.09	23.68	828.10	815.01
MW-0622-S1	9/6/2017	13.52	23.90	828.10	814.58
MW-0622-S1	3/6/2018	12.00	23.78	828.10	816.10
MW-0622-S1	9/12/2018	11.92	23.75	828.10	816.18
MW-0622-S1	3/4/2019	12.60	23.84	828.10	815.50
MW-0622-S1	9/6/2019	14.20	23.90	828.10	813.90
MW-0622-S1	3/4/2020	12.91	23.66	828.10	815.19
MW-0622-S1	3/5/2021	14.47	23.72	828.10	813.63
MW-0622-S1	10/8/2021	18.92	23.70	828.10	809.18
MW-0622-S1	3/1/2022	12.01	23.75	828.10	816.09
MW-0622-S2	12/5/2006	10.54	NM	828.66	818.12
MW-0622-S2	3/8/2007	11.81	65.94	828.66	816.85
MW-0622-S2	1/16/2008	14.01	66.05	828.66	814.65
MW-0622-S2	11/11/2008	20.76	65.95	828.66	807.90
MW-0622-S2	2/17/2009	17.31	NM	828.66	811.35
MW-0622-S2	6/12/2009	15.32	NM	828.66	813.34
MW-0622-S2	4/13/2010	14.28	66.00	828.66	814.38
MW-0622-S2	9/5/2010	19.50	66.05	828.66	809.16
MW-0622-S2	4/20/2011	14.82	65.89	828.66	813.84
MW-0622-S2	9/27/2011	17.13	66.15	828.66	811.53
MW-0622-S2	3/29/2012	14.40	66.09	828.66	814.26
MW-0622-S2	10/9/2012	20.24	65.95	828.66	808.42
MW-0622-S2	3/12/2013	15.10	65.95	828.66	813.56
MW-0622-S2	9/24/2013	17.70	66.10	828.66	810.96
MW-0622-S2	4/22/2014	15.61	67.07	828.66	813.05
MW-0622-S2	9/3/2014	19.32	66.98	828.66	809.34
MW-0622-S2	3/10/2015	16.82	NM	828.66	811.84
MW-0622-S2	9/8/2015	15.13	66.50	828.66	813.53

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0622-S2	3/10/2016	15.21	NM	828.66	813.45
MW-0622-S2	9/7/2016	17.95	66.12	828.66	810.71
MW-0622-S2	11/16/2016	16.40	NM	828.66	812.26
MW-0622-S2	3/3/2017	13.89	65.92	827.98	814.09
MW-0622-S2	9/6/2017	16.08	66.13	827.98	811.90
MW-0622-S2	3/6/2018	12.92	66.13	827.98	815.06
MW-0622-S2	9/12/2018	13.40	66.00	827.98	814.58
MW-0622-S2	3/4/2019	13.78	66.11	827.98	814.20
MW-0622-S2	9/6/2019	17.91	66.12	827.98	810.07
MW-0622-S2	3/4/2020	12.50	66.15	827.98	815.48
MW-0622-S2	3/5/2021	17.70	66.15	827.98	810.28
MW-0622-S2	10/8/2021	18.30	66.10	827.98	809.68
MW-0622-S2	3/1/2022	13.42	66.11	827.98	814.56
MW-0623-S1	3/8/2007	12.37	25.04	829.09	816.72
MW-0623-S1	1/16/2008	13.17	25.17	829.09	815.92
MW-0623-S1	11/11/2008	16.58	25.18	829.09	812.51
MW-0623-S1	2/17/2009	14.96	NM	829.09	814.13
MW-0623-S1	6/12/2009	13.37	NM	829.09	815.72
MW-0623-S1	4/13/2010	13.00	25.10	829.09	816.09
MW-0623-S1	9/5/2010	15.79	25.10	829.09	813.30
MW-0623-S1	4/20/2011	12.62	25.00	829.09	816.47
MW-0623-S1	9/27/2011	13.80	25.26	829.09	815.29
MW-0623-S1	3/29/2012	13.32	25.20	829.09	815.77
MW-0623-S1	10/9/2012	16.04	25.05	829.09	813.05
MW-0623-S1	3/12/2013	14.23	25.05	829.09	814.86
MW-0623-S1	9/24/2013	14.94	25.22	829.09	814.15
MW-0623-S1	4/22/2014	13.53	25.21	829.09	815.56
MW-0623-S1	9/3/2014	15.31	25.23	829.09	813.78
MW-0623-S1	3/10/2015	14.27	25.25	829.09	814.82
MW-0623-S1	9/8/2015	14.83	23.43	829.09	814.26
MW-0623-S1	3/10/2016	14.86	25.34	829.09	814.23
MW-0623-S1	9/7/2016	14.58	25.26	829.09	814.51
MW-0623-S1	11/16/2016	14.93	NM	829.09	814.16
MW-0623-S1	3/3/2017	13.37	25.00	828.47	815.10
MW-0623-S1	9/6/2017	13.88	25.25	828.47	814.59
MW-0623-S1	3/6/2018	12.28	25.25	828.47	816.19
MW-0623-S1	9/12/2018	12.22	25.25	828.47	816.25
MW-0623-S1	3/4/2019	12.92	25.25	828.47	815.55
MW-0623-S1	9/6/2019	14.50	25.18	828.47	813.97
MW-0623-S1	3/4/2020	13.30	25.30	828.47	815.17
MW-0623-S1	3/5/2021	14.84	25.28	828.47	813.63
MW-0623-S1	10/8/2021	14.20	25.27	828.47	814.27
MW-0623-S1	3/1/2022	12.33	25.22	828.47	816.14
MW-0702-B1	1/16/2008	10.65	72.70	825.03	814.38
MW-0702-B1	11/11/2008	16.57	72.46	825.03	808.46

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0702-B1	2/17/2009	13.19	NM	825.03	811.84
MW-0702-B1	6/12/2009	11.30	NM	825.03	813.73
MW-0702-B1	4/13/2010	10.29	72.60	825.03	814.74
MW-0702-B1	9/5/2010	15.27	72.60	825.03	809.76
MW-0702-B1	4/20/2011	10.72	72.47	825.03	814.31
MW-0702-B1	9/27/2011	12.89	72.73	825.03	812.14
MW-0702-B1	9/3/2015	Abandoned Well			
MW-0703-B1	1/16/2008	13.30	111.32	823.61	810.31
MW-0703-B1	11/11/2008	17.01	111.32	823.61	806.60
MW-0703-B1	2/17/2009	13.66	NM	823.61	809.95
MW-0703-B1	6/12/2009	13.21	NM	823.61	810.40
MW-0703-B1	4/13/2010	12.45	NM	823.61	811.16
MW-0703-B1	9/5/2010	16.10	NM	823.61	807.51
MW-0703-B1	4/20/2011	12.73	NM	823.61	810.88
MW-0703-B1	9/27/2011	14.12	111.75	823.61	809.49
MW-0703-B1	9/3/2015	Abandoned Well			
MW-0704-S1	1/16/2008	9.84	29.31	825.38	815.54
MW-0704-S1	11/11/2008	13.15	29.20	825.38	812.22
MW-0704-S1	2/17/2009	11.27	NM	825.38	814.11
MW-0704-S1	6/12/2009	10.04	NM	825.38	815.34
MW-0704-S1	4/13/2010	9.83	29.23	825.38	815.55
MW-0704-S1	9/5/2010	12.38	29.20	825.38	813.00
MW-0704-S1	4/20/2011	9.26	29.17	825.38	816.12
MW-0704-S1	9/27/2011	10.39	29.39	825.38	814.99
MW-0704-S1	3/29/2012	10.14	29.35	825.38	815.24
MW-0704-S1	10/9/2012	12.52	29.16	825.38	812.86
MW-0704-S1	3/12/2013	10.67	29.16	825.38	814.71
MW-0704-S1	9/24/2013	11.55	29.36	825.38	813.83
MW-0704-S1	4/22/2014	10.38	29.36	825.38	815.00
MW-0704-S1	9/3/2014	11.86	29.33	825.38	813.52
MW-0704-S1	3/10/2015	10.80	29.28	825.38	814.58
MW-0704-S1	9/8/2015	11.01	29.39	825.38	814.37
MW-0704-S1	3/10/2016	10.41	29.38	825.38	814.97
MW-0704-S1	9/7/2016	11.20	29.37	825.38	814.18
MW-0704-S1	11/16/2016	11.66	NM	825.38	813.72
MW-0704-S1	3/3/2017	10.09	29.38	824.44	814.35
MW-0704-S1	9/6/2017	10.54	29.34	824.44	813.90
MW-0704-S1	3/6/2018	9.14	29.58	824.44	815.30
MW-0704-S1	9/12/2018	9.05	29.30	824.44	815.39
MW-0704-S1	3/4/2019	9.71	29.32	824.44	814.73
MW-0704-S1	9/6/2019	11.22	29.35	824.44	813.22
MW-0704-S1	3/4/2020	9.27	29.42	824.44	815.17
MW-0704-S1	3/5/2021	11.17	29.40	824.44	813.27
MW-0704-S1	10/8/2021	19.82	29.39	824.44	804.62

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-0704-S1	3/1/2022	9.06	29.32	824.44	815.38
MW-0705-S1	1/16/2008	11.20	25.78	826.16	814.96
MW-0705-S1	11/11/2008	13.71	25.68	826.16	812.45
MW-0705-S1	2/17/2009	11.86	NM	826.16	814.30
MW-0705-S1	6/12/2009	10.79	NM	826.16	815.37
MW-0705-S1	10/9/2012	13.10	25.65	826.16	813.06
MW-0705-S1	3/12/2013	11.31	25.65	826.16	814.85
MW-0705-S1	9/24/2013	12.20	25.85	826.16	813.96
MW-0705-S1	4/22/2014	11.09	25.82	826.16	815.07
MW-0705-S1	9/3/2014	12.50	25.82	826.16	813.66
MW-0705-S1	3/10/2015	11.91	25.80	826.16	814.25
MW-0705-S1	9/8/2015	11.67	25.87	826.16	814.49
MW-0705-S1	3/10/2016	11.08	25.85	826.16	815.08
MW-0705-S1	9/7/2016	11.83	25.83	826.16	814.33
MW-0705-S1	11/16/2016	12.09	NM	826.16	814.07
MW-0705-S1	3/3/2017	10.86	25.88	824.79	813.93
MW-0705-S1	9/6/2017	11.23	25.80	824.79	813.56
MW-0705-S1	3/6/2018	9.93	26.13	824.79	814.86
MW-0705-S1	9/12/2018	9.81	25.81	824.79	814.98
MW-0705-S1	3/4/2019	10.45	25.80	824.79	814.34
MW-0705-S1	9/6/2019	11.94	25.80	824.79	812.85
MW-0705-S1	3/4/2020	10.44	25.85	824.79	814.35
MW-0705-S1	3/5/2021	11.73	25.84	824.79	813.06
MW-0705-S1	10/8/2021	11.45	25.37	824.79	813.34
MW-0705-S1	3/1/2022	9.91	25.80	824.79	814.88
MW-0705-S2	9/13/2018	9.81	25.81	824.79	814.98
MW-1501-S1	3/10/2016	11.67	19.04	828.32	816.65
MW-1501-S1	9/7/2016	12.41	18.93	828.32	815.91
MW-1501-S1	11/16/2016	13.33	NM	828.32	814.99
MW-1501-S1	3/3/2017	11.50	18.70	827.45	815.95
MW-1501-S1	9/6/2017	18.95	11.95	827.45	808.50
MW-1501-S1	3/6/2018	9.74	18.97	827.45	817.71
MW-1501-S1	9/12/2018	9.90	18.94	827.45	817.55
MW-1501-S1	3/4/2019	10.89	18.96	827.45	816.56
MW-1501-S1	9/6/2019	12.63	18.98	827.45	814.82
MW-1501-S1	3/4/2020	11.03	19.00	827.45	816.42
MW-1501-S1	3/5/2021	12.23	18.98	827.45	815.22
MW-1501-S1	10/8/2021	11.92	18.97	827.45	815.53
MW-1501-S1	3/1/2022	9.92	18.92	827.45	817.53
MW-1502-S1	3/10/2016	12.79	28.07	828.45	815.66
MW-1502-S1	9/7/2016	13.53	27.97	828.45	814.92
MW-1502-S1	11/16/2016	13.88	NM	828.45	814.57
MW-1502-S1	3/3/2017	12.35	27.72	827.27	814.92
MW-1502-S1	9/6/2017	12.80	27.95	827.27	814.47
MW-1502-S1	3/6/2018	11.28	28.00	827.27	815.99

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-1502-S1	9/12/2018	11.20	27.95	827.27	816.07
MW-1502-S1	3/4/2019	11.91	27.95	827.27	815.36
MW-1502-S1	9/6/2019	13.52	28.00	827.27	813.75
MW-1502-S1	3/4/2020	12.20	28.02	827.27	815.07
MW-1502-S1	3/5/2021	13.72	28.00	827.27	813.55
MW-1502-S1	10/8/2021	13.18	27.96	827.27	814.09
MW-1502-S1	3/1/2022	11.30	27.94	827.27	815.97
MW-1503-S1	3/10/2016	12.98	28.68	828.24	815.26
MW-1503-S1	9/7/2016	13.73	28.48	828.24	814.51
MW-1503-S1	11/16/2016	14.08	NM	828.24	814.16
MW-1503-S1	3/3/2017	12.53	28.28	827.45	814.92
MW-1503-S1	9/6/2017	13.03	28.50	827.45	814.42
MW-1503-S1	3/6/2018	11.47	28.50	827.45	815.98
MW-1503-S1	9/12/2018	11.38	28.50	827.45	816.07
MW-1503-S1	3/4/2019	12.11	28.50	827.45	815.34
MW-1503-S1	9/6/2019	13.70	28.50	827.45	813.75
MW-1503-S1	3/4/2020	12.40	28.52	827.45	815.05
MW-1503-S1	3/5/2021	13.92	28.52	827.45	813.53
MW-1503-S1	10/8/2021	13.36	28.49	827.45	814.09
MW-1503-S1	3/1/2022	11.50	28.50	827.45	815.95
MW-1504-S1	3/10/2016	12.98	27.62	828.24	815.26
MW-1504-S1	9/7/2016	13.73	27.43	828.24	814.51
MW-1504-S1	11/16/2016	14.08	NM	828.24	814.16
MW-1504-S1	3/3/2017	12.53	27.38	827.53	815.00
MW-1504-S1	9/6/2017	13.03	27.43	827.53	814.50
MW-1504-S1	3/6/2018	13.43	27.42	827.53	814.10
MW-1504-S1	9/12/2018	11.38	27.47	827.53	816.15
MW-1504-S1	3/4/2019	12.10	27.42	827.53	815.43
MW-1504-S1	9/6/2019	13.40	27.50	827.53	814.13
MW-1504-S1	3/4/2020	12.40	27.54	827.53	815.13
MW-1504-S1	3/5/2021	13.93	27.51	827.53	813.60
MW-1504-S1	10/8/2021	13.37	27.40	827.53	814.16
MW-1504-S1	3/1/2022	11.50	27.38	827.53	816.03
MW-1505-S1	3/10/2016	13.02	32.17	828.19	815.17
MW-1505-S1	9/7/2016	13.78	27.57	828.19	814.41
MW-1505-S1	11/16/2016	14.12	NM	828.19	814.07
MW-1505-S1	3/3/2017	12.58	31.85	827.53	814.95
MW-1505-S1	9/6/2017	13.03	32.05	827.53	814.50
MW-1505-S1	3/6/2018	11.80	32.08	827.53	815.73
MW-1505-S1	9/12/2018	11.44	32.00	827.53	816.09
MW-1505-S1	3/4/2019	12.15	32.04	827.53	815.38
MW-1505-S1	9/6/2019	13.72	32.00	827.53	813.81
MW-1505-S1	3/4/2020	12.45	32.12	827.53	815.08

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
MW-1505-S1	3/5/2021	13.96	32.13	827.53	813.57
MW-1505-S1	10/8/2021	13.40	32.10	827.53	814.13
MW-1505-S1	3/1/2022	11.53	32.08	827.53	816.00
MW-1506-S1	3/10/2016	13.32	34.17	827.89	814.57
MW-1506-S1	9/7/2016	14.07	34.27	827.89	813.82
MW-1506-S1	11/16/2016	14.40	NM	827.89	813.49
MW-1506-S1	3/3/2017	12.88	34.03	827.82	814.94
MW-1506-S1	9/6/2017	13.35	34.26	827.82	814.47
MW-1506-S1	3/6/2018	11.80	34.29	827.82	816.02
MW-1506-S1	9/12/2018	11.71	34.25	827.82	816.11
MW-1506-S1	3/4/2019	12.43	34.24	827.82	815.39
MW-1506-S1	9/6/2019	14.00	34.20	827.82	813.82
MW-1506-S1	3/4/2020	12.74	34.30	827.82	815.08
MW-1506-S1	3/5/2021	14.24	34.32	827.82	813.58
MW-1506-S1	10/8/2021	13.70	34.26	827.82	814.12
MW-1506-S1	3/1/2022	11.83	34.25	827.82	815.99
MW-1507-S1	3/10/2016	13.42	33.67	827.77	814.35
MW-1507-S1	9/7/2016	14.17	33.57	827.77	813.60
MW-1507-S1	11/16/2016	14.51	NM	827.77	813.26
MW-1507-S1	3/3/2017	12.97	33.33	827.94	814.97
MW-1507-S1	9/6/2017	13.42	33.56	827.94	814.52
MW-1507-S1	3/6/2018	11.89	33.59	827.94	816.05
MW-1507-S1	9/12/2018	11.82	33.50	827.94	816.12
MW-1507-S1	3/4/2019	12.52	33.53	827.94	815.42
MW-1507-S1	9/6/2019	14.10	33.40	827.94	813.84
MW-1507-S1	3/4/2020	12.82	33.48	827.94	815.12
MW-1507-S1	3/5/2021	14.37	33.40	827.94	813.57
MW-1507-S1	10/8/2021	13.85	33.35	827.94	814.09
MW-1507-S1	3/1/2022	11.91	33.24	827.94	816.03
MW-1508-S1	3/10/2016	14.46	35.21	826.69	812.23
MW-1508-S1	9/7/2016	14.68	34.58	826.69	812.01
MW-1508-S1	11/16/2016	15.04	NM	826.69	811.65
MW-1508-S1	3/3/2017	13.48	34.30	828.48	815.00
MW-1508-S1	9/6/2017	13.95	34.48	828.48	814.53
MW-1508-S1	3/6/2018	12.41	34.49	828.48	816.07
MW-1508-S1	9/12/2018	12.35	34.45	828.48	816.13
MW-1508-S1	9/6/2019	14.60	34.50	828.48	813.88
MW-1508-S1	3/4/2020	13.38	34.55	828.48	815.10
MW-1508-S1	3/5/2021	14.87	34.55	828.48	813.61
MW-1508-S1	10/8/2021	14.29	34.43	828.48	814.19
MW-1508-S1	3/1/2022	12.44	34.43	828.48	816.04
PM-1301-S1	3/10/2016	12.42	24.23	828.92	816.50
PM-1301-S1	9/7/2016	13.23	24.23	828.92	815.69
PM-1301-S1	11/16/2016	14.10	NM	828.92	814.82
PM-1301-S1	3/3/2017	11.98	23.94	826.80	814.82

Table 1
Monitoring Well Groundwater Elevation Data
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Well ID	Date	Depth to Water (feet)	Total Depth (feet)	Top of Casing Elevation* (feet AMSL)	Groundwater Elevation (feet AMSL)
PM-1301-S1	9/6/2017	12.46	24.22	826.80	814.34
PM-1301-S1	3/6/2018	10.98	13.66	826.80	815.82
PM-1301-S1	9/12/2018	10.80	24.10	826.80	816.00
PM-1301-S1	3/4/2019	11.54	24.20	826.80	815.26
PM-1301-S1	9/6/2019	13.10	24.10	826.80	813.70
PM-1301-S1	3/4/2020	11.77	24.20	826.80	815.03
PM-1301-S1	3/5/2021	13.28	24.20	826.80	813.52
PM-1301-S1	10/8/2021	12.85	24.20	826.80	813.95
PM-1301-S1	3/1/2022	12.73	24.20	826.80	814.07

Notes:

* : Monitoring wells re-surveyed March 2017 by John H. Stephens R.L.S, Inc.
 AMSL: Above mean sea level
 NM: Reading not collected

Table 2
Groundwater Analytical Data Summary Screened Against Drinking Water Criteria
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

DRAFT

Location	Date	Sample ID	Sampling Method	Concentration (µg/L)									
				1,1,1-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	Benzene	Chloroform (Trichloromethane)	cis-1,2-Dichloroethene	Toluene	trans-1,2-Dichloroethene	Trichloroethene	Vinyl chloride
Maximum Contaminant Level†				200	24	7	5	80	70	1000	100	5	2
MW-0101-S1U	3/23/2022	MW-0101-S1U (032322)	PDB	< 5.0 U	2.9 J	10.9	< 5.0 U	< 5.0 U	1,970	< 5.0 U	37.8	7,870	72.4 J
MW-0102-S1U	3/23/2022	MW-0102-S1U (032322)	PDB	< 5.0 U	< 5.0 U	7.3	< 5.0 U	< 5.0 U	897	< 5.0 U	108	3,340	12.1 J
MW-0103-S1U	3/23/2022	MW-0103-S1U (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	3.2 J	< 5.0 U	< 5.0 U	6.2	< 2.0 U
MW-0501-S1	3/23/2022	MW-0501-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0501-S2	3/23/2022	MW-0501-S2 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	2.1 J	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0502-S1	3/23/2022	MW-0502-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	1.1 J	< 5.0 U	< 5.0 U	3.0 J	< 2.0 U
MW-0503-S1	3/23/2022	MW-0503-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0503-S2	3/23/2022	MW-0503-S2 (032322)	PDB	< 5.0 U	3.0 J	< 5.0 U	< 5.0 U	< 5.0 U	28.1	< 5.0 U	1.6 J	< 5.0 U	< 2.0 U
MW-0504-S1	3/23/2022	MW-0504-S1 (032322)	PDB	< 25.0 U	< 25.0 U	< 25.0 U	< 25.0 U	< 25.0 U	933	< 25.0 U	121	2,160	15.4
MW-0504-S2	3/23/2022	MW-0504-S2 (032322)	PDB	< 5.0 U	< 5.0 U	1.4 J	< 5.0 U	< 5.0 U	686	< 5.0 U	31.2	< 5.0 U	< 2.0 U
MW-0505-S1	3/23/2022	MW-0505-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	3.0 J	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0505-S2	3/23/2022	MW-0505-S2 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0506-S1	3/23/2022	MW-0506-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	2.1 J	< 5.0 U	1.0 J	< 5.0 U	< 2.0 U
MW-0506-S2	3/23/2022	MW-0506-S2 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	28.0	< 5.0 U	5.4	22.6	< 2.0 U
MW-0507-S1	3/23/2022	MW-0507-S1 (032322)	PDB	25.7	44.6	< 5.0 U	< 5.0 U	< 5.0 U	171	< 5.0 U	2.9 J	3.7 J	< 2.0 U
MW-0509-S1	3/23/2022	MW-0509-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0516-S1	3/23/2022	MW-0516-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0516-S2	3/23/2022	MW-0516-S2 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0517-S1	3/23/2022	FD-1 (032322)-CS	PDB	< 5.0 U	3.3 J	3.8 J	0.94 J	< 5.0 U	984	< 5.0 U	109	4,180 J	3.5 J
MW-0517-S1	3/23/2022	MW-0517-S1 (032322)	PDB	< 50.0 U	< 50.0 U	< 50.0 U	< 50.0 U	< 50.0 UB	989	< 50.0 U	103	6,120 J	< 20.0 U
MW-0602-S1	3/23/2022	MW-0602-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0603-S1	3/23/2022	MW-0603-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0604-S1	3/23/2022	MW-0604-S1 (032322)	PDB	< 5.0 U	1.9 J	2.8 J	< 5.0 U	< 5.0 U	606	< 5.0 U	57.3	1,320	18.4
MW-0604-S2	3/23/2022	MW-0604-S2 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0605-S1	3/23/2022	MW-0605-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	0.70 J	< 5.0 U	< 5.0 U	33.2	< 2.0 U
MW-0605-S2	3/23/2022	MW-0605-S2 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	6.9	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0606-S1	3/23/2022	MW-0606-S1 (032322)	PDB	< 50.0 U	< 50.0 U	< 50.0 U	< 50.0 U	< 50.0 UB	1,040	< 50.0 U	116	2,510	< 20.0 U
MW-0606-S2	3/23/2022	MW-0606-S2 (032322)	PDB	< 50.0 U	< 50.0 U	< 50.0 U	< 50.0 U	< 50.0 UB	784	< 50.0 U	31.7 J	5.2 J	59.4
MW-0607-S1	3/23/2022	MW-0607-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0607-S2	3/23/2022	MW-0607-S2 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	0.48 J
MW-0608-S1	3/23/2022	MW-0608-S1 (032322)	PDB	< 5.0 U	2.8 J	2.2 J	0.37 J	< 5.0 UB	443	< 5.0 U	67.6	< 5.0 U	3.3
MW-0608-S2	3/23/2022	MW-0608-S2 (032322)	PDB	< 50.0 U	< 50.0 U	< 50.0 U	< 50.0 U	< 50.0 UB	1,010	< 50.0 U	104	5.1 J	3.1 J
MW-0609-S1	3/23/2022	MW-0609-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	26.5	< 5.0 U	< 5.0 U	0.39 J	5.0
MW-0609-S2	3/23/2022	MW-0609-S2 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	200	< 5.0 U	21.8	< 5.0 U	11.8
MW-0610-S1	3/23/2022	MW-0610-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0611-S1	3/23/2022	MW-0611-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	0.96 J	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0612-S1	3/23/2022	MW-0612-S1 (032322)	PDB	< 25.0 U	< 25.0 U	< 25.0 U	< 25.0 U	< 25.0 UB	259	< 25.0 U	45.1	3,070	12.9
MW-0612-S2	3/23/2022	MW-0612-S2 (032322)	PDB	< 5.0 U	< 5.0 U	4.4 J	< 5.0 U	< 5.0 UB	1,880	< 5.0 U	132	142	42.9
MW-0613-S1	3/23/2022	MW-0613-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0614-S2	3/23/2022	MW-0614-S2 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0617-S1	3/23/2022	MW-0617-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	2.5 J	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0617-S2	3/23/2022	MW-0617-S2 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	4.2 J	< 5.0 U	< 5.0 U	< 5.0 U	4.3
MW-0618-S1	3/23/2022	MW-0618-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	1.4 J	< 5.0 U	0.98 J	< 5.0 U	< 2.0 U
MW-0619-S1	3/23/2022	MW-0619-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	21.3	< 5.0 U	1.0 J	9.0	0.89 J
MW-0620-S1	3/23/2022	MW-0620-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	1.8 J	< 5.0 U	< 5.0 U	1,350	< 2.0 U
MW-0621-S1	3/23/2022	MW-0621-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	88.0	< 5.0 U	7.1	184	< 2.0 U
MW-0622-S1	3/23/2022	FD-2 (032322)	PDB	< 250 U	< 250 U	< 250 U	< 250 U	< 250 UB	1,870	< 250 U	21.1 J	19,000	< 100 U
MW-0622-S1	3/23/2022	MW-0622-S1 (032322)	PDB	< 125 U	< 125 U	11.5 J	< 125 U	< 125 UB	1,760	< 125 U	23.1 J	20,900	< 50.0 U
MW-0622-S2	3/23/2022	FD-3 (032322)-CS	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0622-S2	3/23/2022	MW-0622-S2 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0623-S1	3/23/2022	MW-0623-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0704-S1	3/23/2022	MW-0704-S1 (032322)	PDB	< 5.0 U	< 5.0 U	2.3 J	< 5.0 U	< 5.0 UB	539	< 5.0 U	84.3	2,250	2.5
MW-0705-S1	3/23/2022	MW-0705-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 UB	68.5	< 5.0 U	9.9	76.2	4.4
MW-1501-S1	3/23/2022	MW-1501-S1 (032322)	PDB	< 5.0 U	< 5.0 U	0.67 J	< 5.0 U	< 5.0 U	250	< 5.0 U	25.1	322	< 2.0 U
MW-1502-S1	3/23/2022	MW-1502-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	12.1	< 5.0 U	< 5.0 U	< 5.0 U	3.0
MW-1504-S1	3/23/2022	MW-1504-S1 (032322)	PDB	< 50.0 U	< 50.0 U	< 50.0 U	< 50.0 U	< 50.0 UB	1,540	< 50.0 U	13.3 J	3,820	88.6
MW-1507-S1	3/23/2022	MW-1507-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	89.6	< 5.0 U	7.0	413	< 2.0 U

Notes:

Only constituents of concern detected one or more times during the groundwater monitoring event are presented.

‡ The data are screened against United States Environmental Protection Agency (USEPA) Drinking Water Screening Criteria (Maximum Contaminant Levels [MCLs])

* No MCL is established for 1,1-dichloroethane; as such, the Indiana Department of Environmental Management Remediation Closure Guide (RCG) Tap Water Criteria were used for screening purposes

SHADED Concentrations highlighted gray exceed the screening criteria

µg/L: micrograms per liter

J: The compound was positively identified; however, the associated numerical value is an estimated concentration only

PDB: Passive diffusion bag

U: The compound was analyzed for but not detected. The associated value is the compound quantitation limit

UB: Compound considered non-detect at the listed value due to associated blank contamination

Table 3
Off-Site Groundwater Analytical Data Summary Screened Against Groundwater Vapor Intrusion Criteria
RACER Trust Former GM Delco Plant 5
Kokomo, Indiana

Location	Date	Sample ID	Sampling Method	Concentration (µg/L)				
				1,1-Dichloroethene	cis-1,2-Dichloroethene	trans-1,2-Dichloroethene	Trichloroethene	Vinyl chloride
Site specific Groundwater Vapor Intrusion Screening Level-Residential†				55,120	41,260	44,270	1,540	540
Site specific Groundwater Vapor Intrusion Screening Level-Commercial/Industrial†				77,160	57,760	61,980	2,150	1,810
MW-0516-S1	3/23/2022	MW-0516-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0602-S1	3/23/2022	MW-0602-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0603-S1	3/23/2022	MW-0603-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0606-S1	3/23/2022	MW-0606-S1 (032322)	PDB	< 50.0 U	1,040	116	2,510	< 20.0 U
MW-0607-S1	3/23/2022	MW-0607-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0608-S1	3/23/2022	MW-0608-S1 (032322)	PDB	2.2 J	443	67.6	< 5.0 U	3.3
MW-0609-S1	3/23/2022	MW-0609-S1 (032322)	PDB	< 5.0 U	26.5	< 5.0 U	0.39 J	5.0
MW-0610-S1	3/23/2022	MW-0610-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0611-S1	3/23/2022	MW-0611-S1 (032322)	PDB	< 5.0 U	0.96 J	< 5.0 U	< 5.0 U	< 2.0 U
MW-0612-S1	3/23/2022	MW-0612-S1 (032322)	PDB	< 25.0 U	259	45.1	3,070	12.9
MW-0613-S1	3/23/2022	MW-0613-S1 (032322)	PDB	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 2.0 U
MW-0617-S1	3/23/2022	MW-0617-S1 (032322)	PDB	< 5.0 U	2.5 J	< 5.0 U	< 5.0 U	< 2.0 U
MW-0618-S1	3/23/2022	MW-0618-S1 (032322)	PDB	< 5.0 U	1.4 J	0.98 J	< 5.0 U	< 2.0 U
MW-0704-S1	3/23/2022	MW-0704-S1 (032322)	PDB	2.3 J	539	84.3	2,250	2.5
MW-0705-S1	3/23/2022	MW-0705-S1 (032322)	PDB	< 5.0 U	68.5	9.9	76.2	4.4

Notes:

Only vapor intrusion constituents of concern detected one or more times during the groundwater monitoring event are presented.

† The data are screened against site-specific Groundwater Vapor Intrusion Screening Criteria for residential and commercial/industrial values

BOLD Results exceed the residential screening criteria

SHADED Results exceed the commercial/industrial screening criteria

µg/L Results are reported in micrograms per liter

D: Concentration is based on a diluted sample analysis


E: Analyte concentration exceeded the calibration range. The reported result is estimated.


J: The compound was positively identified; however, the associated numerical value is an estimated concentration only

PDB: Passive Diffusion Bag Sampling Technique

U: The compound was analyzed for but not detected. The associated value is the compound quantitation limit

Figures

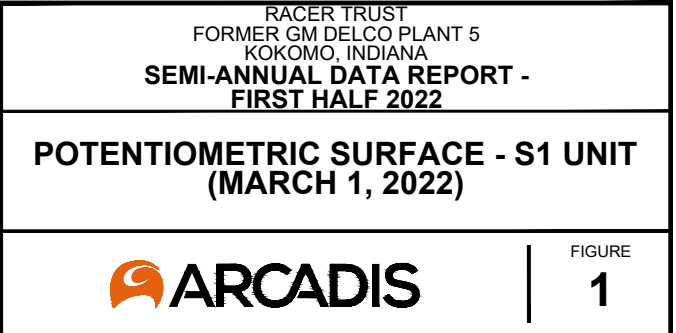

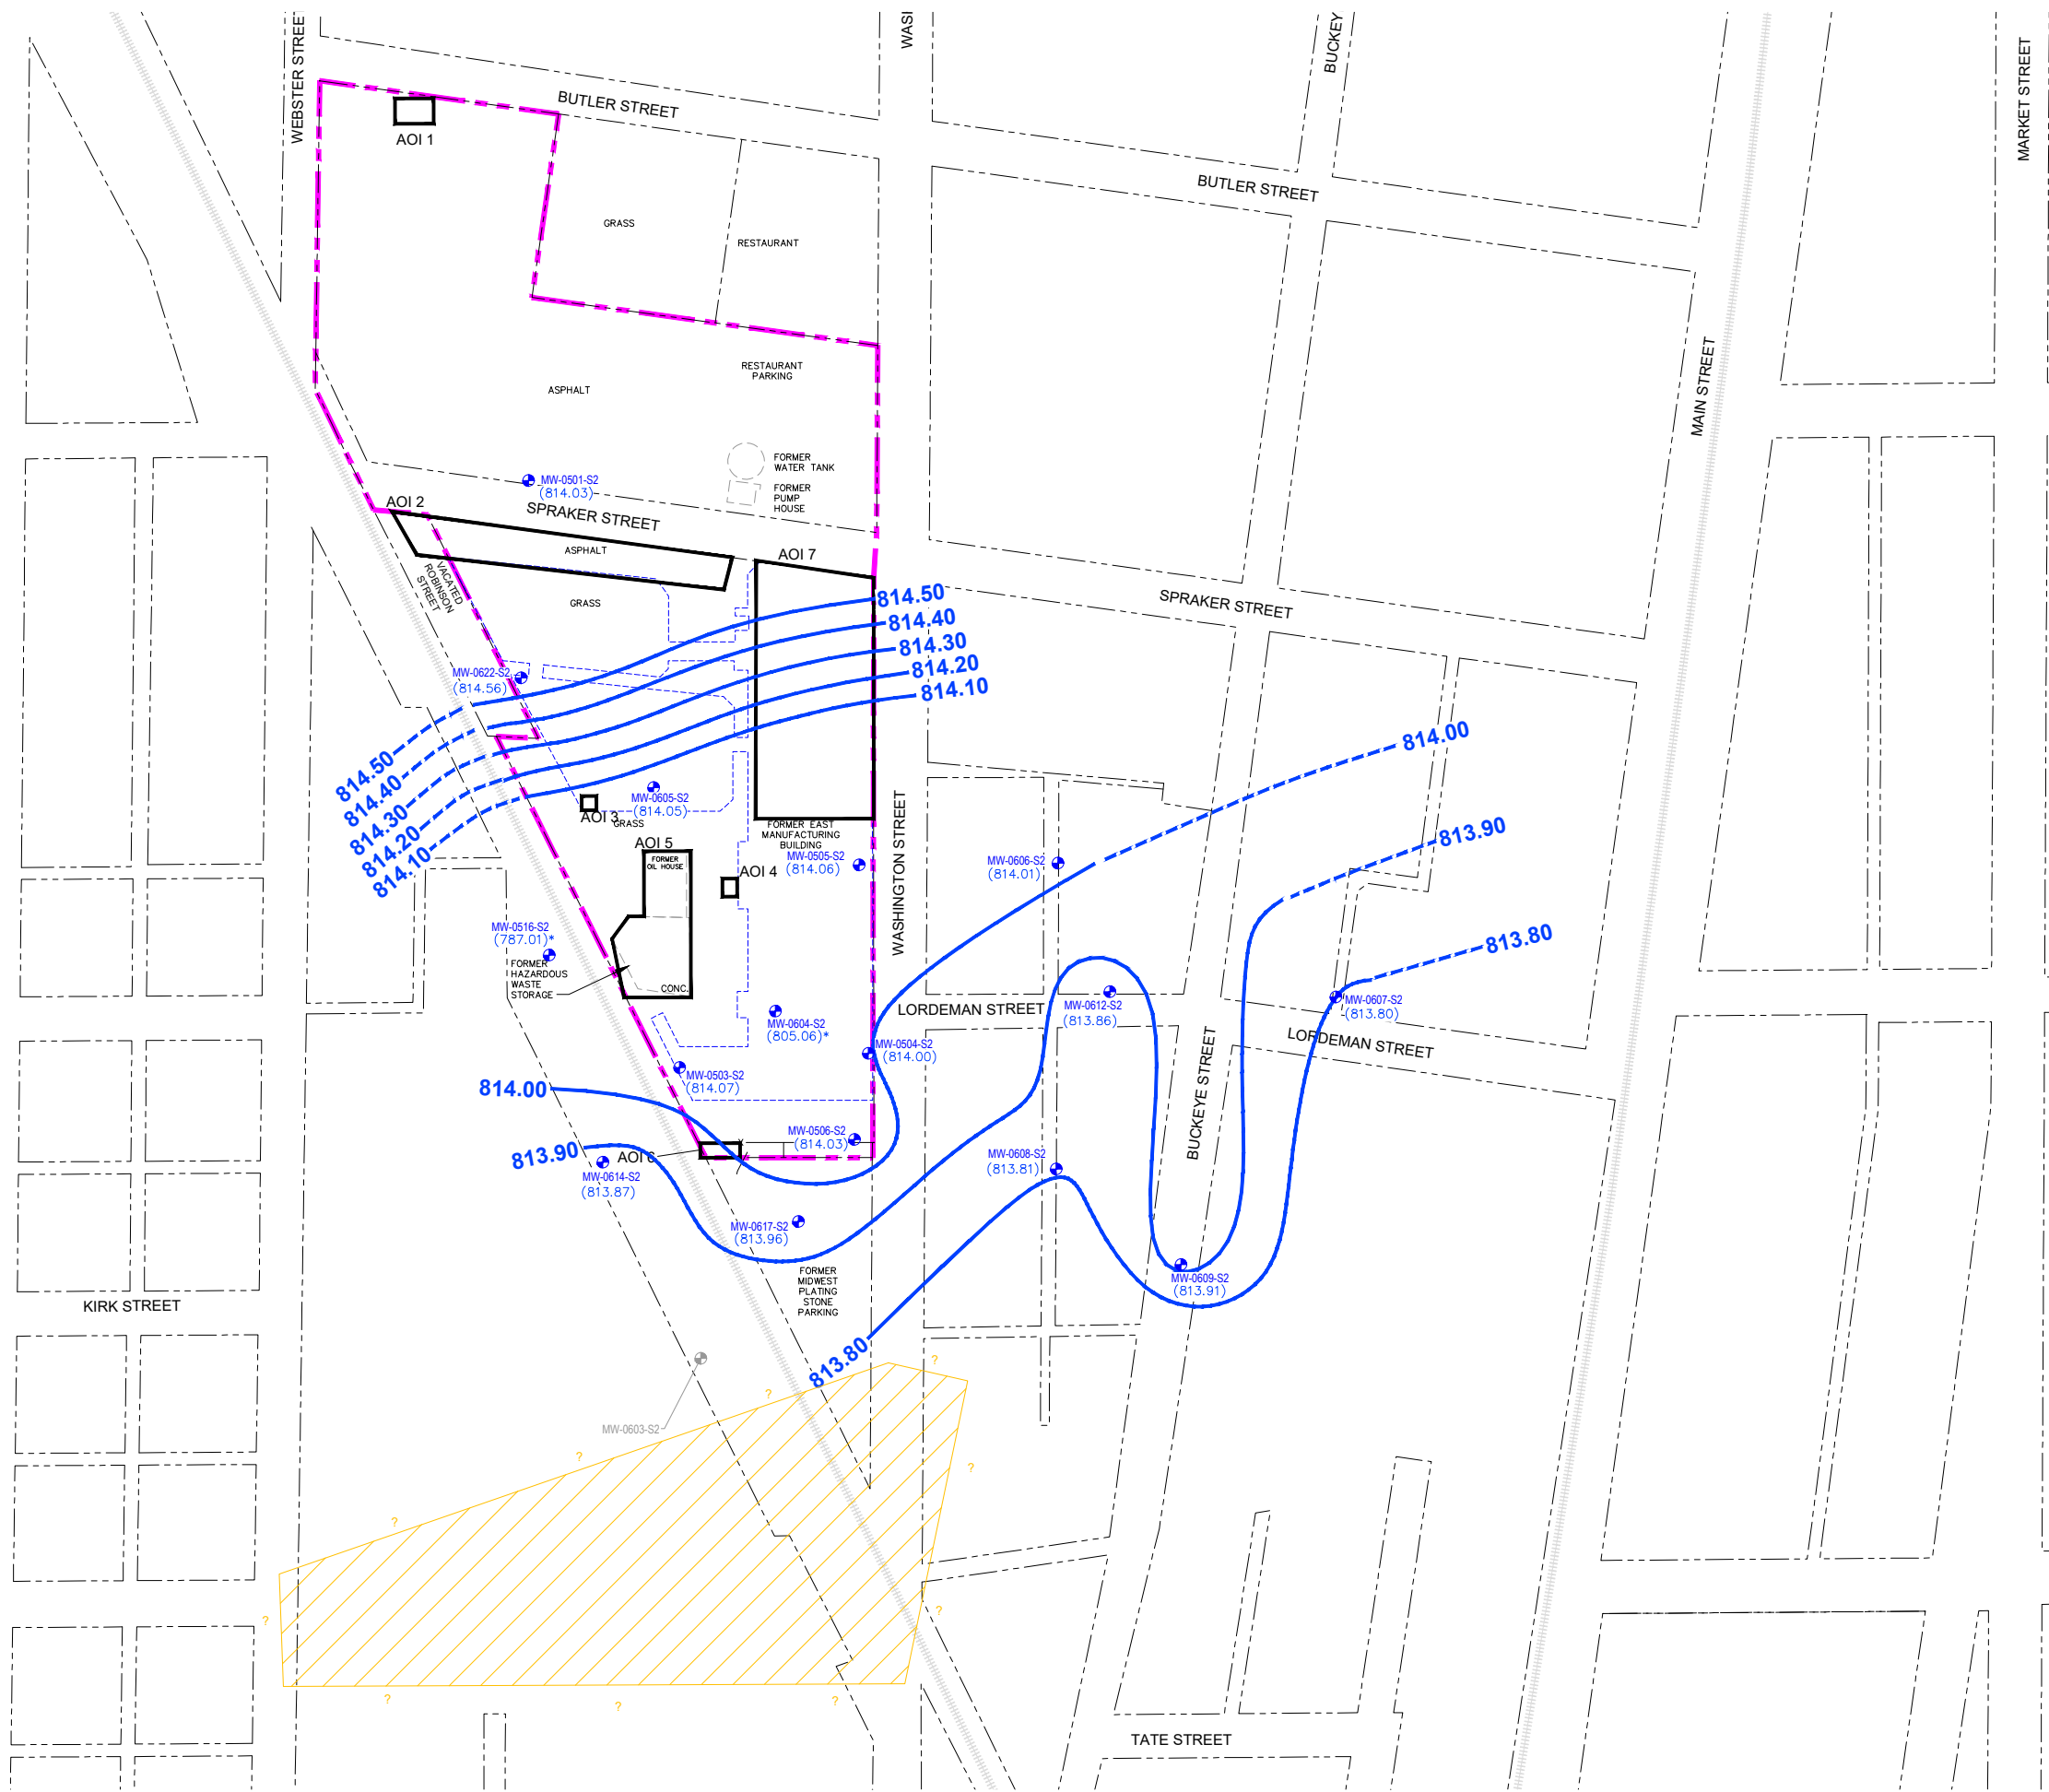


- LEGEND
- MW-0608-S2 MONITORING WELL SCREENED IN S2 UNIT
 - MW-0603-S2 ABANDONED MONITORING WELL
 - AREA OF INTEREST (AOI)
 - PROPERTY BOUNDARY
 - DENOTES AREA WHERE S2 UNIT IS NOT PRESENT
 - (810.50) GROUNDWATER ELEVATION (FEET ABOVE MEAN SEA LEVEL)
 - (805.06)* GROUNDWATER ELEVATION NOT USED TO GENERATE CONTOURS
 - GROUNDWATER CONTOUR (DASHED WHERE INFERRED)

RACER TRUST
FORMER GM DELCO PLANT 5
KOKOMO, INDIANA
SEMI-ANNUAL DATA REPORT -
FIRST HALF 2022

POTENTIOMETRIC SURFACE - S2 UNIT
(MARCH 1, 2022)



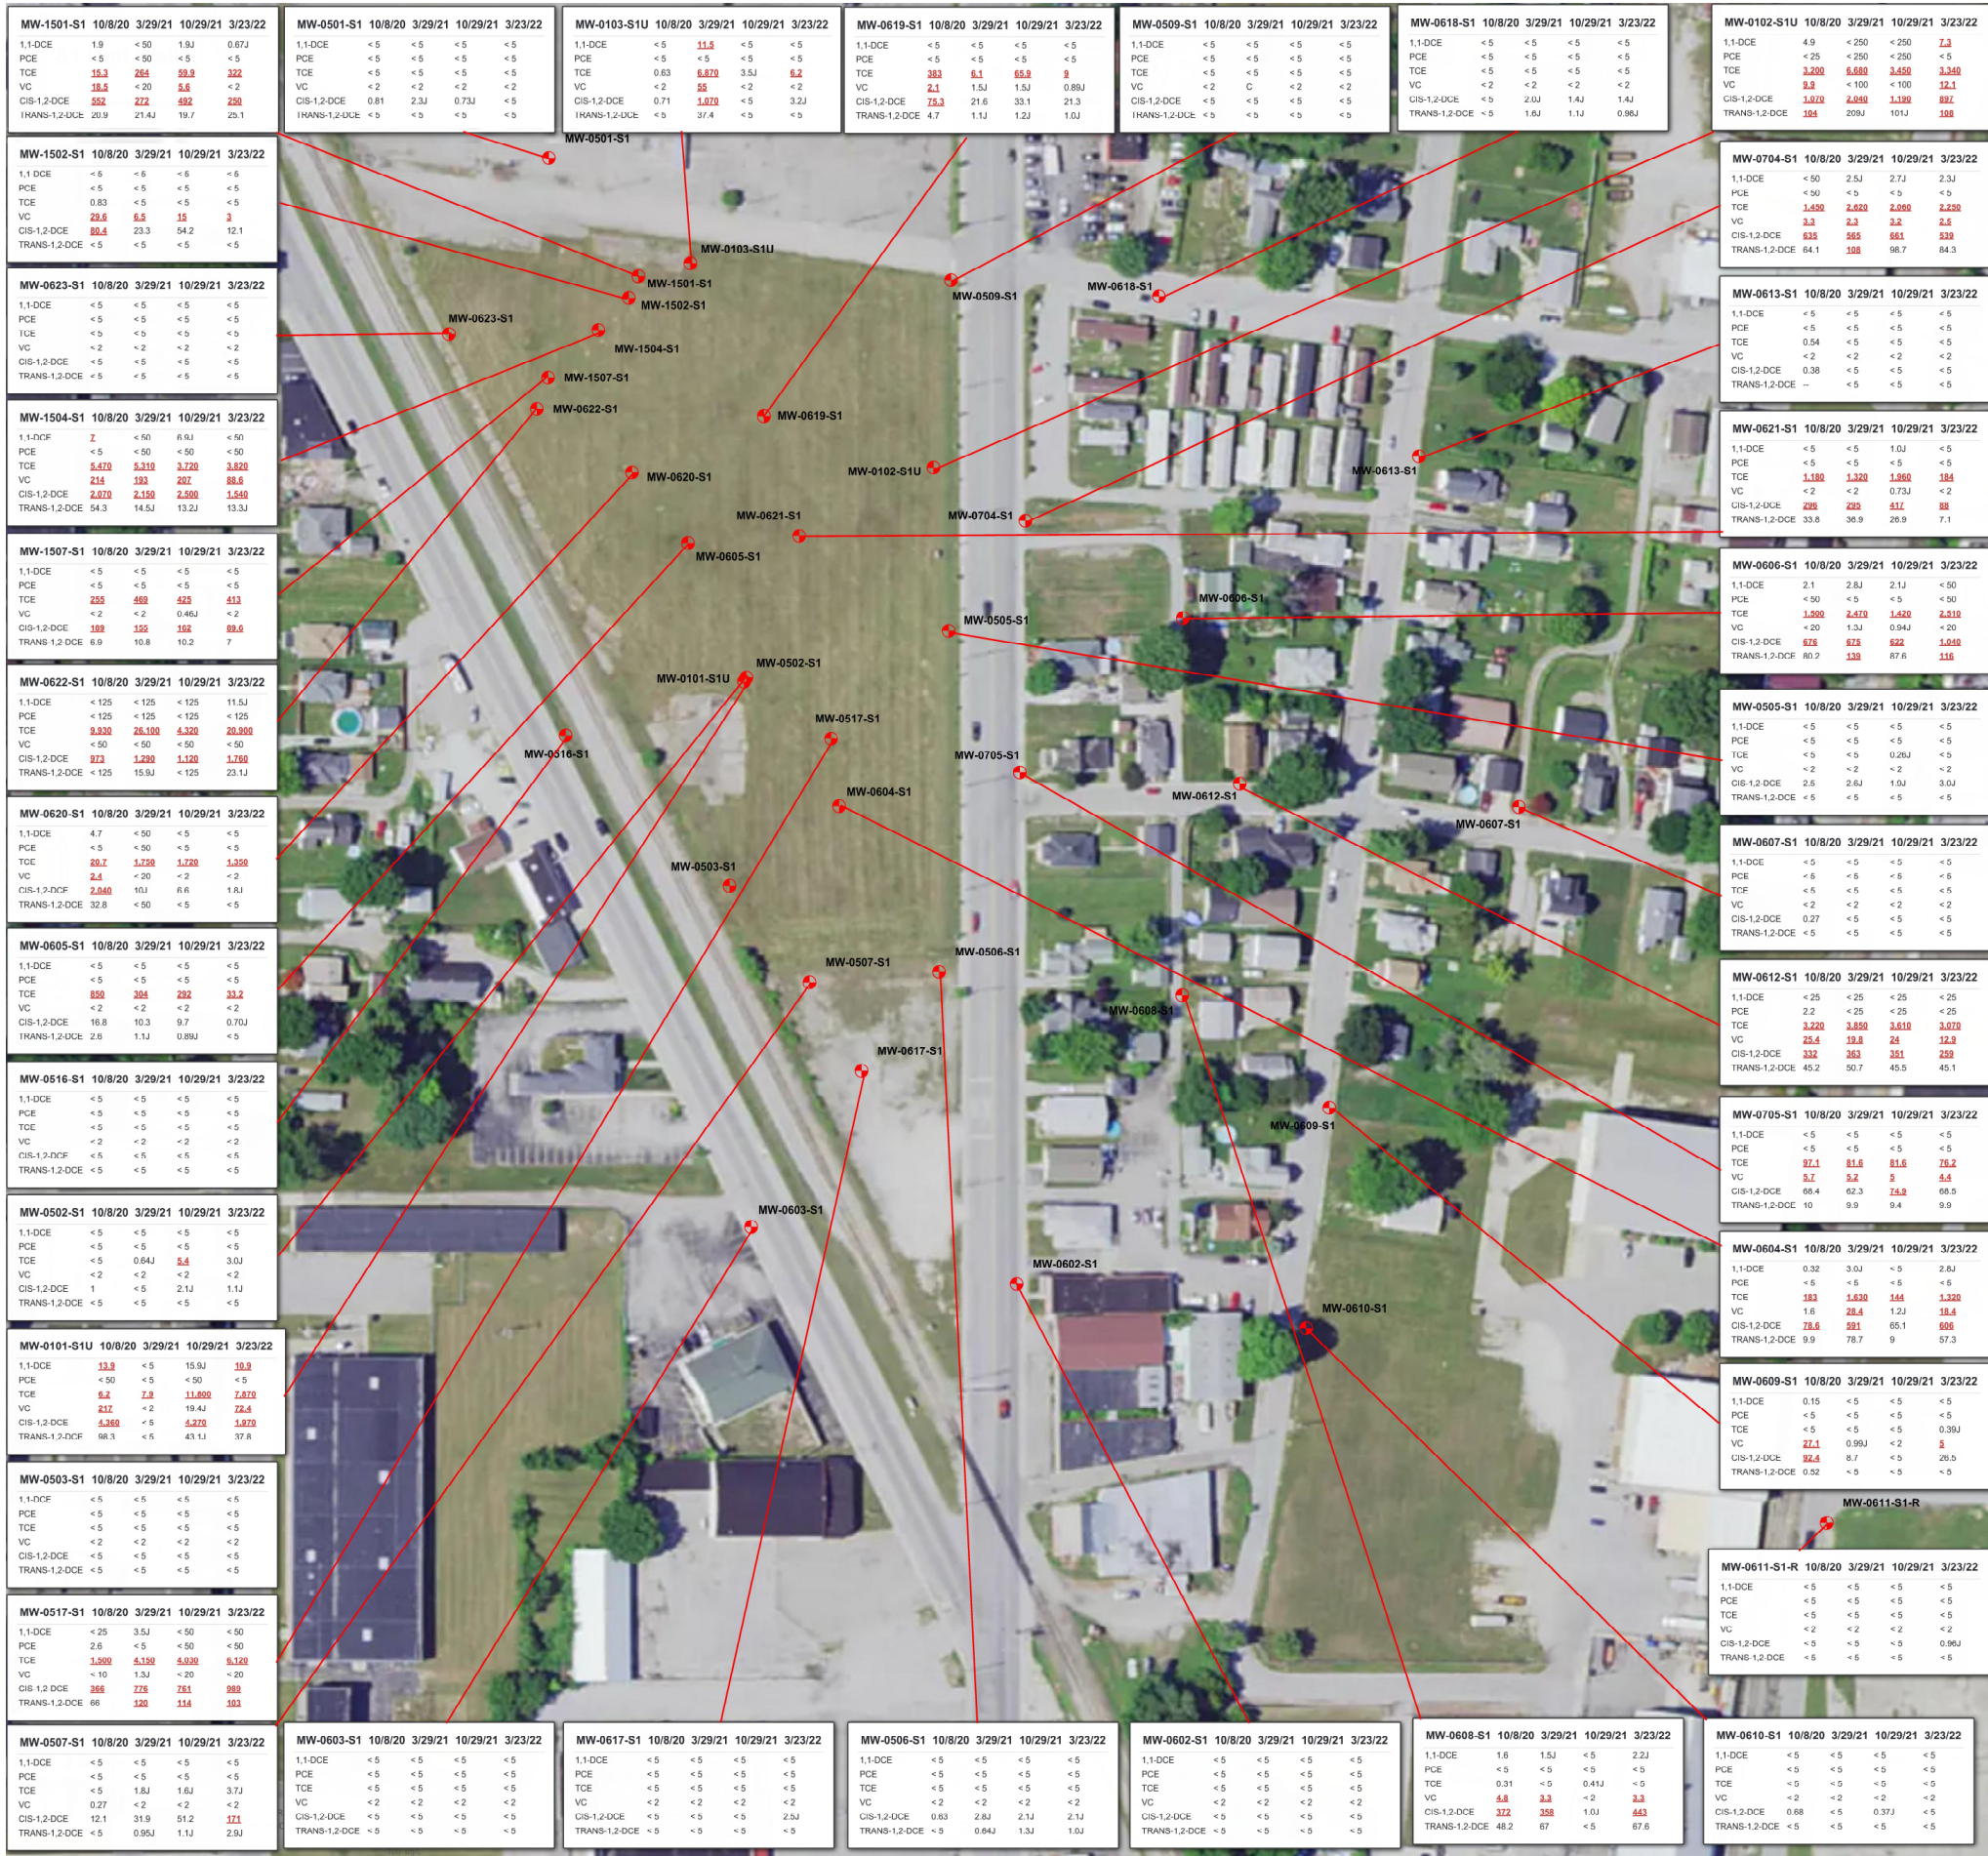


LEGEND:

USEPA Maximum Contaminant Level (MCL) Groundwater Screening Level	
Constituent of Concern	MCL
1,1-Dichloroethene	7
Tetrachloroethene	5
Trichloroethene	5
Vinyl Chloride	2
Cis-1,2-Dichloroethene	70
Trans-1,2-Dichloroethene	100

NOTES:

- RESULTS ARE REPORTED IN MICROGRAMS PER LITER (µg/L)
- THE DATA ARE SCREENED AGAINST UNITED STATES ENVIRONMENTAL PROTECTION AGENCY (USEPA) DRINKING WATER CRITERIA (MCLs)
- CONSTITUENTS OF CONCERN ARE LIMITED TO THOSE THAT HAVE BEEN DETECTED ONE OR MORE TIMES
- RED VALUES EXCEED THE SCREENING CRITERIA
- < - THE COMPOUND WAS ANALYZED FOR BUT NOT DETECTED. THE ASSOCIATED VALUE IS THE COMPOUND QUANTITATION LIMIT
- J - THE COMPOUND WAS POSITIVELY IDENTIFIED; HOWEVER, THE ASSOCIATED NUMERICAL VALUE IS AN ESTIMATED CONCENTRATION ONLY

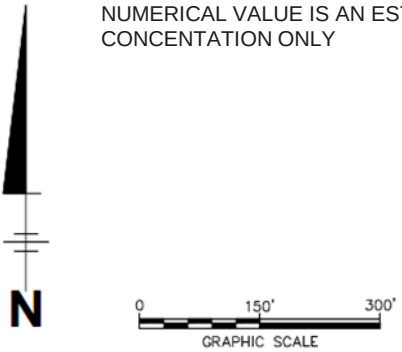


RACER TRUST
FORMER GM DELCO PLANT 5
KOKOMO, INDIANA
SEMI-ANNUAL DATA REPORT – FIRST HALF 2022

GROUNDWATER VOLATILE ORGANIC
COMPOUND ANALYTICAL RESULTS
SCREENED WITH MCLS – S1 UNIT



FIGURE
3A

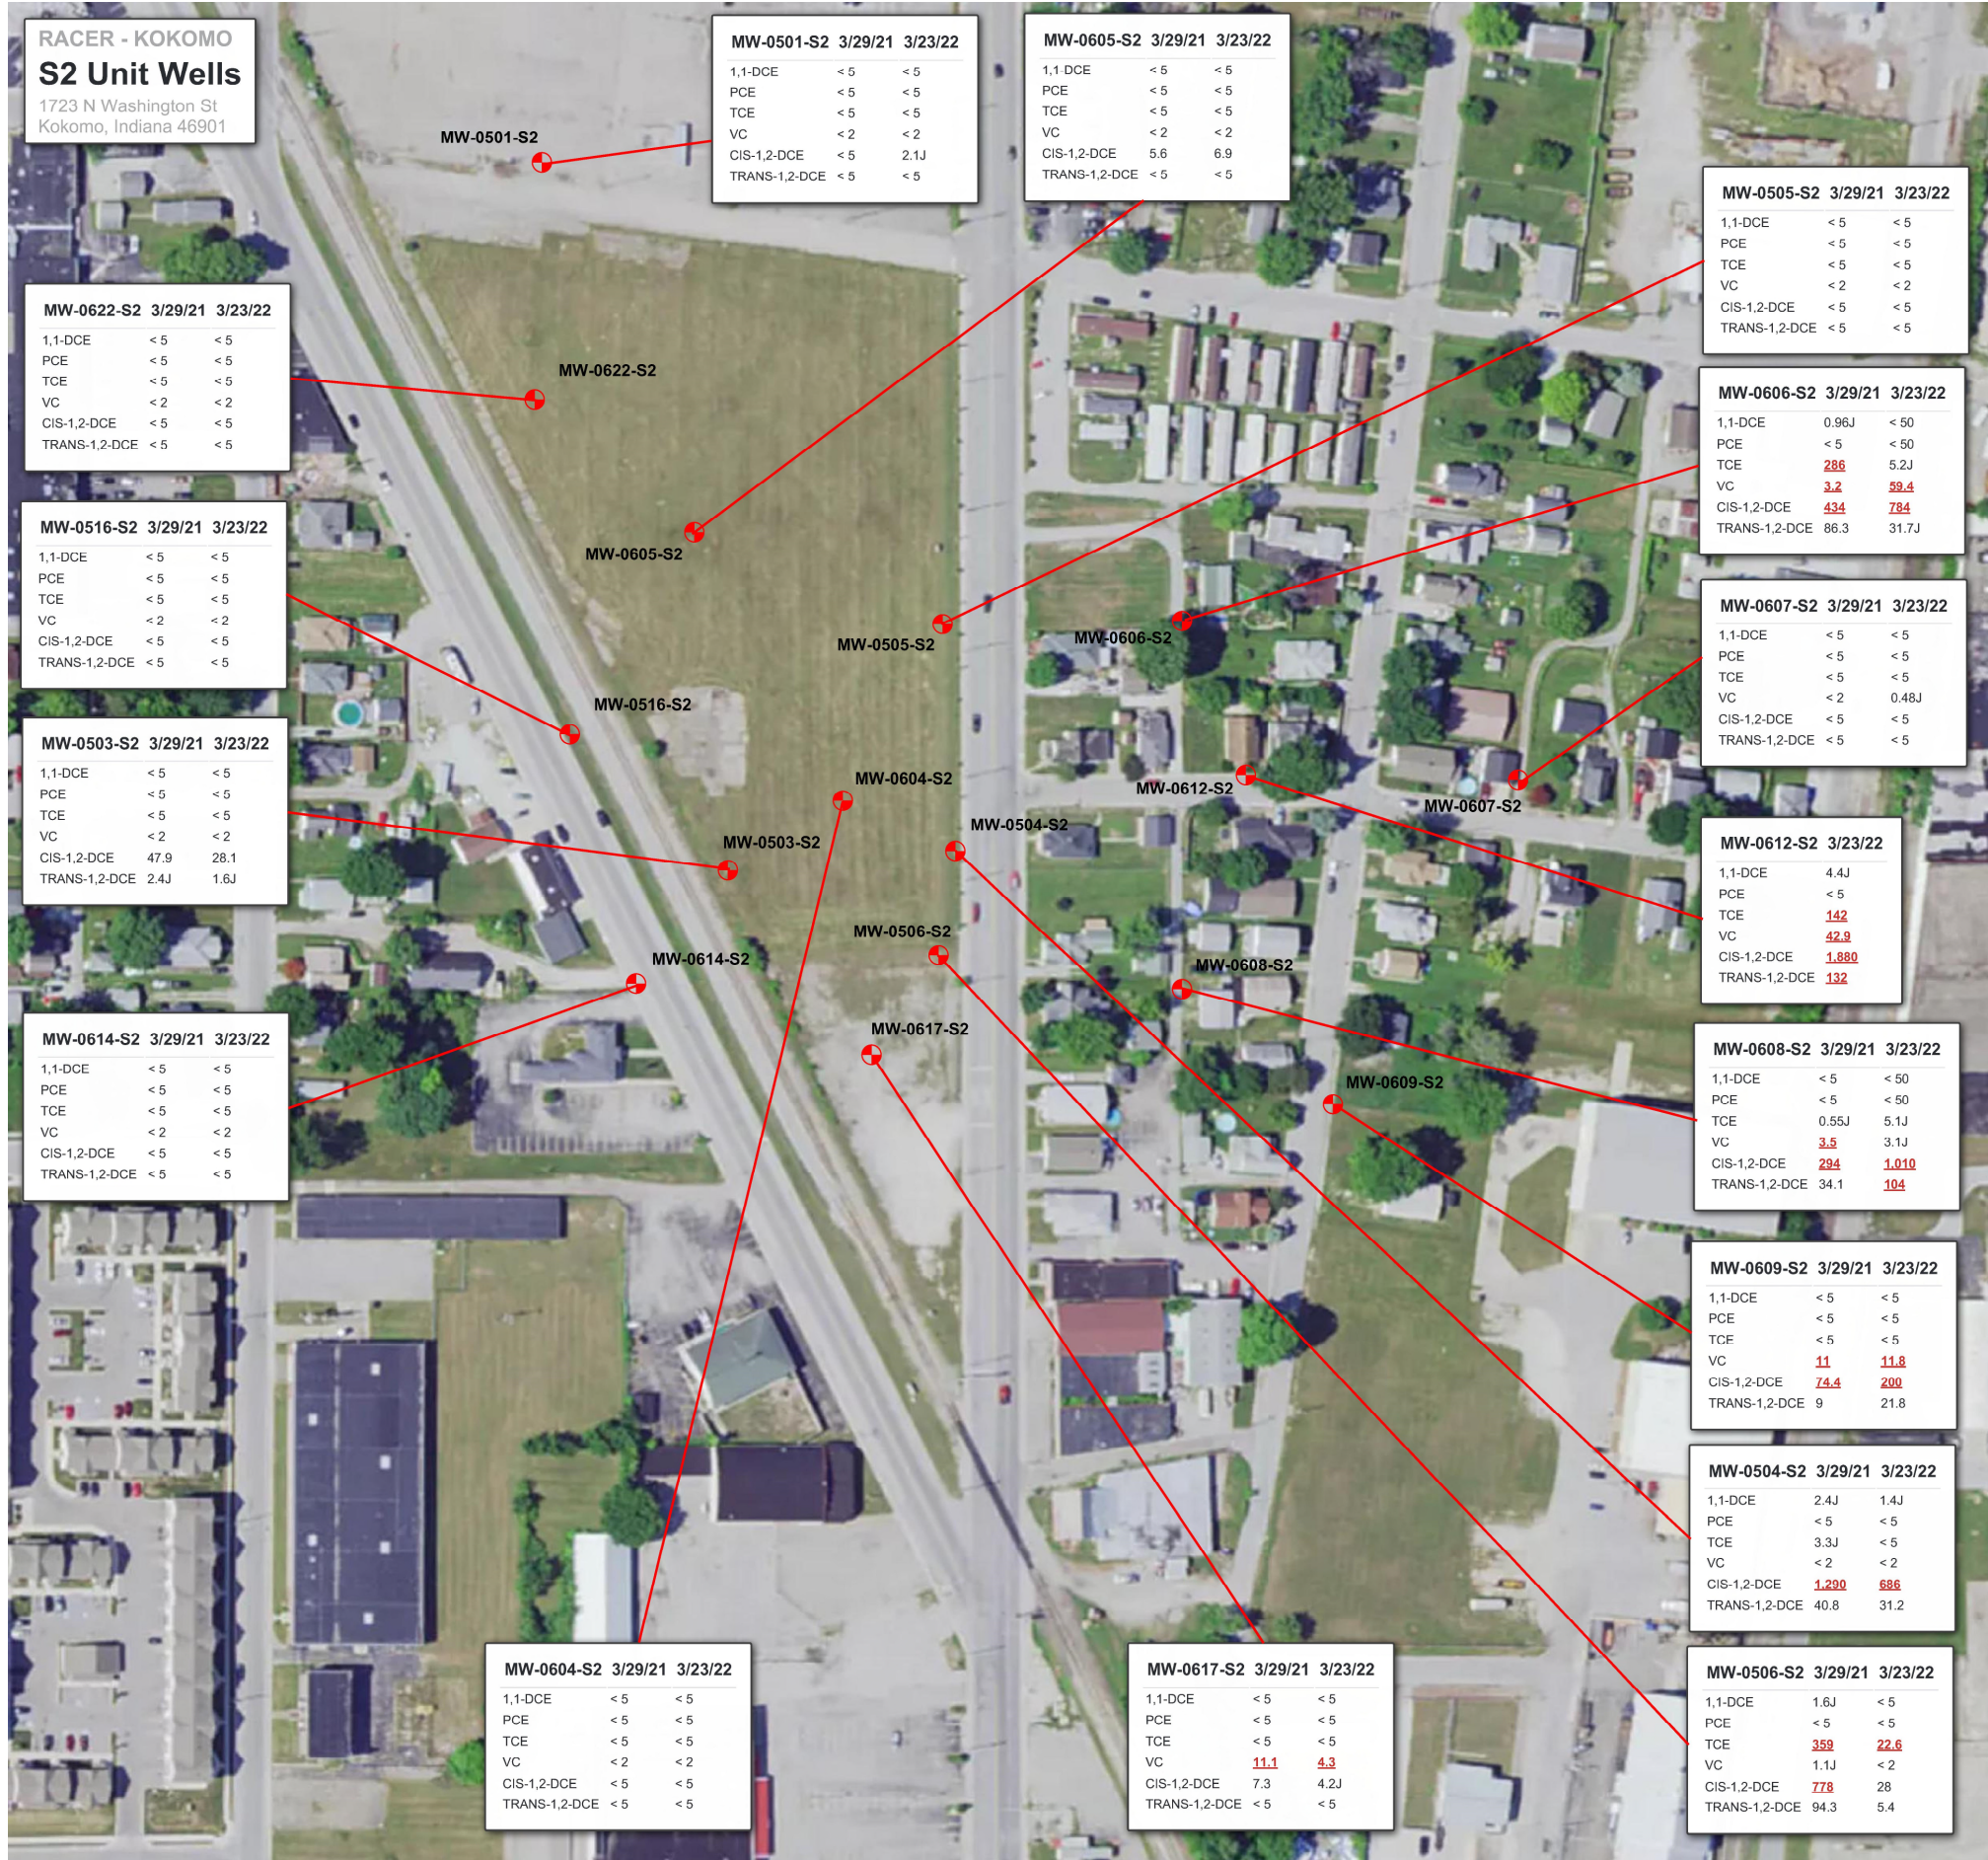


MONITORING WELL SCREENED IN S2 UNIT

USEPA Maximum Contaminant Level (MCL) Groundwater Screening Level	
Constituent of Concern	MCL
1,1-Dichloroethene	7
Tetrachloroethene	5
Trichloroethene	5
Vinyl Chloride	2
Cis-1,2-Dichloroethene	70
Trans-1,2-Dichloroethene	100

NOTES:

- RESULTS ARE REPORTED IN MICROGRAMS PER LITER (µg/L)
- THE DATA ARE SCREENED AGAINST UNITED STATES ENVIRONMENTAL PROTECTION AGENCY (USEPA) DRINKING WATER CRITERIA (MCLs)
- CONSTITUENTS OF CONCERN ARE LIMITED TO THOSE THAT HAVE BEEN DETECTED ONE OR MORE TIMES
- RED VALUES EXCEED THE SCREENING CRITERIA
- < - THE COMPOUND WAS ANALYZED FOR BUT NOT DETECTED. THE ASSOCIATED VALUE IS THE COMPOUND QUANTITATION LIMIT
- J - THE COMPOUND WAS POSITIVELY IDENTIFIED; HOWEVER, THE ASSOCIATED NUMERICAL VALUE IS AN ESTIMATED CONCENTRATION ONLY

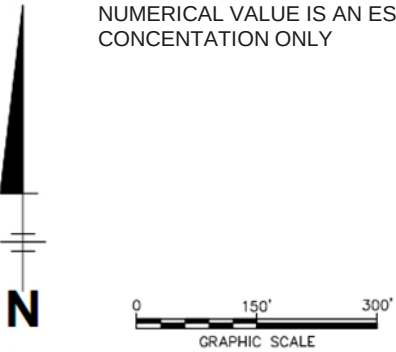

RACER TRUST
FORMER GM DELCO PLANT 5
KOKOMO, INDIANA
SEMI-ANNUAL DATA REPORT – FIRST HALF 2022

GROUNDWATER VOLATILE ORGANIC
COMPOUND ANALYTICAL RESULTS
SCREENED WITH MCLS – S2 UNIT



C:\Users\landia\OneDrive\Documents\Projects\TCE\TCE-03-23-22.dwg LAYOUT: 4 SAVED: 5/16/2022 10:06 AM ACADVER: 24.1S (LMS TECH) PAGES: 1 OF 1 PLOT: 5/17/2022 9:01 AM BY: ROBTAILLE, BEVERLY



LEGEND

MW-0603-S1 ● MONITORING WELL SCREENED IN S1 UNIT

AREA OF INTEREST (AOI)

PROPERTY BOUNDARY


FORMER BUILDING

TRICHLOROETHYLENE (TCE)
CONCENTRATION IN MICROGRAMS PER LITER (µg/L)

(6.2)

ISOCONCENTRATION CONTOUR IN µg/L

- NOTES
- * - MW-0502-S1, MW-0505-S1, AND MW-1502-S1 WERE NOT USED FOR CONTOURING.
 - J - ESTIMATED CONCENTRATION.



RACER TRUST
FORMER GM DELCO PLANT 5
KOKOMO, INDIANA
SEMI-ANNUAL DATA REPORT -
FIRST HALF 2022

**TCE GROUNDWATER CONCENTRATION
CONTOURS - S1 UNIT
(MARCH 23, 2022)**

FIGURE
4

RACER - KOKOMO
Offsite Wells
1723 N Washington St
Kokomo, Indiana 46901

MW-0704-S1

	10/8/20	3/29/21	10/29/21	3/23/22
1,1-DCE	< 50	2.5J	2.7J	2.3J
PCE	< 50	< 5	< 5	< 5
TCE	1,450	2,620	2,060	2,250
VC	3.3	2.3	3.2	2.5
CIS-1,2-DCE	635	565	661	539
TRANS-1,2-DCE	64.1	108	98.7	84.3

MW-0612-S1

	10/8/20	3/29/21	10/29/21	3/23/22
1,1-DCE	< 25	< 25	< 25	< 25
PCE	2.2	< 25	< 25	< 25
TCE	3,220	3,850	3,610	3,070
VC	25.4	19.8	24	12.9
CIS-1,2-DCE	332	363	351	259
TRANS-1,2-DCE	45.2	50.7	45.5	45.1

MW-0613-S1

	10/8/20	3/29/21	10/29/21	3/23/22
1,1-DCE	< 5	< 5	< 5	< 5
PCE	< 5	< 5	< 5	< 5
TCE	0.54	< 5	< 5	< 5
VC	< 2	< 2	< 2	< 2
CIS-1,2-DCE	0.38	< 5	< 5	< 5
TRANS-1,2-DCE	--	< 5	< 5	< 5

MW-0607-S1

	10/8/20	3/29/21	10/29/21	3/23/22
1,1-DCE	< 5	< 5	< 5	< 5
PCE	< 5	< 5	< 5	< 5
TCE	< 5	< 5	< 5	< 5
VC	< 2	< 2	< 2	< 2
CIS-1,2-DCE	0.27	< 5	< 5	< 5
TRANS-1,2-DCE	< 5	< 5	< 5	< 5

MW-0705-S1

	10/8/20	3/29/21	10/29/21	3/23/22
1,1-DCE	< 5	< 5	< 5	< 5
PCE	< 5	< 5	< 5	< 5
TCE	97.1	81.6	81.6	76.2
VC	5.7	5.2	5	4.4
CIS-1,2-DCE	68.4	62.3	74.9	68.5
TRANS-1,2-DCE	10	9.9	9.4	9.9

MW-0516-S1

	10/8/20	3/29/21	10/29/21	3/23/22
1,1-DCE	< 5	< 5	< 5	< 5
PCE	< 5	< 5	< 5	< 5
TCE	< 5	< 5	< 5	< 5
VC	< 2	< 2	< 2	< 2
CIS-1,2-DCE	< 5	< 5	< 5	< 5
TRANS-1,2-DCE	< 5	< 5	< 5	< 5

MW-0506-S1

	10/8/20	3/29/21	10/29/21	3/23/22
1,1-DCE	< 5	< 5	< 5	< 5
PCE	< 5	< 5	< 5	< 5
TCE	< 5	< 5	< 5	< 5
VC	< 2	< 2	< 2	< 2
CIS-1,2-DCE	0.63	2.8J	2.1J	2.1J
TRANS-1,2-DCE	< 5	0.64J	1.3J	1.0J

MW-0507-S1

	10/8/20	3/29/21	10/29/21	3/23/22
1,1-DCE	< 5	< 5	< 5	< 5
PCE	< 5	< 5	< 5	< 5
TCE	< 5	1.8J	1.6J	3.7J
VC	0.27	< 2	< 2	< 2
CIS-1,2-DCE	12.1	31.9	51.2	171
TRANS-1,2-DCE	< 5	0.95J	1.1J	2.9J

MW-0617-S1

	10/8/20	3/29/21	10/29/21	3/23/22
1,1-DCE	< 5	< 5	< 5	< 5
PCE	< 5	< 5	< 5	< 5
TCE	< 5	< 5	< 5	< 5
VC	< 2	< 2	< 2	< 2
CIS-1,2-DCE	< 5	< 5	< 5	2.5J
TRANS-1,2-DCE	< 5	< 5	< 5	< 5

MW-0603-S1


	10/8/20	3/29/21	10/29/21	3/23/22
1,1-DCE	< 5	< 5	< 5	< 5
PCE	< 5	< 5	< 5	< 5
TCE	< 5	< 5	< 5	< 5
VC	< 2	< 2	< 2	< 2
CIS-1,2-DCE	< 5	< 5	< 5	< 5
TRANS-1,2-DCE	< 5	< 5	< 5	< 5

MW-0602-S1

	10/8/20	3/29/21	10/29/21	3/23/22
--	---------	---------	----------	---------


Site Specific Residential Vapor Intrusion Screening Criteria	
Constituent of Concern	MCL
1,1-Dichloroethene	55,120
Tetrachloroethene	23,430
Trichloroethene	1,540
Vinyl Chloride	540
Cis-1,2-Dichloroethene	41,260
Trans-1,2-Dichloroethene	44,270

1. RESULTS ARE REPORTED IN MICROGRAMS PER LITER ($\mu\text{g/L}$)
2. THE DATA ARE SCREENED AGAINST SITE SPECIFIC RESIDENTIAL VAPOR INTRUSION CRITERIA
3. CONSTITUENTS OF CONCERN ARE LIMITED TO THOSE THAT HAVE BEEN DETECTED ONE OR MORE TIMES
4. RED VALUES EXCEED THE SCREENING CRITERIA
5. < - THE COMPOUND WAS ANALYZED FOR BUT NOT DETECTED. THE ASSOCIATED VALUE IS THE COMPOUND QUANTITATION LIMIT
6. J – THE COMPOUND WAS POSITIVELY IDENTIFIED; HOWEVER, THE ASSOCIATED NUMERICAL VALUE IS AN ESTIMATED CONCENTRATION ONLY

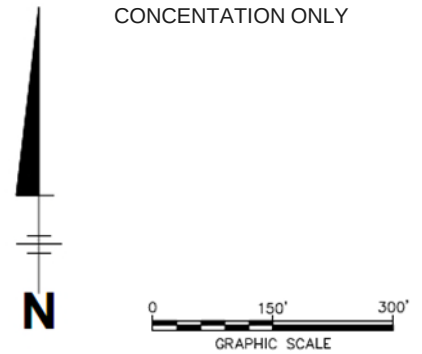

RACER TRUST
FORMER GM DELCO PLANT 5
KOKOMO, INDIANA
SEMI-ANNUAL DATA REPORT – FIRST HALF 2022

OFF-SITE GROUNDWATER VOLATILE ORGANIC COMPOUND ANALYTICAL RESULTS SCREENED WITH RESIDENTIAL GROUNDWATER VAPOR INTRUSION CRITERIA

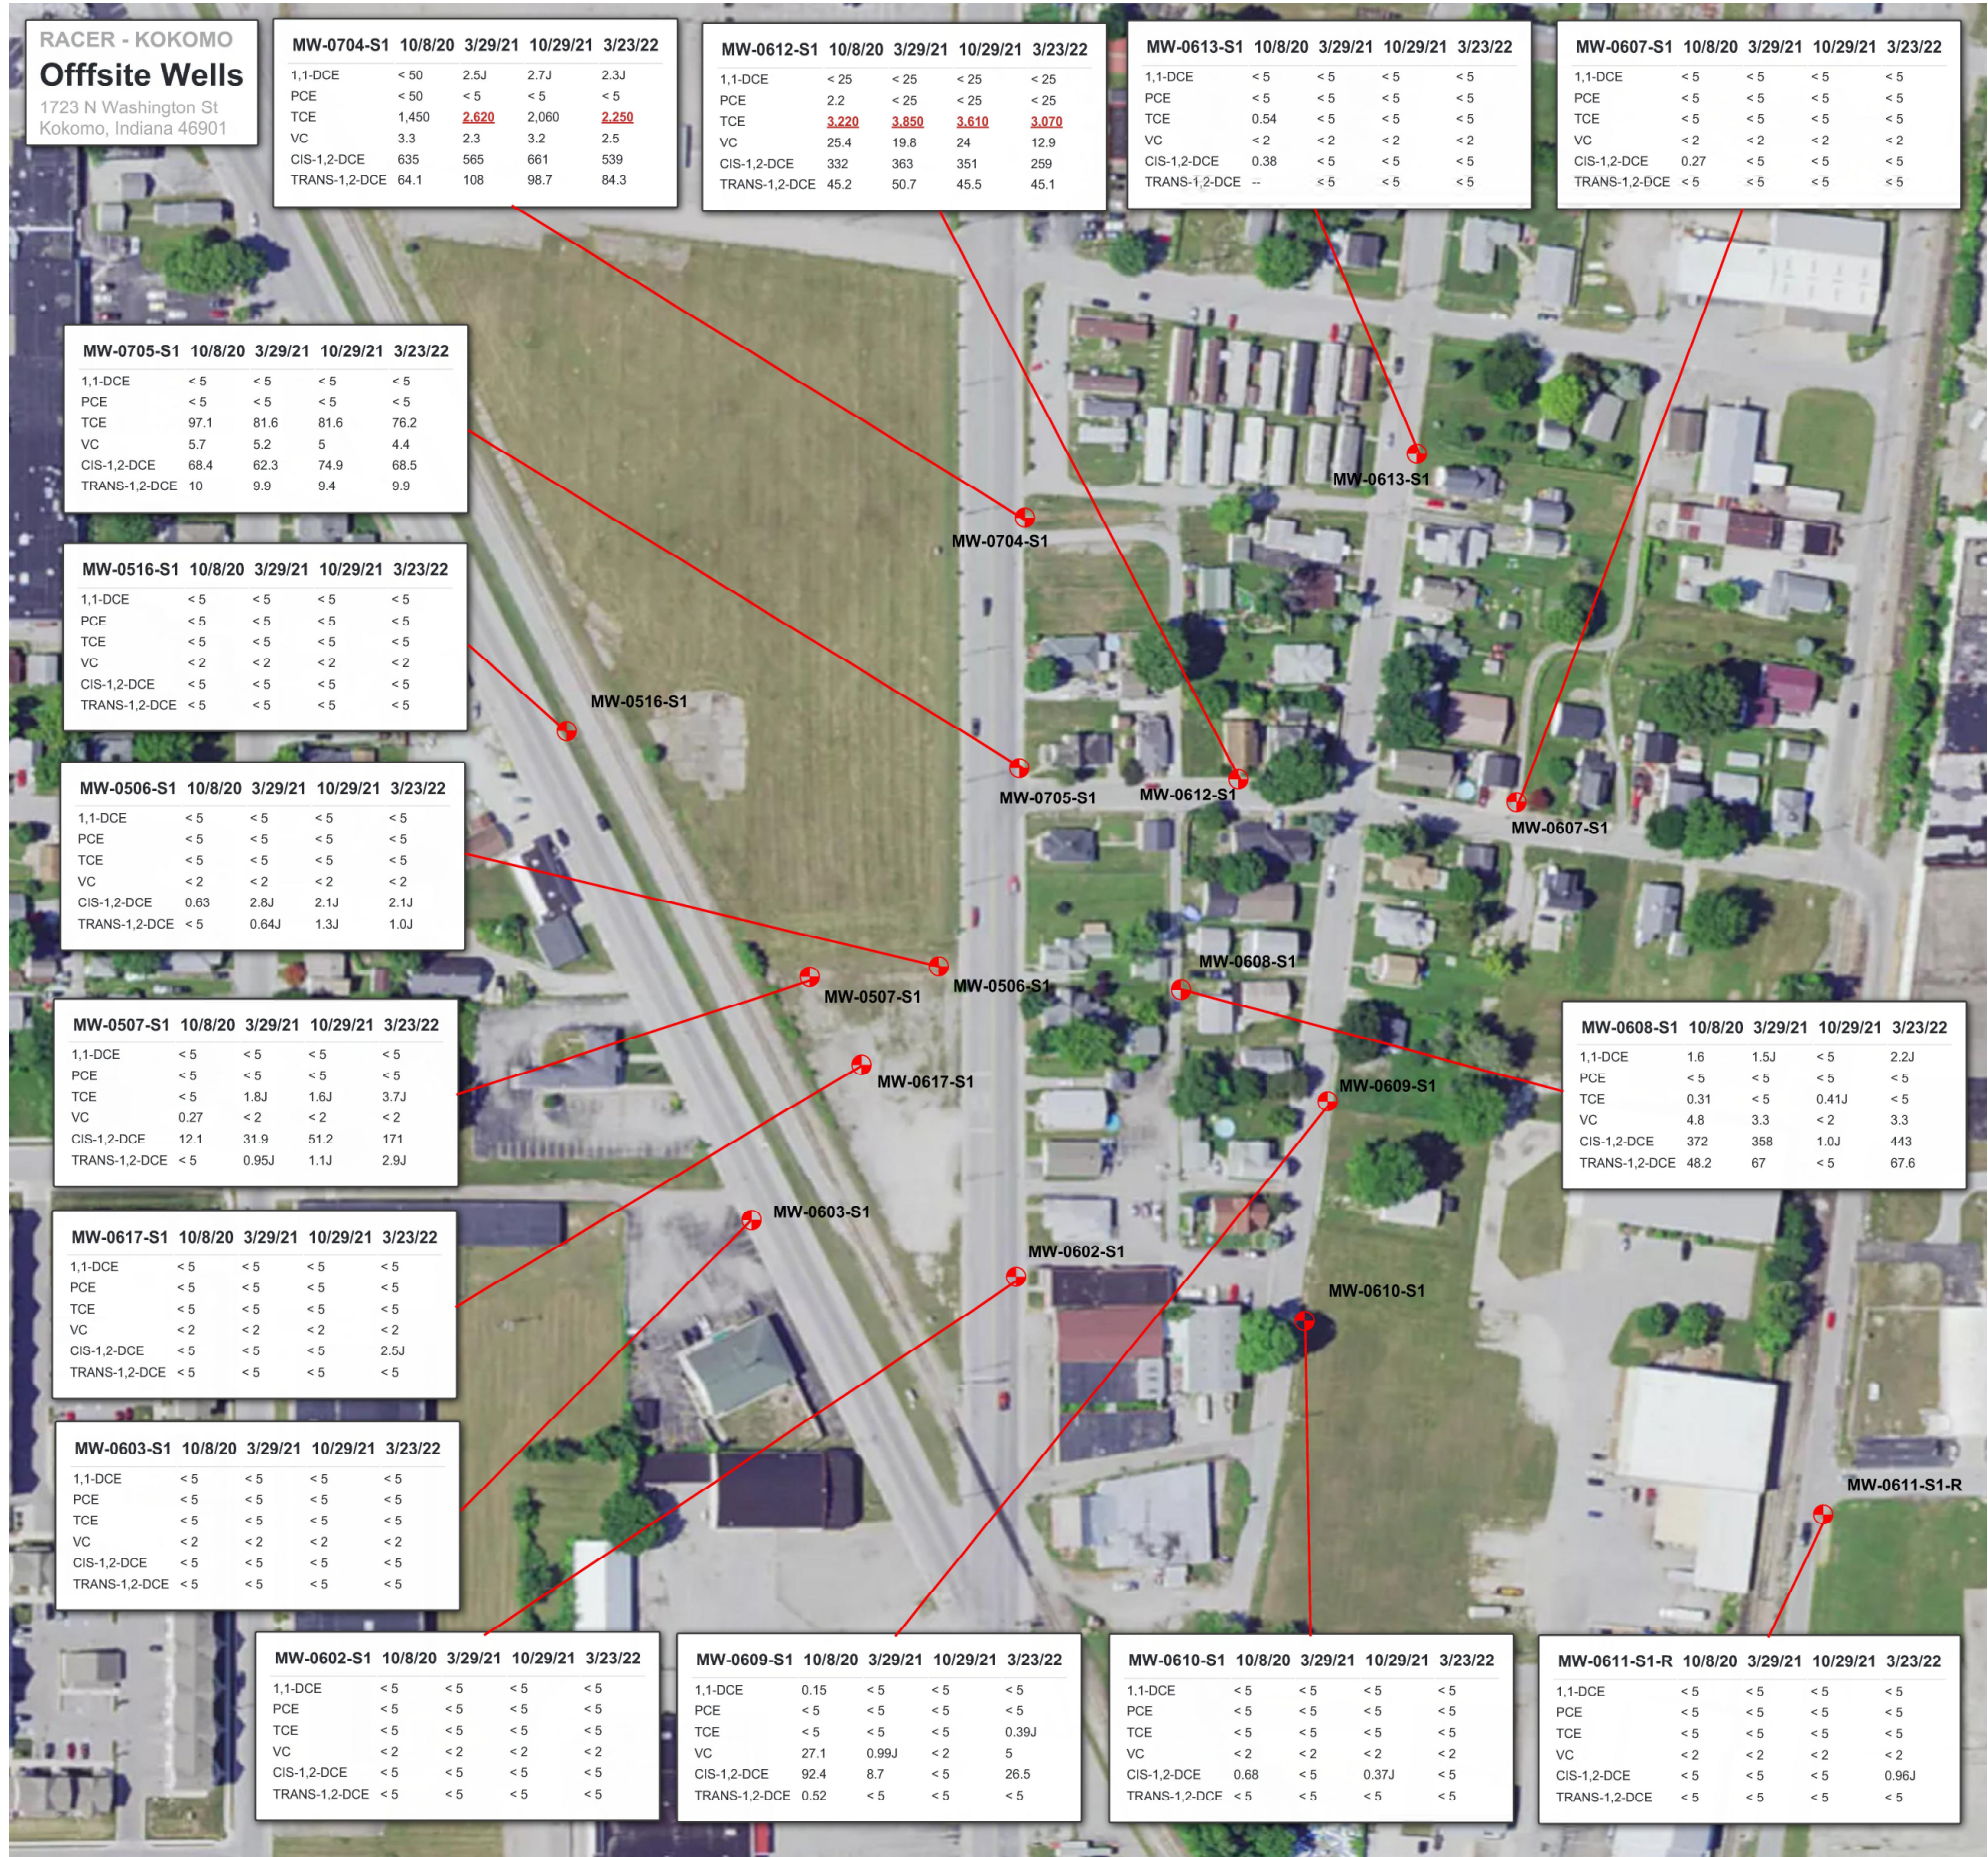


LEGEND:

MW-0603-S1  MONITORING WELL SCREENED IN S1 UNIT

Site Specific Industrial Vapor Intrusion Screening Criteria	
Constituent of Concern	MCL
1,1-Dichloroethene	77,160
Tetrachloroethene	32,800
Trichloroethene	2,150
Vinyl Chloride	1,810
Cis-1,2-Dichloroethene	57,760
Trans-1,2-Dichloroethene	61,980

- NOTES:**
- RESULTS ARE REPORTED IN MICROGRAMS PER LITER (µg/L)
 - THE DATA ARE SCREENED AGAINST SITE SPECIFIC INDUSTRIAL VAPOR INTRUSION CRITERIA
 - CONSTITUENTS OF CONCERN ARE LIMITED TO THOSE THAT HAVE BEEN DETECTED ONE OR MORE TIMES
 - RED VALUES EXCEED THE SCREENING CRITERIA
 - < - THE COMPOUND WAS ANALYZED FOR BUT NOT DETECTED. THE ASSOCIATED VALUE IS THE COMPOUND QUANTITATION LIMIT
 - J – THE COMPOUND WAS POSITIVELY IDENTIFIED; HOWEVER, THE ASSOCIATED NUMERICAL VALUE IS AN ESTIMATED CONCENTRATION ONLY

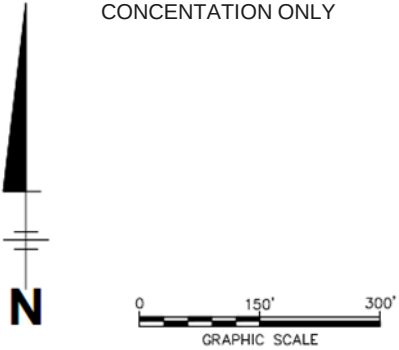

RACER TRUST
FORMER GM DELCO PLANT 5
KOKOMO, INDIANA
SEMI-ANNUAL DATA REPORT – FIRST HALF 2022

OFF-SITE GROUNDWATER VOLATILE ORGANIC
COMPOUND ANALYTICAL RESULTS SCREENED
WITH INDUSTRIAL GROUNDWATER VAPOR
INTRUSION CRITERIA

Appendix A

First Half 2022 Progress Report



**Revitalizing Auto Communities
Environmental Response Trust**

Ms. Michelle Kaysen
U.S. Environmental Protection Agency, Region 5
Waste Management Division
77 West Jackson Blvd., DE-9J
Chicago, IL 60604-3590

July 15, 2022

RE: First Half 2022 Progress Report
RCRA Corrective Action
Former GM Delco Plant 5, Kokomo, IN
USEPA ID No. IND000806844

Dear Ms. Kaysen:

In accordance with the Performance-based Administrative Order on Consent (Order) between the U.S. Environmental Protection Agency Region 5 (USEPA) and Revitalizing Auto Communities Environmental Response (RACER) Trust, please find the attached progress report for the first half of 2022. This progress report details activities that have been completed at the RACER Trust owned Former GM Delco Plant 5 in Kokomo, Indiana (Site) from January 1, 2022 through June 30, 2022.

Please let me know if you have any questions about the report.

Sincerely,

Robert W. Hare, P.E., CHMM
Cleanup Manager – (IL, IN, KS, MO,

Attachment A – First Half 2022 Progress Report

ATTACHMENT A
FIRST HALF 2022 PROGRESS REPORT
PERFORMANCE-BASED ADMINISTRATIVE ORDER ON CONSENT
RCRA CORRECTIVE ACTION
FORMER GM DELCO PLANT 5, KOKOMO, IN
JANUARY 1, 2022 TO JUNE 30, 2022

WORK PERFORMED THIS HALF

- On January 14, 2022, submitted the 2021 Semi-Annual Progress and Data Report, Second Half to USEPA.
- Completed site-wide groundwater gauging and deployed passive diffusion bag samplers on March 1, 2022. Groundwater samples were collected from passive diffusion bag samplers on March 23, 2022, after three weeks of equilibration.
- Submitted a revised Corrective Measures Implementation Work Plan on June 11, 2022.

DATA AVAILABLE DURING THIS HALF

- Analytical results from the March 2022 groundwater sampling event are included in the attached *Semi-Annual Progress and Data Report, First Half 2022*.

PROBLEMS ENCOUNTERED

- None.

SUMMARY OF PROBLEM RESOLUTION

- N/A.

POTENTIAL PROBLEMS

- None.

ESTIMATED PERCENT COMPLETE AND INFORMATION SUMMARY FOR SELECTED ACTIVITIES

- Description of Current Conditions 100%

Summarized available information for the Site and identified seven Areas of Interest (AOIs), four of which require additional investigation. No ecological habitat was identified at or in the immediate vicinity of the Site. Due May 15, 2006 and submitted October 10, 2005.

- Public Participation Plan 100%
- Resource Conservation and Recovery Act (RCRA) Facility Investigation (RFI) Work Plan 100%

Submitted December 15, 2005.

- RFI Phase I Implementation 100%

Objective was to characterize the hydrogeology, to evaluate potential off-site groundwater impacts and to characterize AOIs at the Site. Phase I included installation of 38 soil borings and 20 monitoring wells. Ninety-five soil, eight borehole water, and 23 groundwater samples were analyzed. Completed in October 2005.

- RFI Data Report (Phase I data) 100%

Major findings included identifying small, isolated zones with perched groundwater, and two continuous saturated sand units over the investigation area with shallow groundwater flow generally to the southeast. Trichloroethene (TCE) is primary chemical of concern, with source areas identified in AOIs 5 and 7. TCE groundwater impacts extend off-site, but are not present in borehole water samples collected approximately 800 feet from the Site. No potable water wells were identified in immediate vicinity of the Site. Currently, no unacceptable risks to human health have been identified. Submitted January 19, 2006.

- RFI Phase II Implementation 100%

Objective was to further characterize on- and off-site groundwater impacts and AOIs on Site. Phase II included installation of 29 soil borings and 20 monitoring wells. Seventy-five soil, two borehole water, and 20 groundwater samples were analyzed. Completed in March 2006.

- RFI Data Report (updated to include Phase II data) 100%

Major findings included more precise delineation of on- and off-site TCE groundwater impacts. Groundwater flow in the bedrock appears to be generally to the northeast. TCE distribution in bedrock groundwater indicates an upgradient source of TCE to the bedrock groundwater. Source area soil impacts were more precisely delineated at AOIs 5 and 7, and a possible additional source area was identified in the vicinity of the former south manufacturing building. Currently, no unacceptable risks to human health have been identified. Submitted May 26, 2006.

- RFI Phase III Implementation 100%

Objective was to further characterize on- and off-site groundwater impacts and AOIs on site. The initial RFI Phase III field work included installation of six soil borings and 13 monitoring wells. Fourteen soil, four borehole water, and 42 groundwater samples were submitted for analysis. An additional six soil borings and four monitoring wells were installed, and 16 soil samples and four groundwater samples were collected as part of additional “step-out” activities (Phase IIIb) performed based on review of preliminary RFI Phase III soil and borehole water sample analytical data. Following review of the preliminary data from Phase IIIb, two additional monitoring wells were installed (Phase IIIc) to further characterize and delineate the extent of groundwater containing TCE in the S1 unit in the northwestern portion of the Site (MW-0623-S1), and in the S2 unit east of the Site along Lordeman Street (MW-0607-S2). Access was obtained to the adjacent former Midwest Plating property, where three monitoring wells were installed, and soil and groundwater samples were collected. Started on October 9, 2006 and completed in March 2007.

- RFI Data Report (updated to include Phase III data) 100%

Major findings included more precise delineation of on- and off-site groundwater impacts. Groundwater flow in the bedrock appears to generally be to the south. The source of the cis-1,2-dichloroethene (cis-1,2-DCE) in bedrock groundwater is uncertain. Additional characterization of the groundwater in the bedrock is necessary. There are relatively high concentrations of TCE and tetrachloroethene (PCE) in the soil at the former Midwest Plating property. More precise delineation of source area soil impacts is necessary at AOI 5 and the former south manufacturing building. Currently, no unacceptable risks to human health have been identified. Submitted June 1, 2007.

- RFI Soil Gas Sampling 100%

Objective is to allow for verifying the appropriateness of the groundwater vapor intrusion criteria that have been used to guide the RFI field investigation at the Site. A work plan addendum was submitted to USEPA on July 10, 2007. A conference call was held with USEPA to discuss the work plan, and the work plan was subsequently revised. USEPA’s comments were incorporated, and the work plan addendum was resubmitted to USEPA. Soil gas monitoring ports were installed in the residential area east of the Site on August 7, 2007, and soil gas samples were collected on August 13, 2007. Preliminary soil gas analytical results were submitted to USEPA on August 28, 2007, and a conference call was held to discuss those results on August 30, 2007. Additional soil gas sampling ports were installed on September 4, 2007, and additional soil gas samples were collected on September 17, 2007. The preliminary analytical results from the second sampling event were submitted to USEPA on September 27, 2007. USEPA provided comments on the preliminary data in a letter dated October 2, 2007. The comment letter and results were discussed during an October 16, 2007, conference call. Additional risk evaluation was completed and submitted to USEPA on October 30, 2007, and a conference call to discuss the additional information was held on November 28, 2007. General Motors Company’s (GM’s) response to USEPA’s October 2, 2007 comment letter was submitted to USEPA on December 3, 2007.

- Soil Gas Investigation Data Report 100%

The final soil gas investigation data report was submitted to USEPA on December 21, 2007.

- RFI Phase IV Implementation 100%

Objectives are to further characterize on-site soil impacts in the former south manufacturing building, to characterize the groundwater flow, and to delineate the horizontal and vertical extent of cis-1,2-DCE in the groundwater in the bedrock.

A total of 62 soil borings were advanced from August 29, 2007 to September 5, 2007 within and in the vicinity of the former north and south manufacturing buildings. These were field screened. Soil samples were collected based on field observations, and a total of 31 soil samples were submitted for laboratory analysis. An additional 26 soil borings were advanced from November 19, 2007 to November 20, 2007 to delineate TCE within, and in the vicinity of the north and south manufacturing buildings. A total of 60 soil samples were submitted for laboratory analysis. An additional 14 soil borings were advanced on January 15, 2008, to delineate TCE within, and in the vicinity of the north and south manufacturing buildings. A total of 15 soil samples were submitted for laboratory analysis. Based on review of these data, TCE is adequately delineated.

Installation of the pilot bedrock boring, packer testing, Flexible Liner Underground Technologies (FLUTe) hydraulic profiling, discrete low-flow vertical groundwater sampling, and isolated groundwater sampling was completed between August 20, 2007, and December 8, 2007. A preliminary report of the results from the pilot bedrock boring was submitted to USEPA on November 16, 2007. An updated report was submitted to USEPA on March 21, 2008. Three additional bedrock monitoring wells were installed in the upper transmissive zone from December 4, 2007 to December 15, 2007. Installation of the additional three deeper bedrock boreholes was completed from April 14, 2008, to May 1, 2008. FLUTe hydraulic profiling of the bedrock boreholes was completed from May 13, 2008, to May 15, 2008. The technical memo with the results of the profiling was submitted to USEPA on July 10, 2008. Discrete depth vertical groundwater sampling (packer sampling) of select intervals in the boreholes was completed in the third quarter 2008. An updated technical memo to summarize the data, and provide recommendations for future groundwater sampling was prepared and submitted to USEPA on October 20, 2008. A groundwater sampling event was completed in November 2008 that included collecting depth to water information across the entire monitoring well network, collecting samples from a subset of approximately 30 existing wells, and discrete depth vertical groundwater sampling (packer sampling) of select intervals in the boreholes; all to confirm the characterization of contaminated groundwater on and off site.

- RFI Supplemental Data Report (updated to include Phase IV soil data) 100%

Major findings included a more complete characterization of on-site soil impacts at AOIs 2 and 3 and the former north and south manufacturing buildings. In addition, the Phase IV soil results were evaluated relative to the determination included in the CA725 Report for the Former GM Delco Plant 5 Facility in Kokomo, Indiana, completed by ENVIRON in 2007, that all current human exposures to “contamination” at or from the Facility are under control, based on soil data collected prior to September 1, 2007. The evaluation of the Phase IV soil data indicated that results

do not alter the conclusions presented in the CA725 Report or the “YE” determination for the CA725. Submitted June 27, 2008.

- Groundwater Evaluation 100%

A draft groundwater evaluation was prepared to report GM’s evaluation of groundwater quality and flow data collected through February 2009. Submitted to USEPA on April 10, 2009. This evaluation will be included in the RFI Report. A meeting was held with USEPA on May 19, 2009 to discuss the evaluation and proposed additional investigation.

- Additional Groundwater Investigation 100%

Groundwater sampling completed June 17 through 19, 2009.

- Draft RFI Report 100%

(Submitted October 5, 2009)

A meeting was held with USEPA on October 27, 2009, to review the draft report. USEPA provided comments on the human health risk assessment on December 22, 2009. A call was held with USEPA on February 22, 2010, to discuss USPEA’s comments on the RFI risk assessment. Based on that call, a revised RFI Report was submitted to USEPA for review on March 18, 2010.

- Final RFI Report 100%

The final RFI Report was submitted to USEPA on May 21, 2010.

- Human Health EI (CA725) Report 100%

(Submitted November 30, 2007)

Minor comments were received from USEPA on December 12, 2007, and revisions submitted on December 20, 2007. USEPA approved the determination on January 3, 2008.

- Groundwater Migration EI (CA750) 100%

(Submitted November 30, 2009)

A draft determination was submitted to USEPA on October 30, 2009, and was reviewed with USEPA via teleconference on November 12, 2009. The final determination was submitted to USEPA on November 30, 2009. USEPA approved the determination on December 22, 2009.

- Draft Corrective Measures Proposal 100%

(Originally due June 30, 2010, Revised due date of August 31, 2010, Submitted on August 30, 2010)

Motors Liquidation Company (MLC), formerly GM, requested an extension to submit the Corrective Measures Proposal (CMP) on June 22, 2010. USEPA agreed to extend the submittal

date for the CMP to August 31, 2010. The draft CMP was submitted to USEPA on August 30, 2010. The draft CMP included proposed corrective measures to mitigate potentially significant future exposures that could result from historical site activities. The draft CMP also included documentation of groundwater modeling performed to support the identification of the area(s) where a groundwater use restriction should be pursued as part of final corrective measures. USEPA and MLC met on November 17, 2010, to discuss the draft CMP. Based on that meeting, MLC prepared and submitted additional information to USEPA on December 23, 2010. USEPA provided comments on the draft CMP on January 7, 2011. Based on the comments, additional evaluation was completed, and the results of that evaluation were submitted to USEPA. A conference call with USEPA was held on February 18, 2011, to discuss the comments and the results of the additional evaluation. April 30, 2011 was the established due date for revised CMP that addresses USEPA comments.

- Corrective Measures Proposal 100%

(The Final CMP was submitted to USEPA on December 6, 2011. Based on change in conceptual site model, a revised draft CMP was prepared in 2017 and 2018. The final CMP was submitted to USEPA on September 5, 2019.)

The vertical aquifer profiling and hydraulic profiling investigation conducted in 2016 allowed for the development of a refined conceptual site model for the Site and a pre-design investigation and treatability studies were completed in 2018. Subsequently, a new CMP was prepared to summarize activities and data since the RFI, update the risk evaluation, and evaluate proposed remedial alternatives. The updated CMP was submitted to USEPA on September 5, 2019.

- Semi-Annual Groundwater Monitoring 50%

The first half 2022 semi-annual groundwater monitoring event was completed on March 23, 2022.

- Vapor Intrusion Conceptual Site Model 100%

A revised version of the Conceptual Site Model (CSM) was reviewed with USEPA on December 10, 2013. Out of the review, the USEPA and RACER Trust, formerly MLC, concluded that additional data are needed to finalize the CSM. As such, RACER Trust is developing an approach to further investigate the risk of vapor intrusion associated with Site-related groundwater impacts. RACER Trust also informed USEPA that the Trust will work with USEPA to address public health concerns within the soil gas focus area. Data from a further vapor intrusion investigation and indoor air testing program were shared with USEPA on March 31, 2014. USEPA concurred that the soil gas and indoor air impacts identified to the east of the Site are not related to RACER Trust. USEPA has referred the soil gas and potential vapor intrusion issue to the east of the Site to Superfund for further evaluation. Per a request by the USEPA, ARCADIS will convert the current CSM from a presentation format into a written document format for submittal into the record. The Vapor Intrusion Conceptual Site Model was finalized and submitted to USEPA on October 19, 2015.

- Monitored Natural Attenuation Evaluation 100%

An evaluation of MNA was completed to determine if MNA could be incorporated into the final corrective measures for the Site. The MNA evaluation report was submitted to USEPA on January 19, 2016.

- Calcium Oxide Pilot Study 100%

A Work Plan for the pilot study was drafted and submitted to USEPA (June 30, 2015). An RFP was prepared and submitted to a selection of contractors (August 8, 2015). The evaluation of remedial technologies is currently on hold until additional data is collected to further enhance the conceptual site model. This additional data collection includes the completion of a vertical aquifer and hydraulic profiling transect along the eastern property boundary. RACER Trust and USEPA made the decision to re-evaluate the corrective measures and RACER Trust will prepare a new CMP to capture all data and information generated since the last submitted CMP, as described above.

- Pre-Design Investigation and Treatability Study 100%

A work plan for the pre-design investigation (PDI) was drafted and submitted to USEPA (March 7, 2018). The PDI was completed from March 20, 2018 through April 5, 2018). Soils were collected in order to complete the treatability study.

- Corrective Measures Implementation (CMI) Work Plan 100%

A draft Corrective Measures Implementation Work Plan was submitted on October 25, 2021 based on the Final Decision and Response to Comments signed on June 16, 2021. EPA provided comments on the *CMI Work Plan*. RACER and Arcadis submitted a revised CMI Work Plan on June 11, 2022 which addressed EPA's comments.

- Corrective Measures Implementation 5%
 - Bid documents and Contractor Selection 100%
 - Mobilization and Baseline Sampling 0%
 - Overburden Removal 0%
 - In-Situ Stabilization and Solidification Mixing 0%
 - Backfill and Site Restoration 0%

- Long-Term Stewardship (LTS) Plan 0%

A Long-Term Stewardship (LTS) Plan for monitoring and maintenance activities after remediation is implemented is required based on the Final Decision and Response to Comments signed on June 16, 2021.

- Institutional Controls 0%

- Environmental Restrictive Covenant for Site 0%
- Well Restriction Overlay District 0%

SUMMARY OF CONTACTS WITH INTERESTED PARTIES

- The following documents were placed in the public information repository:
 - *Semi-Annual Progress and Data Report, First Half 2022*, Former GM Delco Plant 5, Kokomo, IN, USEPA ID No. IND000806844, July 15, 2022.

CHANGES IN PERSONNEL

- None.

PROJECTED WORK FOR NEXT REPORTING PERIOD

The following activities are anticipated to be completed in the second half of 2022:

- Begin implementation of the CMI Work Plan.
- Begin preparation of LTS Plan.
- Begin process for obtaining a well restriction overlay district.
- Draft Environmental Restrictive Covenant for the site.
- Complete a site-wide groundwater gauging and sampling event in October 2022.
- Prepare summaries of meetings, data reviews, or conference calls with USEPA, as appropriate.

Appendix B

Groundwater Analytical Reports and Data Validation Reports (Data CD)

Arcadis U.S., Inc.
150 W. Market Street, Suite 728
Indianapolis
Indiana 46204
Phone: 317 231 6500
Fax: 317 231 6514
www.arcadis.com