

Site-Wide Groundwater Monitoring Report for 2011

Revitalizing Auto Communities Environmental Response Trust (RACER Trust)

Former Delphi Harrison Thermal Systems, Moraine Plant
Former General Motors Powertrain Group, Moraine Engine Plant
Former General Motors Truck Group, Moraine Assembly Plant

Moraine, Ohio

February 29, 2012

1. Introduction	1
1.1 Site Description	2
1.2 Groundwater Monitoring Program Objectives	4
1.3 Baseline Groundwater Monitoring Program Sampling Event	4
1.4 Corrective Measures Description	5
1.4.1 In-Situ Reactive Zones	5
1.4.2 Capture Zones	7
2. Groundwater Monitoring Summary	9
2.1 Groundwater Monitoring Activities/Methodologies	9
2.1.1 Groundwater Elevation Monitoring	9
2.1.2 Monthly Groundwater Recovery System Monitoring	10
2.1.3 Site-Wide Groundwater Monitoring	10
2.1.4 Laboratory Analytical Methods	11
2.2 Groundwater Monitoring Program Results	12
2.2.1 Groundwater Elevation Monitoring	12
2.2.1.1 Upper Aquifer	12
2.2.1.2 Lower Aquifer	14
2.2.2 Vertical Gradients	14
2.2.3 Groundwater Monitoring Analytical Results	15
2.2.3.1 Upper Aquifer	16
2.2.3.2 Lower Aquifer Groundwater Quality	24
3. Corrective Measure Performance	27
3.1 RZ Performance Results	27
3.2 Capture Zone Performance Results	27

4. Corrective Active Completion Strategy	29
4.1 Effectiveness of Corrective Measure Activities	29
4.1.1 Background and Objectives	29
4.1.2 Methodology	30
4.1.3 Results	32
4.2 Monitoring of Land-Based Waste Management Units	36
4.2.1 Background and Objectives	36
4.2.2 Methodology	37
4.2.3 Results	38
5. Conclusions and Recommendations	42
5.1 Land-Based Waste Management Units	42
5.2 Corrective Measures Performance	42
5.2.1 In-Situ Treatment	42
5.2.2 Hydraulic Control	43
5.3 Reassessment of Site-Wide Groundwater Monitoring Program	44
6. References	46

Tables

1	Site-Wide Groundwater Monitoring and Remedial System Monitoring Events in 2011.
2	Carbon Source Solution Introduction Volumes for 2011.
3	Summary of Groundwater VOC Analytical Results from Upper/Lower Aquifer Monitoring Wells in 2011.
4	Influent Monitoring of the Air Stripper Tower for 2011.
5	NPDES Permit Effluent Monitoring of the Air Stripper Tower for 2011.
6	DN-13 Monthly Monitoring for 2011.
7	Monitoring Well Construction Details.
8	Groundwater Level Measurements Collected During 2011.

- 9 Summary of Precipitation Measurements Recorded by the National Weather Service During 2011 – Dayton, Ohio.
- 10 Vertical Gradients for Shallow/Deep Well Pairs in 2011.
- 11 Corrective Action Monitoring Results for Comparison to Remediation Target Levels (RTLs).
- 12 Source Concentrations and Estimated Contributions to Receptor Points for In-Place Management Units.

Figures

- 1 Site Layout.
- 2 Site-Wide Corrective Measures.
- 3 Reactive Zone #1
- 4 Reactive Zones #3 and #4.
- 5 Upper Aquifer Wells for Site-Wide Groundwater Monitoring.
- 6 Lower Aquifer Wells for Site-Wide Groundwater Monitoring.
- 7 Recovery Well TW-2 Influent VOCs since Groundwater Recovery and Treatment Startup.
- 8 Potentiometric Surface (Upper Aquifer) September 27-28, 2011.
- 9 Potentiometric Surface (Lower Aquifer) September 27-28, 2011.
- 10 VOC Databoxes for Upper Aquifer Wells.
- 11 VOC Databoxes for Lower Aquifer Wells.
- 12 RZ-1 Area Groundwater Concentration Graphs.
- 13 RZ-3 East Groundwater Concentration Graphs.
- 14 RZ-3 West Groundwater Concentration Graphs.
- 15 RZ-4 East Groundwater Concentration Graph.

Appendices

- A Site-Wide Groundwater VOC Analytical Results from 1999 to 2010
- B Groundwater Sampling Data for 2011 Site-Wide Groundwater Monitoring Event
- C Groundwater Analytical Database for 2011

D	In-Situ Reactive Zones Performance Results for 2011
E	Supporting Documentation for Corrective Action Completion Evaluation for 2011

1. Introduction

This Site-Wide Groundwater Monitoring Report presents the groundwater monitoring activities completed in 2011 at the following Revitalizing Auto Communities Environmental Response Trust (RACER Trust) (formerly General Motors Corporation [GM]) facilities located in Moraine, Ohio (Figure 1): former Delphi Harrison Thermal Systems Moraine Plant (former Delphi Thermal Moraine), former General Motors Powertrain Group, Moraine Engine Plant (former Moraine Engine), and former General Motors Truck Group, Moraine Assembly Plant (former Moraine Assembly). A multi-phased Resource Conservation and Recovery Act (RCRA) Facility Investigation (RFI) was completed for these facilities and approved by the United States Environmental Protection Agency (U.S. EPA) in June 2000 (ARCADIS Geraghty & Miller, Inc. 2000a and b, ENVIRON 2000a and b). The RFI identified that the primary source area of volatile organic compounds (VOCs) in shallow groundwater at the three facilities is located at the Area of Interest (AOI) 7 - Former Oil House Area, in the northern portion of the former Moraine Engine facility (Figure 2).

The focus of the Interim Measures/Corrective Measures (IM/CM) Report (ARCADIS Geraghty & Miller, Inc. 2001) was a site-wide remedy that addressed the source of the VOCs in groundwater and the downgradient plume based on the conceptual site model at that time. Subsequent to submittal of the IM/CM Report, implementation of the corrective measures proposed in the IM/CM Report has been conducted on an ongoing basis by former GM. The corrective measures proposed in the IM/CM Report incorporated the Former Oil House Area corrective measures (in-situ remediation of groundwater in the Oil House Area and downgradient of the Oil House Area, Figure 2); the capture zone corrective measures (hydraulic control with a pump and treat system for the upper aquifer and hydraulic control for the lower aquifer, Figure 2); institutional actions (the Site will remain industrial and groundwater use will be restricted to non-potable purposes); and a site-wide groundwater monitoring program.

The conceptual site model previously developed for the Site was revised using the additional data collected during the supplemental investigations since submittal of the IM/CM Report. The revised conceptual site model was presented in the draft Corrective Measures Proposal (CMP) (ARCADIS, Inc. 2008a) and was used to support the updated risk analysis and corrective measures evaluation. The proposed final site-wide corrective measures for the Moraine Facilities combines source treatment and containment with downgradient hydraulic control of groundwater and appropriate engineering and institutional controls to prevent potentially significant exposures during the implementation of these corrective measures. The specific elements of the

proposed final site-wide corrective measures presented in the CMP and CMP Addendum (ARCADIS, Inc. 2008a and 2010a) are:

- 1). Upper Aquifer Reactive Zone (RZ) Corrective Measures: operation of in-situ remediation barriers in the upper aquifer downgradient and side-gradient of the Former Oil House Area and downgradient of the Moraine Assembly Process Waste Collection Systems (RZ-1, proposed relocated RZ-2, RZ-3, RZ-4) for treatment.
- 2). Upper Aquifer Capture Zone Corrective Measures: operation of an upper aquifer recovery well at the downgradient property boundary (TW-2) for hydraulic control.
- 3). Lower Aquifer Corrective Measures: operation of two lower aquifer recovery wells, one located downgradient of wells GM-68D/GM-75D for lower aquifer source containment and one downgradient of the Site property boundary (DN-13) for hydraulic control.
- 4). Corrective Measures Groundwater Monitoring: completion of monitoring groundwater quality associated with land-based units, performance monitoring for corrective measures, and the point of compliance wells.
- 5). Engineering/Institutional Controls: implementation of land and groundwater use restrictions via environmental covenants for the entire facility.

This report addresses several components of the proposed final remedy, including the site-wide groundwater monitoring program and the performance of the ongoing corrective measures (Table 1). All groundwater monitoring for the facilities was conducted in accordance with the approved Site-Wide Groundwater Monitoring Plan (ARCADIS G&M, Inc. 2002) and as modified in the draft Site-Wide Groundwater Monitoring Report for 2009 (ARCADIS, Inc. 2010b).

1.1 Site Description

The RACER Trust Moraine Site has been used for industrial purposes since the property was acquired in the mid-1920s by former GM. The former Moraine Engine and Moraine Assembly facilities occupy approximately 239 acres, while the adjacent former Delphi Thermal Moraine facility occupies approximately 124 acres. The facilities are located in the City of Moraine in Montgomery County in southwestern Ohio. A small portion of the Moraine Assembly facility is located in the City of

Kettering. Figure 1 presents the location of each facility, property boundaries, and site features.

Frigidaire (a former division of GM) produced appliances from the late 1920's until 1979. GM announced the shutdown of all Frigidaire operations in January 1979. During 1980 and 1981, the majority of the former Frigidaire Plant 2 was converted to the former Moraine Engine facility, and the former Frigidaire Plant 3 and the northeast corner of former Frigidaire Plant 2 were converted to the Moraine Assembly facility. Since 1981, former Moraine Engine operations have included the machining, painting (this operation was discontinued in September 1995), and assembly of diesel truck engines. Operations at the former Moraine Engine facility ceased in the fall of 2000. The plant building has undergone decommissioning and demolition, and the majority of this site has been covered with a parking surface. GM operated a regional haulway at the location of the former Moraine Engine plant, which was referred to as the Vehicle Distribution Center until 2008. Operations at the regional haulway ceased in December 2008.

Since 1981, Moraine Assembly operations included the manufacture, assembly, and painting of small trucks and later sport utility vehicles (SUVs). Operations at the former Moraine Assembly ceased in December 2008.

Former Delphi Thermal Moraine's major operations, which began in 1941, included the machining and assembly of automotive air conditioning compressors, accumulator dehydrators, and miscellaneous air conditioning valves. Operations at the former Delphi Thermal Moraine Building 14 ceased in September 2003 and the building was decommissioned. Demolition of Building 14 was completed in 2005.

On June 1, 2009, GM and certain subsidiaries filed voluntary petitions for relief under Chapter 11 of the Bankruptcy Code. An order was entered approving the sale of substantially all of GM's assets to a new and independent company (now known as General Motors Company, LLC) under Section 363 of the Bankruptcy Code on June 5, 2009. The sale closed on July 10, 2009. At that time, GM Corporation changed its name to Motors Liquidation Company. RACER Trust was established on March 31, 2011 by a federal bankruptcy court to own, manage, remediate and revitalize the properties from the 2009 GM bankruptcy.

On June 30, 2011, RACER Trust sold former Delphi Thermal Moraine, former Moraine Engine Plant, and former Moraine Assembly Plant to IRG Moraine, LLC. As part of the property transfer, RACER Trust retained environmental liability for these properties.

The Closed South Settling Lagoon was not included in this property transaction. The Closed South Settling Lagoon was retained by RACER Properties LLC.

On September 29, 2011, the Administrative Order on Consent (AOC) for the Moraine Site was fully executed proceeding under Section 3008(h) of the Resource Conservation and Recovery Act, as amended, 42 U.S. C. Section 6928(h), U.S. EPA Docket No: RCRA-05-2011-0016. The performance-based AOC covers corrective action for past releases of hazardous contaminants at or from the Site.

1.2 Groundwater Monitoring Program Objectives

The objectives of groundwater monitoring at the former Moraine Facilities are as follows:

1. Monitor groundwater quality upgradient and downgradient of the closed North and South Settling Lagoons;
2. Monitor groundwater quality upgradient and downgradient of Landfills L1, L2, and L3;
3. Monitor the effectiveness of and the need for current groundwater capture systems in the upper and lower aquifers at the southern, downgradient property boundary;
4. Monitor the effectiveness of corrective measures activities in In-Situ Reactive Zones RZ-1, RZ-3, and RZ-4, to address VOCs related to the Former Oil House Area; and
5. Monitor an appropriate list of wells once corrective measures objectives have been met, as defined in the CMP and CMP Addendum (ARCADIS, Inc. 2008a and 2010a), to verify that these objectives continue to be met without the active measures.

1.3 Baseline Groundwater Monitoring Program Sampling Event

To provide a basis for evaluating the performance of the Corrective Measures, a comprehensive site-wide groundwater sampling event for VOCs was completed in September 1999 to establish a baseline data set. The next site-wide groundwater sampling event was completed between September and October 2000. During the 2000 sampling event, at the request of U.S. EPA, groundwater samples were analyzed

for Appendix IX VOCs by Method 8260 and cis-1,2-dichloroethene (cis-1,2-DCE), semi-volatile organic compounds (SVOCs) and metals to verify that current groundwater conditions were consistent with previous Site conditions. The results of this one-time sampling event confirmed that VOCs were the only constituents of potential concern in groundwater at the Site. SVOCs were not detected and metals were not detected above levels of concern during the 2000 sampling event. The analytical results from the 1999 baseline event and the 2000 site-wide event are presented in the Draft Interim Measures/Corrective Measures Report (ARCADIS Geraghty & Miller, Inc. 2001).

1.4 Corrective Measures Description

1.4.1 In-Situ Reactive Zones

The reductive dechlorination of chlorinated VOCs can be enhanced by the introduction of a carbon source that stimulates activity of indigenous microorganisms. The high carbon loading triggers a succession of microbial species. Initially, aerobic electron acceptors such as oxygen and nitrate are consumed. Then, the microbial succession leads to a consortium of species that survive by sulfate reduction, methanogenesis and other similar metabolic pathways, supporting the highly reducing conditions necessary for the dechlorination of tetrachloroethene (PCE), trichloroethene (TCE), cis-1,2-DCE, and vinyl chloride. This enhanced reductive dechlorination process (ERD) has been developed at the Site through the use of RZs for introduction of a degradable carbon source necessary to develop the desired reducing conditions.

Enhanced reductive dechlorination was implemented in 1999 as a component of the Former Oil House Area corrective measures at three zones: 1) at the southern boundary of the Former Oil House Area (RZ-1); 2) at an intermediate downgradient location south of the Former Oil House Area in the ME well series area (RZ-2 which was operated from 1999 to 2002); and 3) at a downgradient location south of former Delphi Thermal Moraine (RZ-3 West) and the former Moraine Engine plant (RZ-3 East). Using the data obtained from the Supplemental Groundwater Investigation conducted in 2006, RZ-4 was designed and installed to address VOC impacts identified west of RZ-3 West (GM-16). The RZ locations are shown on Figure 2. The actual layouts of each RZ are shown on Figures 3 and 4, and discussed below:

- At RZ-1, molasses solution was introduced into the upper aquifer, above the upper clay till. The carbon injection wells are screened across the lower 10 ft of this portion of the upper aquifer, which is 4 ft to 12 ft thick. RZ-1 consists of 21

introduction wells, of which 12 wells (RZ-1J through RZ-1U) were added in 2002, to expand RZ-1.

- Former RZ-2 consisted of four monitoring wells (ME-1 [abandoned], ME-2, ME-4, ME-5 [abandoned]), located along the western edge of the former Moraine Engine Plant 3 building. The RZ-2 wells were screened within the upper 3 ft of the upper aquifer. RZ-2 was operated from 1999 to 2002. Relocation of in situ reactive zone RZ-2 has been proposed as part of the CMP.
- RZ-3 consists of 46 introduction wells, 30 wells in RZ-3 West (RZ-3A through RZ-3DD) and 16 wells in RZ-3 East (RZ-3FF through RZ-3KK, and RZ-3MM through RZ-3VV). At RZ-3, the introduction wells were screened from the approximate upper aquifer water table to a depth of 46 ft to 68 ft bls, allowing carbon introduction through the lower 20 ft to 30 ft of the upper aquifer. Introduction wells RZ-3RR through RZ-3VV were installed in April 2005 in order to establish a reactive zone further down-gradient and closer to the property boundary. The additional introduction wells were screened from 34 ft to 54 ft bls. Introduction wells RZ-3MM through RZ-3QQ have not been operated since the installation of RZ-3RR through RZ-3VV in 2005, therefore, of the 16 existing introduction wells in RZ-3 East, only 11 are active.
- RZ-4 consists of 15 introduction wells, 7 wells in RZ-4 West (RZ-4I through RZ-4O) and 8 wells in RZ-4 East (RZ-4A through RZ-4H). These introduction wells were installed in July 2006. The RZ-4 West introduction wells are located in the southeast corner of the closed South Settling Lagoon and the RZ-4 East introduction wells are located north of Landfill L1 and west of the Waste Pile/Staging Area. At RZ-4, the introduction wells were screened from the approximate upper aquifer water table to a depth of 57 ft to 62 ft bls, allowing carbon introduction through the lower 30 feet of the upper aquifer. Only RZ-4 East remains active.

To establish conditions conducive to ERD within reactive zones RZ-1, RZ-2, and RZ-3, a readily degradable carbon source (a dilute solution of molasses and potable water) was periodically delivered into the reactive zone introduction wells during a 6-month period from December 1999 to May 2000. The molasses solution consisted of either a 10-to-1 or 20-to-1 ratio of potable water to feed-grade molasses that was pumped into each RZ well. The initial event, conducted in December 1999, consisted of two consecutive rounds of carbon source introductions in each RZ well. After the initial introduction event, the carbon source solution introductions were scheduled twice per

month through May 2000. Due to the success during the first six months of implementing this technology, carbon source introduction activities continued in October, November, and December 2000, and subsequently from June 2001 through December 2011.

Introductions in RZ-1 were modified in the fall of 2003 after review of the previous site-wide groundwater analytical results. Due to the success of RZ-1, reduced carbon loading was implemented at a frequency of one introduction event every other month, and monitoring well GM-28 was periodically sampled to ensure that the necessary reducing conditions were being sustained to promote the dechlorination process. In May 2005, the introduction routine was changed to two injections every quarter to maintain reducing conditions and provide sufficient carbon to allow for complete degradation of the VOCs. Monthly injections were completed in 2011, with exception of January.

Introductions continued throughout 2011 on a monthly schedule in Reactive Zone RZ-3 except for January due to weather conditions. Wells GM-21, GM-6, and GM-8 serve as the downgradient performance monitoring wells for RZ-3. Monthly carbon introductions in RZ-4 East continued from February through December 2011. Monitoring Well GM-19S serves as the downgradient performance monitoring well for RZ-4 East. The molasses is stored on-site and mixed with potable water prior to injections. Details regarding the frequency and strength of carbon source introductions for 2011 are provided in Table 2.

1.4.2 Capture Zones

The capture zone corrective measure for the upper aquifer consists of groundwater extraction at the property boundary using well TW-2, treatment through an air stripper tower, and discharge through a NPDES permitted outfall to the South Storm Water Retention Basin ultimately discharging to the Great Miami River. Groundwater recovery from TW-2 began on January 31, 1996. During the 16 years of operation (January 31, 1996 through December 31, 2011), the system has recovered and treated a total of 1,004,120,603 gallons of groundwater at an average flow rate of 119.96 gallons per minute (gpm). Annual total gallons recovered and average flow rate during 2011 were 49,440,780 gallons and approximately 101.16 gpm, respectively. The average flow rate of approximately 101.16 gpm in 2011 is 26.82 gpm higher compared to 2010 (74.34 gpm). The location of recovery well TW-2 is shown on Figure 2.

As documented in the 2011 Monthly (January through September) and Fourth Quarter 2011 (October through December) Technical Progress Reports, the treatment system is periodically shut down for short periods of time for operation and maintenance activities.

Well DN-13 is a lower aquifer extraction well that is owned and operated by Montgomery County and has been used in a Pump-to-Waste Program since March 1990 in cooperation with GM Corporation/MLC until March 31, 2011 and continued with RACER Trust. The capture zone corrective measure for the lower aquifer consists of continued pumping of DN-13 in 2011 at an approximate range of 476 to 1,000 gpm. Well DN-13 was operational throughout 2011 except for the periodic shutdowns for operation and maintenance activities that are documented in the 2011 Monthly (January through September) and Fourth Quarter 2011 (October through December) Technical Progress Reports. As discussed in the Fourth Quarter Progress Report, DN-13 was shutdown to evaluate the well screen and pump, clean the well screen, and refurbish the pump in November 2011. Capture analysis is discussed further in Section 3.2. The location of well DN-13 is shown on Figure 2.

2. Groundwater Monitoring Summary

In accordance with the Site-Wide Groundwater Monitoring Plan (ARCADIS G&M, Inc. 2002), annual groundwater sampling was completed in 2001 through 2011. The latest annual groundwater monitoring was completed in September and October 2011. At the request of the U.S. EPA, wells HR-7 and GM-9 were added to the annual program (BOW Environmental Solutions, Inc. 2010). The 1999 baseline through 2010 groundwater quality data for the site-specific VOC parameter list are reproduced in tables in Appendix A and for 2011 in Table 3 of this report to support the evaluation of the groundwater quality of source areas, the effectiveness of the on-going corrective measures (RZ and capture zones), monitoring the closed settling lagoons and monitoring plume migration.

A summary of the activities and methodologies that were completed in 2011 are presented in Section 2.1 and the groundwater monitoring results are presented in Section 2.2.

2.1 Groundwater Monitoring Activities/Methodologies

In order to meet the objectives of the groundwater monitoring program, the scope of work presented in Section 3.0 of the Site-Wide Groundwater Monitoring Plan (ARCADIS G&M, Inc. 2002) and Section 5.0 of the Site-Wide Groundwater Monitoring Report for 2010 (ARCADIS, Inc. 2010c) was implemented during 2011. The following sections summarize the collection of the annual groundwater elevation measurements, the monthly groundwater monitoring, and the annual site-wide groundwater monitoring.

2.1.1 Groundwater Elevation Monitoring

Groundwater levels were measured on September 27 and 28, 2011. The measured wells included all on-site and off-site monitoring wells at the three facilities as shown on Figure 5 (upper aquifer wells) and Figure 6 (lower aquifer wells). Groundwater levels were also measured in former Moraine Assembly production wells (where accessible), former Moraine Assembly fire wells, two lower aquifer wells (MT596M and MT576M) located east of the former Moraine Assembly and Engine plants, four City of Moraine upper aquifer wells located west of the Great Miami River, four stream gauges along the Great Miami River, and one stream gauge along Holes Creek. Groundwater levels were measured in accordance with procedures defined in the RFI Sampling and Analysis Plan, Standard Operating Procedure (SOP) #4 (Geraghty & Miller, Inc. 1997a) and recorded electronically in the field.

2.1.2 Monthly Groundwater Recovery System Monitoring

The National Pollution Discharge Elimination System (NPDES) Permit issued to former GM was transferred to RACER Trust effective December 5, 2011. The permit is for the groundwater recovery and treatment system of the upper aquifer which requires periodic monitoring and reporting of water quality in the effluent stream and pumping flow rates. Samples of groundwater pumped through the air stripping treatment tower were collected and analyzed monthly for the parameters required in the permit. The former GM's air permit for the air stripper tower expired on June 20, 2003 and the Regional Air Pollution Control Agency (RAPCA) approved renewal of this permit through June 20, 2008 as a registration status permit due to the negligible organic compound emissions from the tower. Former GM submitted a request on June 19, 2008 to RAPCA for recognition of P001 as a de minimis source of air emissions and the removal of the TW-2 Recovery Well Air Stripping Tower (P001) permit from RAPCA's records. In a letter received by former GM on June 27, 2008, RAPCA approved the stripper tower to be listed as de minimis air contaminant source and exempt from air permitting requirements. RAPCA stated in the approval letter that RAPCA will not process the submitted PTO application and will request the Ohio EPA to withdraw P001 and Permit-To-Install 08-3161 issued on October 26, 1994. Table 4 summarizes the VOC results for the monthly air stripper tower influent groundwater stream during 2011. The monthly groundwater influent data are also presented in Figure 7, for the period from the initial start-up in January 1996 through December 2011. Table 5 summarizes the VOC results for the monthly effluent groundwater stream during 2011. Table 6 summarizes the VOC results for the monthly DN-13 effluent sampling during 2011. All analyses were conducted in accordance with methods specified in the Final Interim Measures Design Plans (Geraghty & Miller, Inc. 1995).

2.1.3 Site-Wide Groundwater Monitoring

In accordance with the Site-Wide Groundwater Monitoring Plan (ARCADIS G&M, Inc. 2002) with modifications from the Site-Wide Groundwater Monitoring Report for 2008 (ARCADIS, Inc. 2009), only monitoring wells sampled on an annual basis for the site-wide monitoring event were sampled in 2011. Monitoring wells designated to be sampled on a five-year basis will be sampled next in 2013. For a summary of the site-wide monitoring well sampling program, see Table 21 of the Site-Wide Groundwater Monitoring Report for 2009 (ARCADIS, Inc. 2010b). A summary of the 2011 annual sampling event, including the number of monitoring wells and analytical parameters are presented on Table 1. Monitoring well GM-62 was abandoned and GM-57 was

damaged from activities associated with the Interstate 75 interchange construction in 2011. Monitoring wells GM-57 and GM-62 are intended to be repaired/replaced by ODOT. Well construction and survey data for the wells used in the site-wide program are presented in Table 7.

Groundwater samples were collected from specified wells using low-flow methodology following procedures outlined in SOP #21 (ARCADIS G&M, Inc., 2002). Well GM-28 was sampled with a bailer due to damage to the well. Field parameters including pH, specific conductance, temperature, oxidation/reduction potential, and dissolved oxygen were measured during purging of each well using a multi-parameter groundwater quality flow-through cell. One groundwater sample from well DN-13 was collected through the sampling valve according to SOP #28 (ARCADIS G&M, Inc., 2002).

All groundwater samples were collected and managed under standard chain-of-custody procedures, and validated in accordance with the approved Supplemental RFI Work Plan and the RFI Quality Assurance Project Plan (Geraghty & Miller, Inc., 1997a) and as presented in the draft Amended Quality Assurance Project Plan (ARCADIS, Inc. 2011a). Field parameter data for the site-wide groundwater monitoring event are presented in Appendix B. Analytical results are presented and discussed in Section 2.2.3.

2.1.4 Laboratory Analytical Methods

Groundwater samples were analyzed for the site-specific VOC parameter list using SW 846 Method 8260. This parameter list was developed after evaluating data from the September 1999 baseline groundwater sampling event and the one-time sampling event conducted in September/October 2000 (which included analysis of Appendix IX VOCs and cis-1,2-DCE, SVOCs, and metals), conducted as part of the Former Oil House Area corrective measures. The site-specific VOC parameter list is: benzene, 1,1-dichloroethane (1,1-DCA), 1,1-dichloroethene (1,1-DCE), cis-1,2-DCE, trans-1,2-dichloroethene (trans-1,2-DCE), ethylbenzene, tetrachloroethene (PCE), toluene, 1,1,1-trichloroethane (1,1,1-TCA), trichloroethene (TCE), vinyl chloride, and xylenes. Select groundwater samples from upper aquifer monitoring wells collected during the site-wide groundwater monitoring event were also analyzed for the following biogeochemical indicator parameters: manganese (total and dissolved), iron (total and dissolved), sulfate, sulfide, total organic carbon (TOC), chloride, dissolved gases (ethane and ethene), and methane. Table 1 lists specific field, laboratory, biogeochemical indicator parameters, and field and laboratory analytical methods. All groundwater samples were submitted to TestAmerica Laboratories, Inc. in North

Canton, Ohio or Microseeps Inc. in Pittsburgh, Pennsylvania. Only ethene, ethane, and methane samples were submitted to and analyzed by Microseeps. A complete set of groundwater results from 2011, including quality assurance/quality control (QA/QC) samples, are presented in Appendix C.

2.2 Groundwater Monitoring Program Results

2.2.1 Groundwater Elevation Monitoring

As part of the site-wide assessment of current groundwater conditions, groundwater levels were measured to determine groundwater flow directions in the upper and lower aquifers and to determine vertical gradients between the two aquifers. One groundwater elevation monitoring event was completed on September 27 to 28, 2011 as part of the site-wide groundwater monitoring. The groundwater level measurement data is presented on Table 8.

2.2.1.1 Upper Aquifer

The upper aquifer potentiometric surface on September 27 and 28, 2011 (Figure 8) illustrates that upper aquifer groundwater flow is generally from northeast to southwest. The influence of TW-2 pumping is observed by a deflection in the 707.5 feet above mean sea level (AMSL) contour line on the September 2011 potentiometric map (Figure 8). A comparison of the September 2011 groundwater flow conditions to the September 2010 groundwater flow map for the upper aquifer (ARCADIS, Inc. 2011b) indicates a similar gradient and flow direction across the Site. The 2011 upper aquifer groundwater flow patterns are generally consistent with groundwater flow conditions since TW-2 operation was initiated in January 1996.

Table 9 presents the 2011 monthly precipitation totals, recorded by the National Weather Service, and the deviation from calculated average amounts. The 2011 annual total precipitation recorded at the Dayton, Ohio monitoring station was 56.76 inches, which was 18.29 inches above average. Precipitation for the months of February, March, April, May, September, October, November, and December was above normal, while precipitation for all other months was below normal.

The average hydraulic gradient of the upper aquifer, calculated from site-wide groundwater level measurements in September 2011 was 0.0004 foot/foot (ft/ft). The groundwater flow velocity for the upper aquifer was calculated using the following equation:

$$V_w = Ki/N_e$$

where

V_w = groundwater flow velocity (feet per day [ft/day])

K = hydraulic conductivity (ft/day)

i = hydraulic gradient (ft/ft)

N_e = effective porosity

Hydraulic characteristics of the upper aquifer were determined by evaluation of data from pumping tests conducted in 1985 and in 1989. The median hydraulic conductivity value estimated from pumping test data was 1,650 ft/day, and effective porosity was assumed to be 0.3 to 0.5. Using hydraulic gradients for September 2011, groundwater flow velocities in the upper aquifer ranged from 1.45 ft/day to 2.41 ft/day. Assuming the most extreme condition (i.e., no retardation or retardation factor [R_d] equal to 0), the rate of VOC migration could equal the rate of groundwater flow. However, soil-VOC interaction does occur, and, therefore, the actual VOC migration rates are slower than that of groundwater flow. Most of the VOCs detected in the upper aquifer at the Site are likely to have a R_d ranging from 2 to 10 (Walton 1985), so the rate of migration of the VOCs in the upper aquifer could be as low as 0.14 ft/day.

During the Supplemental RFI program conducted in August 1998 at the Former Oil House Area, slug tests were conducted on monitor wells GM-23, GM-27 and GM-28 to assess aquifer characteristics in this area of the Site. These slug tests determined that hydraulic conductivity in the upper aquifer (both above and below the upper clay till) in this area is lower than the hydraulic conductivity calculated on a site-wide basis. Hydraulic conductivity in the portion of the upper aquifer above the upper clay till at the Former Oil House Area was determined to be approximately 43 ft/day. Below the upper clay till, the hydraulic conductivity was determined to be 54 ft/day. Using hydraulic gradients from September 2011, the groundwater flow velocities in the upper aquifer at the Former Oil House Area ranged from 0.028 ft/day to 0.047 ft/day. As discussed above, most of the VOCs detected in the upper aquifer groundwater at the Moraine Facilities are likely to have an R_d ranging from 2 to 10 (Walton 1985), so the rate of migration of the VOCs in the upper aquifer at the Former Oil House Area in September 2011 could be as low as 0.0028 ft/day.

2.2.1.2 Lower Aquifer

The lower aquifer potentiometric surface for September 27 and 28, 2011 (Figure 9) shows groundwater flow in the lower aquifer to be generally from northeast to southwest. County Well DN-13, located southwest of the former Delphi Thermal facility in the Dryden Road North Wellfield, was in operation during groundwater level measurements and had greater than 90 feet of drawdown. Figure 9 is an approximate depiction of the localized depressed groundwater elevations in the vicinity of DN-13.

No significant change in the overall flow conditions were noted in the 2011 lower aquifer groundwater level data in comparison with the November 2010 data. The average hydraulic gradients of the potentiometric surface in the lower aquifer, calculated from groundwater level measurements 2011 were 0.0006 ft/ft. Using a hydraulic conductivity of 400 ft/day, assuming a porosity of 0.3 to 0.5, and using the equation presented earlier ($V_w = Ki/N_e$), groundwater flow velocity in the lower aquifer ranged between 0.45 ft/day and 0.75 ft/day. As discussed above, most of the VOCs detected in the lower aquifer groundwater at the Moraine Facilities are likely to have an R_d ranging from 2 to 10 (Walton 1985), so the rate of migration of the VOCs in the lower aquifer in September 2011 could be as low as 0.05 ft/day.

2.2.2 Vertical Gradients

The groundwater level measurements collected on September 27 and 28, 2011 were used to determine the direction and magnitude of vertical gradients between the upper and lower aquifers (Table 10). The vertical gradients were calculated using the following equation:

$$i = h_2 - h_1 / d$$

where

h_2 = hydraulic head of lower well A (ft)

h_1 = hydraulic head of upper well B (ft)

d = distance between midpoint of screen for well A and B (ft)

i = vertical gradient

The magnitude and direction of vertical gradients indicate whether the potential exists for groundwater to flow vertically, and which direction it may flow (positive for an upward gradient and negative for a downward gradient). Calculated vertical gradients ranged from 0.0112 ft/ft upward (GM-75S/GM-75D) to 0.0760 ft/ft downward (GM-16/GM-15).

At the northern (upgradient) end of the Site, little to no vertical gradient was present in upper/lower monitoring well pairs HR-11/HR-12 and HR-9/HR-10.

The vertical upgradient at well pairs immediately downgradient (south) of the closed North Settling Lagoon was downward in well pairs W-3-N/HR-15 and W-4-N/HR-14. The vertical gradient at well pair HR-3/HR-13 (side gradient to the closed North Settling Lagoon) was upward. Well pairs in the vicinity of Landfill L1 (GM-16/GM-15, GM-2/GM-1, GM-18/GM-13, GM-6/GM-3, and 4S/GM-5) had downward vertical gradients except GM-17/GM-11 that had an upward gradient. The downward vertical gradient at the other five well pairs near Landfill L1 was likely due to the proximity of these well pairs to lower aquifer extraction well DN-13. Downgradient of the Site, the vertical gradient was downward for well pair GM-10/GM-9.

At the primary source area, near the Former Oil House Area groundwater level measurements in upper aquifer well pair GM-23/GM-27 (above the upper clay till/beneath the upper clay till) were used to evaluate the vertical gradient in the upper aquifer. The vertical gradient was downward in the upper aquifer across the upper clay till present at the Former Oil House Area. Well pair GM-23/GM-39 was used to evaluate the vertical gradient in the lower aquifer compared to the upper aquifer. A downward vertical gradient was present across both the upper clay till and the regional clay till. The vertical hydraulic gradient in well pairs GM-68S/GM-68D and GM-75S/GM-75D was upward.

Downgradient of the Site near Holes Creek, till is not present; and upon evaluation of vertical gradients in this area, well pairs GM-65S/GM-65D show an upward gradient and GM-55/GM-56 show a downward vertical gradient.

2.2.3 Groundwater Monitoring Analytical Results

As described in Section 2.1.4, groundwater was evaluated on a site-wide basis for the presence of the site-specific list of VOCs. Table 3 presents the results for the site-wide groundwater sampling event completed in 2011 for the upper and lower aquifer. Analytical data for 1999 through 2011 groundwater sampling events are presented on

Figures 10 and 11 for the upper and lower aquifer wells, respectively. The upper aquifer groundwater results are presented in Section 2.2.3.1 and evaluated based on groundwater quality at the upgradient plume contributions, source areas (Former Oil House Area and other secondary sources), in relation to current corrective measures (RZs and capture zone), upgradient/downgradient of closed settling lagoons, and plume migration. The lower aquifer groundwater results are presented in Section 2.2.3.2.

2.2.3.1 Upper Aquifer

2.2.3.1.1 Upgradient Contributions

Monitoring well HR-9 is located upgradient of the source area and Site. In 2011, the upgradient upper aquifer monitoring well sampled exhibited the presence of TCE, 1,1,1-TCA, 1,1-DCA, trans-1,2-DCE, and cis-1,2-DCE. The concentration of TCE was 9.1 ug/L in 2011.

Two key observations can be made relative to upgradient groundwater quality. First, the detected VOCs are consistent with historical values for upgradient groundwater quality as indicated in the Description of Current Conditions (DOCC) (Geraghty & Miller, Inc. 1991 and 1997b) and RFI Reports (ARCADIS Geraghty & Miller, Inc. 2000a and 2000b) for the former Moraine Facilities (including the 1999 baseline sampling results). This confirms that upgradient sources of VOCs not related to former GM operations continue to exist in the local area. The highest VOC concentrations upgradient to the Site are 1,1,1-TCA, TCE and the breakdown products 1,1-DCA, cis-1,2-DCE, and trans-1,2-DCE, suggesting that the upgradient releases have been migrating long enough to allow for degradation of the chlorinated VOCs 1,1,1-TCA, PCE, and/or TCE to occur. Second, the types of VOCs detected upgradient are similar to those detected further downgradient beneath the Site, indicating that total VOC concentrations detected beneath the Site include both upgradient (off-site) and on-site contributions.

2.2.3.1.2 Source Areas

To evaluate the source areas of VOCs at the Site, four upper aquifer monitoring wells (GM-23, GM-59, GM-60, and GM-75S) were sampled in 2011. Monitoring well GM-23 is located in the Former Oil House Area and is screened above the upper clay till. Monitoring wells GM-59 and GM-60 are located in the former Vehicle Distribution Center/former Moraine Engine building footprint. Monitoring well GM-59 is screened

above the upper clay till and GM-60 is screened above the regional clay till. Monitoring well GM-75S is located in the southwest corner of the former Moraine Assembly building and is screened at the regional clay till.

A comparison between historical VOC concentrations detected at GM-23 to 2011 VOC concentrations is discussed in Section 2.2.3.1.3.

- In 2011, concentrations of PCE, TCE, and cis-1,2-DCE were detected at elevated concentrations in wells GM-59, GM-60 and GM-75S.
 - o PCE concentrations in GM-59 had reached 750 ug/L in 2008 and subsequently have decreased to 520 ug/L in 2011. TCE concentrations in GM-59 had reached 750 ug/L in 2008, decreased to 170 ug/L in 2009 and increased to 510 ug/L in 2011. Concentrations of cis-1,2-DCE has remained consistently low in GM-59 since a detection of 41 ug/L in 2008.
 - o Concentrations of PCE and TCE in GM-60 decreased in 2011 to 620 ug/L and 810 ug/L, respectively. Concentrations of cis-1,2-DCE decreased from the concentration of 940 ug/L in 2010 to 370 ug/L in 2011.
 - o Concentrations of PCE at GM-75S decreased from 650 ug/L in 2010 to 430 ug/L in 2011. The concentration of TCE decreased from 890 ug/L in 2010 to 720 ug/L in 2011. Concentrations of cis-1,2-DCE remained consistent from 2009 to 2011.

Monitoring well GM-23 is within the zone of influence of current corrective measure (RZ-1) and the groundwater concentration trends are presented in Figure 12. The wells (GM-59, GM-60, and GM-75S) to the southeast of the Former Oil House Area are currently not addressed by ongoing corrective measures; however, this area is proposed to be addressed under final corrective measures discussed in the CMP and CMP Addendum to include a remedy to address these concentrations (ARCADIS, Inc. 2008 and 2010a).

2.2.3.1.3 Corrective Measures Performance Results

As described in Section 1.4, the RZ network consists of RZ-1, RZ-3 (East and West), and RZ-4 East. In 2011, carbon solution was introduced into the groundwater through introduction wells shown on Figures 3 and 4. Operation of the RZs was monitored through the collection of field parameter measurements, and laboratory analyses of biogeochemical indicator parameters and site-specific VOCs, according to the Site-Wide Groundwater Monitoring Plan (ARCADIS G&M, Inc. 2002) and revisions in the draft Site-Wide Groundwater Monitoring Report for 2009 (ARCADIS, Inc. 2010b). Concentrations of site-specific VOCs as related to the performance of the RZs are presented in this section. Groundwater concentration trends for the RZ performance monitoring wells are presented in Figure 12 (RZ-1), Figure 13 (RZ-3 East), Figure 14 (RZ-3 West), and Figure 15 (RZ-4 East).

RZ-1

As stated in Section 1.4, RZ-1 was installed as a corrective measure to remediate the area downgradient of the primary source area at the Site (Former Oil House Area). Three upper aquifer wells (GM-23, GM-29, and GM-28) are used to monitor the groundwater quality to evaluate the effectiveness of the RZ (Figure 12).

- PCE concentrations at GM-23 have decreased from 15,000 ug/L in 2001 to 57 ug/L in 2011. TCE concentrations have decreased from 2,200 ug/L in 2001 to 33 ug/L in 2011. Concentrations of cis-1,2-DCE have decreased from 19,000 ug/L in 2005 to 580 ug/L in 2011. Vinyl chloride concentrations have increased historically to a concentration of 4,100 ug/L in 2006 and subsequently have decreased to a current concentration of 840 ug/L in 2011. Concentrations of trans-1,2-DCE have been below detection limits since introductions began in 2000; however, concentrations peaked in 2006 at 270 ug/L and have subsequently decreased to 21 ug/L in 2011.
- Monitoring well GM-29 is upgradient to the original RZ-1 2002 addition (Section 1.4) and is within the zone of influence of carbon introductions conducted in the Former Oil House Area after RZ-1 was expanded in 2002. Concentrations of PCE and TCE have remained consistent since 2000 with current concentrations of 13 ug/L and 320 ug/L in 2011, respectively. Concentrations of cis-1,2-DCE had a peak concentration of 2,871 ug/L in 2000, and has subsequently decreased in concentrations to 470 ug/L in 2011. Concentrations for vinyl chloride have

fluctuated since introductions began in 2000, but have decreased since 2005, with a concentration of 52 ug/L in 2011.

- Monitoring well GM-28 is used for evaluating groundwater conditions downgradient of RZ-1. Concentrations of PCE, TCE, and cis-1,2-DCE have remained consistently low since peak concentrations in 1999. Vinyl chloride concentrations at GM-28 have been below detection limits except for concentrations of 12.4 ug/L and 6.5 ug/L in 2000 and 2008, respectively. Since 2008, concentrations have decreased from 6.5 ug/L to 0.57J ug/L in 2011.

RZ-3 East

As stated in Section 1.4, RZ-3 East is located south of former Moraine Engine Plant, which is downgradient and cross-gradient to the east (Figure 8) of the Former Oil House Area. Two upper aquifer wells (GM-22 and GM-21) are used to monitor the groundwater quality to evaluate the effectiveness of the RZ (Figure 13).

- GM-22 serves as an upgradient well for RZ-3 East. Since introductions began in 2000 concentrations of PCE, TCE, and cis-1,2-DCE have been consistently low. Concentrations of PCE peaked in 2008 at 5.7 ug/L and concentrations of cis-1,2-DCE peaked in 2001 at 8.5 ug/L. Concentrations of TCE reached a peak concentration of 10 ug/L in 2004. Monitoring well GM-22 was not sampled in 2011.
- Monitoring well GM-21 serves as a downgradient well for RZ-3 East. PCE concentrations in this well have consistently been below detection limits, except for 2008 when PCE was detected at a concentration of 0.56J ug/L. Concentrations of TCE in well GM-21 peaked in 2002 at 230 ug/L and have decreased to a concentration of 3.2 ug/L in 2010, with a slight increase to 19 ug/L in 2011. Concentrations of cis-1,2-DCE has fluctuated since a peak concentration of 100 ug/L in 2003, with a concentration of 9.9 ug/L in 2011.

RZ-3 West

As stated in Section 1.4, RZ-3 is located south of former Delphi Thermal Moraine. Three upper aquifer wells (East, GM-6, and GM-8) are used to monitor the groundwater quality to evaluate the effectiveness of the RZ (Figure 14).

- Monitoring well East serves as the upgradient well for RZ-3 West. Concentrations of PCE and TCE have decreased in East since peaking at 61.0 ug/L in 1999 and

97.2 ug/L in 2000, respectively. The concentrations of cis-1,2-DCE have fluctuated with a peak of 77.3 ug/L in 2000 and most recent concentration of 4.1 ug/L in 2006. Monitoring well East was not sampled in 2011.

- Monitoring well GM-6 serves as a downgradient well for RZ-3 West. Concentrations of PCE and TCE have decreased in GM-6 from 81.4 ug/L and 78 ug/L in 1999 to below detection limits in 2011. Concentrations of cis-1,2-DCE and vinyl chloride have fluctuated since 1999, with peak values of 52.9 ug/L in 1999 and 12 ug/L in 2002, respectively. Current concentrations of cis-1,2-DCE and vinyl chloride are 3.7 ug/L and 1.5 ug/L, respectively, in 2011.
- Monitoring well GM-8 also serves as a downgradient well for RZ-3 West. Concentrations of PCE, TCE, and cis-1,2-DCE have remained consistently low or below detection limits since 2000. Concentrations of vinyl chloride have fluctuated and remain at a low concentration or below detection limit since 2007 with a current concentration of 0.24J ug/L in 2011.

RZ-4 East

As stated in Section 1.4, RZ-4 East was designed to address VOC impacts identified west of RZ-3 West (Figure 15).

- Monitoring well GM-19S serves as the downgradient well for RZ-4 East. Concentrations of PCE and TCE have been at low concentrations or below detection limits since 2007. Concentrations of cis-1,2-DCE have been at low concentrations or below detection limits since 2007, with a slight increase to 5.3 ug/L in 2011. Concentrations of vinyl chloride reached a peak concentration of 12 ug/L in 2011.

2.2.3.1.4 Closed Settling Lagoon Monitoring Results

Groundwater quality is monitored upgradient and downgradient of the closed North and South Settling Lagoons as described in Section 2.1. Upgradient monitoring wells used for the North Settling Lagoon is HR-4 and for South Settling Lagoon is HR-17 (Figure 2). Wells downgradient of the closed North (W-2-N, W-3-N, W-4-N) and South (W-2-S, W-3-S, W-4-S) Settling Lagoons (closed through in-situ solidification and installation of a cover system in 2001, after the 1999 baseline sampling event) were sampled for both the site-wide groundwater monitoring and post-closure monitoring programs.

North Settling Lagoon

- Concentrations of PCE, TCE and daughter products at HR-4 have been low or below detection limits since 1999.
- Concentrations of PCE, TCE, and daughter products at W-2-N have been low or below detection limits since 1999.
- Concentrations of PCE and TCE at W-3-N have been generally decreasing since peak values in 2001 at 9.0 ug/L and 2.1 ug/L, respectively. Current concentrations of PCE and TCE are low or below detection limits in 2011. Concentrations of cis-1,2-DCE had a peak concentration of 291 ug/L in 1999 and has been generally decreasing to a current concentration of 53 ug/L in 2011. Vinyl chloride had a peak concentration of 24.0 ug/L in 2000 and has a current concentration of 2.7 ug/L in 2011.
- Concentrations of PCE and vinyl chloride at W-4-N have been low or below detection limits since 1999. Concentrations of TCE had a peak concentration of 15 ug/L in 2009 and decreased to 9.9 ug/L in 2011. Concentrations of cis-1,2-DCE had a peak concentration of 9.7 ug/L in 2011.

South Settling Lagoon

- Concentrations of PCE and TCE at HR-17 increased to 110 ug/L and 57 ug/L, respectively, in 2011. Concentrations of cis-1,2-DCE peaked at 7.1 ug/L in 2004 and have been generally decreasing to a current concentration below the detection limit in 2011. Vinyl chloride has been below the detection limit since 1999.
- Concentrations of PCE, cis-1,2-DCE, and vinyl chloride in W-2-S have been low or below detection limits since 1999. Concentrations of TCE peaked to 7.1 ug/L in 2011.
- Concentrations of PCE, TCE, cis-1,2-DCE, and vinyl chloride in W-3-S have been low or below detection limits since 1999. PCE, TCE, and cis-1,2-DCE were detected in 2011 at concentrations of 2.8 ug/L, 2.6 ug/L, and 0.72J ug/L, respectively.

- Concentrations of PCE, TCE, and cis-1,2-DCE in W-4-S have slightly increased since 1999 from 30.5J ug/L, 14.7J ug/L, and 4.4 ug/L, respectively, to current concentration of 31 ug/L, 21 ug/L, and 8.9 ug/L, respectively in 2011. Concentrations of vinyl chloride have been below the detection limit since 1999.

2.2.3.1.5 Plume Migration

The upper aquifer plume migration from the source area (Former Oil House Area) is monitored downgradient on Site, at the property boundary, and downgradient off Site. Additional monitoring wells (GM-47, GM-50, and GM-63) were sampled in Riverview Plat neighborhood.

Downgradient On-Site

Monitoring wells GM-43 and GM-35 were sampled to monitor the plume between the source area and property boundary. Well GM-43 is located adjacent to the former Building 14 footprint, southwest of the Former Oil House Area. Well GM-35 is located south of the Waste Pile/Staging Area and upgradient of RZ-3 West (Figure 2).

- PCE concentrations in GM-43 have been generally consistent since 2004, with a current concentration of 22 ug/L. TCE concentrations have been increasing since 2004, from 100 ug/L to 180 ug/L in 2011. Concentrations of cis-1,2-DCE have decreased from a peak concentration of 220 ug/L in 2010 to 130 ug/L in 2011. Vinyl chloride has been low or below detection limit since 2004.
- PCE concentrations in GM-35 have decreased from 37 ug/L in 2010 to 17 ug/L in 2011. TCE concentrations have been generally decreasing since a peak of 270 ug/L in 2003 to 59 ug/L in 2011. Cis-1,2-DCE concentrations have been generally decreasing since a peak of 300 ug/L in 2003 to 66 ug/L in 2011. Vinyl chloride concentrations have been generally decreasing since a peak of 59 ug/L in 2003 to 7.7 ug/L in 2011.

Monitoring wells HR-2 and HR-7 are west (side-gradient) of the Former Oil House Area and south of Landfills L2 and L3. In addition, HR-7 is downgradient of the closed North Settling Lagoon. Monitoring well HR-2 is part of the annual program to monitor groundwater concentrations south of Landfill L2 and L3. Monitoring well HR-7 on the western most property boundary of the former Building 14 was added to the site-wide annual program at request of the U.S. EPA (BOW Environmental Solutions, Inc.2010).

- Concentrations of PCE, TCE, vinyl chloride at HR-2 have been low or below the detection limits since 1999. Concentrations of cis-1,2-DCE have slightly decreased since 1999 from 9.6 ug/L to 2.1 ug/L in 2011.
- Concentrations of PCE, cis-1,2-DCE, and vinyl chloride at HR-7 have been low or below the detection limits since 1999. Concentrations of TCE have slightly decreased from 9.8 ug/L in 1999 to 7.3 ug/L in 2011.

Property Boundary

Monitoring wells GM-2, GM-6, and GM-8, along with extraction well TW-2 are located at the southwestern most property boundary (Landfill L1), downgradient of the Former Oil House Area, and RZ-3 West. These wells are used to monitor the groundwater quality at the property boundary. GM-6 and GM-8 are used to monitor the performance of RZ-3 West and are discussed in Section 2.2.3.1.3.

- Concentrations of PCE in GM-2 were below detection limit in 2011. Concentrations of TCE have decreased from 82.8 ug/L in 2000 to 0.75J ug/L in 2011. Concentrations of cis-1,2-DCE reached a peak concentration of 39.2 ug/L in 2000 and has decreased since to 3.8 ug/L in 2010, with a slight increase to 9.0 ug/L in 2011. Concentrations of vinyl chloride have decreased from a concentration of 2.5 ug/L in 2010 to 0.69J ug/L in 2011.
- Concentrations of PCE, cis-1,2-DCE, and vinyl chloride at TW-2 have been low or below detection limits for the past two years. The concentrations of TCE, PCE, and cis-1,2-DCE were 5.9 ug/L, 1.2 ug/L, and 5.7 ug/L, respectively, in 2011.

Downgradient Off-Site

Monitoring wells GM-16, GM-47, and GM-50 are located west of Landfill L1 and south of the closed South Settling Lagoon. GM-47 and GM-50 are paired upper aquifer wells. GM-47 is screened just above the regional clay till and GM-50 is screened near the water table. These wells are used to monitor plume migration south of RZ-4 East and RZ-3 West, within the Riverview Plat neighborhood (northwest of intersection of Main Street and Dryden Road - Figure 2).

- Concentrations of PCE and TCE concentrations in GM-16 have decreased from concentrations of 110 ug/L and 75 ug/L, respectively, in 2010 to concentrations of 64 ug/L and 45 ug/L, respectively, in 2011. Cis-1,2-DCE concentrations have

fluctuated, with a peak concentration of 43 ug/L in 2007, and a concentration of 23 ug/L in 2011. Concentrations of vinyl chloride have been low or below the detection limit since 1999.

- Concentrations of PCE and TCE in GM-47 have decreased since 2006, from 78 ug/L and 50 ug/L, respectively, to 52 ug/L and 18 ug/L, respectively, in 2011. Concentrations of cis-1,2-DCE have fluctuated, with a peak concentration of 170 ug/L in 2007 and has decreased to 34 ug/L in 2011. Concentrations of vinyl chloride have been low or below the detection limit since 2006.
- PCE concentrations in GM-50 have fluctuated since 2006, with a peak concentration of 180 ug/L in 2006, and a current concentration of 95 ug/L in 2011. Concentrations of TCE have fluctuated since 2006, with a peak concentration of 86 ug/L in 2011. Cis-1,2-DCE concentrations have fluctuated since 2006, with a peak concentration of 130 ug/L in 2007 and has since decreased to 7.1 ug/L in 2011. Concentrations of vinyl chloride have been low or below the detection limit since 2006.

Additional off-site wells further delineate downgradient concentrations west of the Great Miami River (GM-52, GM-55, GM-65S, GM-78, GM-79, and GM-80). Concentrations of PCE have been detected in each of these monitor wells and range from 0.34J ug/L (GM-79) to 73 ug/L (GM-52) in 2011. Concentrations of TCE have been detected in monitor wells GM-52, GM-65S, GM-79, and GM-80 and range from 1.3 ug/L (GM-79) to 38 ug/L (GM-52) in 2011.

At the off-site downgradient well GM-26, which was defined for the site-wide groundwater monitoring program as the point of compliance (POC) well for the upper aquifer, no VOCs were detected in the 1999 baseline event, while PCE was detected below the MCL at 1.6 ug/L in 2011.

2.2.3.2 Lower Aquifer Groundwater Quality

This section includes a discussion of the groundwater quality in lower aquifer monitoring wells shown on Figure 6 that are part of the site-wide program. Monitoring well GM-9 located off-site downgradient was added to the site-wide annual program at request of the U.S. EPA (BOW Environmental Solutions, Inc. 2010).

In 2011, the upgradient lower aquifer monitor well HR-12 exhibited the presence of site-specific VOCs. The detected VOCs in 2011 included 1,1-DCA, cis-1,2-DCE, and

trans-1,2-DCE, suggesting that upgradient releases of chlorinated VOCs has occurred and have been migrating long enough to allow for degradation of the chlorinated VOCs 1,1,1-TCA, PCE, and/or TCE to occur. The detected VOCs in HR-12 are consistent with historical values for upgradient groundwater quality as indicated in the DOCC (Geraghty & Miller, Inc. 1991 and 1997b) and RFI Reports (ARCADIS Geraghty & Miller, Inc. 2000a and 2000b) for the former Moraine Facilities. This confirms that upgradient sources of VOCs, not related to former GM operations, continue to exist in the lower aquifer in the local area. Additionally, the types of VOCs detected upgradient are similar to those detected further downgradient beneath the Site, indicating that total VOC concentrations detected beneath the Site include both upgradient (off-site) and on-site contributions.

On-site lower-aquifer monitor wells located in the source that were part of the site-wide monitoring program in 2011 included GM-54, GM-68D, and GM-75D. Wells GM-54, GM-68D, and GM-75D were installed in 2006 to 2008. Detected VOCs in 2011 included PCE that ranged from 62 ug/L in GM-68D to 200 ug/L in GM-75D. Concentrations of TCE ranged from 2.6J ug/L in GM-54 to 180 ug/L in GM-75D. Concentrations of cis-1,2-DCE ranged from 1.5J ug/L in GM-68D to 12 ug/L in GM-75D. The area of the Site monitored by these wells is currently not addressed by corrective measures but is included in the proposed final corrective measures discussed in the CMP and CMP Addendum (ARCADIS, Inc. 2008a and 2010a).

Other on-site lower aquifer monitoring wells HR-15 (located south of the closed North Settling Lagoon) and GM-19D (located just south of RZ-4 East) were sampled in 2011. Concentrations of PCE, TCE and cis-1,2-DCE at HR-15 and GM-19D were at low concentrations or below the detection limits in 2011. Vinyl chloride was detected in 2011 at concentrations of 2.4 ug/L and 8.6 ug/L at HR-15 and GM-19D, respectively.

The off-site downgradient wells GM-11, GM-15, and GM-20D were defined for the site-wide groundwater monitoring program as the POC wells for the lower aquifer. The concentration of TCE was equal to or exceeded the MCL (5 ug/L) in wells GM-11 and GM-20D in 2011. All other detected VOCs in these POC wells were below MCLs. Off-site wells further downgradient that were sampled in 2011 included GM-9 and DN-13. Monitoring well GM-9 had a concentration of TCE of 13 ug/L in 2011. Detected concentrations of PCE, TCE, cis-1,2-DCE, and vinyl chloride at DN-13 in 2011 were 0.40J ug/L, 4.8 ug/L, 6.3 ug/L, and 1.3 ug/L, respectively. The groundwater in the vicinity and downgradient of these wells is captured in the lower aquifer capture zone well, DN-13 based on four lines of evidence: 1.) groundwater elevations are depressed at lower aquifer wells GM-11, GM-13, GM-14, GM-15 and M73C (Figure 9), 2.) vertical

gradients at well pairs GM-16/GM-15 and GM-18/GM-13 are downward (Table 10), 3.) conditions are similar to modeled conditions (Figure H-2 of the CMP), and 4.) concentrations of TCE in off-site side-gradient well GM-84 were consistent in 2011 with previous concentrations. Concentrations of cis-1,2-DCE and vinyl chloride in GM-83D were consistent in 2011 with previous concentrations.

3. Corrective Measure Performance

3.1 RZ Performance Results

A detailed assessment of the effectiveness of the RZs and the results of this monitoring are presented in Appendix D and summarized below.

- Aquifer conditions were reducing within and downgradient of the reactive zones due to the introduction of carbohydrate, as evidenced by the field parameters and biogeochemical data;
- The target compounds (PCE and TCE) were reduced to daughter products (cis-1,2-DCE and vinyl chloride) and ultimately to end products (ethene and ethane) based on the VOC and light hydrocarbon data; and
- Enhanced reductive dechlorination continued to achieve the desired reduction of VOC concentrations in groundwater.

3.2 Capture Zone Performance Results

Groundwater flow maps depicted on Figure 8 and Figure 9 were used to evaluate capture from the corrective measures (TW-2 and DN-13) at the southern end of the former Delphi Thermal Moraine site for both the upper and lower aquifers, respectively. Additionally, it should be noted that these groundwater flow maps are consistent with the flow conditions predicted by a groundwater simulation, presented on Figures 13 and 15 of the draft Groundwater Flow Model Update (Appendix D of the CMP) (ARCADIS, Inc. 2008a). Seasonal weather conditions vary throughout the year and this variation will have an impact on the groundwater elevations observed at the Site (Table 9). The observed groundwater elevations in 2011 have increased approximately 3 feet compared to the 2010 groundwater levels for both the upper and lower aquifers. This increase is consistent with the above average precipitation in 2011 (18.29 inches – Table 9). However, groundwater flow conditions across the Site have remained similar compared to September 2010. The flow rate for DN-13 was not adjusted in 2011. However, due to an observed decrease in flow rate; the well was tested to determine the cause. The pump was pulled on November 4, 2011 and the well was inspected via camera on November 7, 2011. Significant scaling was observed on the well screen from 100-140 ft bls. Based on this inspection, the well was cleaned via the bore blast method. This method uses compressed nitrogen to blast scaling off the screen and then push water and compressed nitrogen through the

filter pack to remove the scaling. The cleaning water was pumped back through the well to capture the scaling material. In addition, the pump was cleaned and refurbished. The pump was restarted November 17, 2011 with an initial flow rate was 983 gpm and subsequent readings were 1,000 gpm and 983 gpm. Similar capture has been maintained when compared to simulated flow conditions in Figures 13 and 15 of the Groundwater Flow Model Update (Appendix D of the CMP) (ARCADIS, Inc. 2008a) in both the upper and lower aquifers.

Figure 7 presents a graph of the influent concentration of total chlorinated VOCs and benzene, toluene, ethylbenzene, and xylenes (BTEX) compounds in TW-2 since start up of the recovery and treatment system in January 1996. The data shows a steady decline in total chlorinated VOCs and a significant decrease in VOC concentrations. The data indicates that the remediation at the Site is continuing to provide VOC mass reduction downgradient of RZ-3 West. The effectiveness of the TW-2 system is being evaluated to determine if the system can be shut-down in the future.

4. Corrective Active Completion Strategy

4.1 Effectiveness of Corrective Measure Activities

4.1.1 Background and Objectives

The goal of the corrective measures for groundwater at the Site is to reduce existing site-related groundwater concentrations to levels that are protective of reasonably expected future uses of groundwater. The approach for RACER Trust in achieving this goal is through a combination of the corrective measures that achieve plume migration control, reduce existing plume concentrations, and monitor performance of these measures. Once on-site groundwater concentrations are reduced sufficiently by active corrective measures (pumping and in-situ treatment) to ensure continued protection of reasonably expected groundwater uses, some, or all, of the active measures will be terminated. Groundwater monitoring will continue to verify that groundwater conditions remain acceptable, and that ultimately, groundwater concentrations at the POC defined for the upper and lower aquifers, decline below the appropriate protective levels (i.e., appropriate for the protection of the groundwater resource and its reasonably expected future uses). Data have been and will continue to be acquired during the implementation of the site-wide groundwater monitoring program to evaluate progress towards achieving this goal.

The need for continued operation of the remedial measures will be determined based on achieving and maintaining the following conditions defined in the 2002 Site-Wide Groundwater Monitoring Plan; however, new POC wells were defined in the 2008 CMP and will be used when the CMP is approved:

1. Upper aquifer: consistent with the criterion stated in the approved RCRA Corrective Action Environmental Indicator Determination – Migration of Contaminated Groundwater Under Control (CA 750), the condition to be met in the upper aquifer is no migration of VOCs at concentrations exceeding appropriate protective levels (i.e., appropriate for the protection of the groundwater resource and its reasonably expected future uses as characterized in the RFI) beyond the existing area of contaminated groundwater. Based on the groundwater conditions established during the annual sampling, the existing well GM-26 will serve as the POC monitoring points for ensuring that current conditions are maintained or improved.

2. Lower aquifer: consistent with the goal to maintain a usable aquifer, including off-site drinking water use, the condition to be met in the lower aquifer is no VOC concentrations exceeding appropriate protective levels (i.e., appropriate for the protection of the groundwater resource and its reasonably expected future uses as characterized in the RFI) beyond the existing area of contaminated groundwater. Based on the groundwater conditions established during the annual sampling events, the existing wells GM-15, GM-11, and GM-20D will serve as the POC monitoring points for ensuring that these conditions are maintained.

Once on-site groundwater concentrations are reduced sufficiently by active measures to be protective of reasonably expected future uses, some or all of these active measures will be terminated. Following termination of any active measures, RACER Trust will continue the site-wide groundwater monitoring program to confirm that the conditions in the upper and lower aquifer continue to be met without these active measures.

4.1.2 Methodology

In accordance with the Site-Wide Groundwater Monitoring Plan (ARCADIS G&M, Inc. 2002), groundwater data were compared to remediation target levels (RTLs) developed to ensure compliance with the above-stated conditions without active corrective measures. As defined in the Site-Wide Groundwater Monitoring Plan, these RTLs were calculated using the groundwater assessment methods developed in the Baseline and Supplemental Baseline Risk Assessments (ENVIRON 2000a, b) taking into consideration the current pumping conditions at and in the vicinity of the facility. Specifically, the previous MODFLOW groundwater flow model (Geraghty & Miller, Inc. 1994) developed for Delphi Thermal Moraine and the surrounding region (including former Moraine Engine and Moraine Assembly) is used to support estimation of RTLs which are concentrations in on-site groundwater at locations downgradient of the Former Oil House Area that would not be expected to result in exceedances of the MCL at the designated monitoring points.

As discussed in the 2008 CMP (ARCADIS, Inc. 2008a), the MODFLOW groundwater flow model developed for the Site was updated to reflect changes in on-site pumping conditions and the refined hydrogeologic conceptual site model. In particular, due to the cessation of operations at the former Moraine Assembly facility in December 2008, production wells 11B and 12A are inactive. The MODFLOW model was updated to reflect flow conditions with wells 11B and 12A no longer operating (model scenario "1A" as defined in the CMP [ARCADIS, Inc. 2008a]). Additional details regarding the

refinements made to the Groundwater Flow Model are provided in Appendix D of the 2008 CMP (ARCADIS, Inc. 2008a).

Using this approach and considering the scope of the annual groundwater monitoring program, RACER Trust developed RTLs for the following remediation monitoring zones in both the upper and lower aquifer at and downgradient of the Former Oil House Area:

- Upper Aquifer
 - Former Oil House Area, (AOI 7 Shallow): the Former Oil House Area source area (wells GM-23, GM-29 and GM-30),
 - Zone S1: the monitoring zone immediately downgradient of RZ-1 (well GM-28),
 - Zone S1 to Zone S2: the monitoring zone between RZ-1 and RZ-2 (wells GM-28, and ME-6),
 - Zone S2: the monitoring zone immediately downgradient of RZ-2 (wells ME-6, ME-3, GM-31),
 - Zone S2 to Zone S3: the monitoring zone between RZ-2 and RZ-3 (wells ME-6, ME-3, GM-31, GM-22, GM-33, GM-35, W-4-S),
 - Zone S3: the monitoring zone immediately downgradient of RZ-3 (wells GM-32, GM-21, GM-63, and GM-64),
 - Zone S3 to GM-10: the monitoring zone between RZ-3 and GM-10 (wells GM-32, GM-21, GM-8, GM-6, GM-2, GM-16, GM-18, WSU-24, GM-47, GM-50, GM-51, GM-63, GM-64),
 - GM-10/GM-52: the monitoring zone downgradient of RZ-3 (wells GM-10 and GM-52), and
 - POC Shallow: monitoring at well GM-26.

- Lower Aquifer
 - Former Oil House Area, (AOI 7 Deep): the Former Oil House Area source area (wells GM-23, GM-29, and GM-30),
 - Zone GM-40/41/54: the monitoring zone encompassing GM-40, GM-41 and GM-54,
 - Zone GM-42: the monitoring zone encompassing GM-42,
 - Zone D1: the monitoring zone encompassing GM-19D,
 - Zone D2: the monitoring zone encompassing wells GM-1 and GM-3, and

- POC Deep: monitoring at wells GM-11, GM-15 and GM-20D.

The following steps were conducted to assess the site-wide monitoring data for the purpose of determining the extent to which each remedial measure is contributing to achievement of the conditions outlined above for the upper and lower aquifers:

- As discussed above, the groundwater flow model was updated in 2008 to reflect current pumping conditions. The pumping conditions are summarized on Table E-1 in Appendix E. Table E-1 also provides the source reduction factors calculated from the groundwater flow model that are used to assess hypothetical concentrations at receptor wells that are attributable to the land-based units (i.e., closed North and South Settling Lagoons, and Landfills L1, L2 and L3). The RTLs, updated in the CMP to reflect these current pumping conditions at and in the vicinity of the Site, are presented on Table E-2 in Appendix E.
- Minimum, mean and maximum constituent concentrations in each remediation monitoring zone were calculated based on data collected during the 2011 monitoring period. One-half sample quantitation limits were used for non-detect results.
- Minimum, mean and maximum constituent concentrations were compared against the RTLs developed for each remediation monitoring zone.

4.1.3 Results

The results for groundwater quality data collected in all groundwater monitoring events in 2011 in each remediation monitoring zone wells are discussed in Section 2.2.3.1.3. A comparison of the minimum, mean and maximum concentrations for each parameter in each remediation monitoring zone to the RTLs is presented on Table 11. These results and relative change in these results in comparison with the 2008 monitoring period are discussed below and presented on Table 11. For reference, Table 11 also presents a comparison with the results from the 1999 baseline sampling event.

Note that changes to the groundwater monitoring program were implemented in 2011 as described in the Site-Wide Annual Groundwater Report for 2009 (ARCADIS, Inc 2010b). Changes included reducing the frequency of sampling for certain monitoring wells where other downgradient wells are available to monitor overall corrective measures performance. As result, no data are available from the 2011 monitoring

event for the following remediation monitoring zones: Zone S2 (Shallow), GM-42 (Deep), Zone D2 (Deep). Monitoring wells which have a reduced sampling frequency are denoted in *italics* in the performance review presented below.

The comparison of the 2011 shallow zone (upper aquifer) monitoring data with the RTLs indicates the following:

AOI 7, Shallow (wells GM-23, GM-29 and GM-30):

- Consistent with 2009 and 2010, concentrations of 1,1-DCE, cis-1,2,-DCE, PCE and TCE remained below the RTLs.
- As compared with 2010, the concentrations of vinyl chloride increased and remain above the RTL. The ratio of the mean to the RTL is equivalent to that calculated in 2009.

Zone S1 (well GM-28):

- Consistent with 2009 and 2010, all concentrations remain below the RTLs.

Zone S1 to S2 (wells GM-28, ME-6):

- Consistent with 2009 and 2010, all concentrations remain below the RTLs.

Zone S2 (wells ME-6, ME-3, GM-31):

- The monitoring frequency for wells ME-6, ME-3 and GM-31 located in Zone S2 was modified to once every five years. Therefore, no sampling data are available from 2011 for this remediation monitoring zone.

Zone S2 to S3 (wells W-4-S, ME-6, ME-3, GM-31, GM-22, GM-33, GM-35):

- Consistent with 2009 and 2010, the concentrations of 1,1-DCE, cis-1,2,-DCE, PCE and vinyl chloride remain below RTLs.
- As compared with 2010, the maximum 2011 concentration of TCE is approximately half the concentration detected in 2010. The minimum and mean are correspondingly less than the 2010 concentrations. Only the maximum concentration is above the RTL; the mean is now below the RTL.

Zone S3 (wells GM-32, GM-21, GM-63, and GM-64):

- Consistent with 2009 and 2010, the concentrations of 1,1-DCE, cis-1,2-DCE, and vinyl chloride remain below the RTLs.
- The minimum, mean, and maximum concentrations of PCE and TCE are well below the 2010 maximum detected concentrations. None of the 2011 concentrations are above the RTLs.

Zone S3 to GM-10 (wells GM-32, GM-21, GM-8, GM-6, GM-2, GM-16, GM-18, WSU-24, GM-47, GM-50, GM-51, GM-63, and GM-64):

- Wells GM-18, WSU-24, GM-51, and GM-64 are currently sampled every five years. Therefore no sampling data are available from the 2011 event for these wells.
- Consistent with 2009 and 2010, the concentrations of 1,1-DCE, cis-1,2-DCE, and vinyl chloride remain below the RTLs.
- The maximum concentrations of TCE and PCE are lower higher than those reported in 2010. The minimum, mean and maximum concentrations of PCE are above the RTLs. The maximum TCE concentration is above the RTL and the mean is equal to the RTL.

GM-10/GM-52 (wells GM-10 and GM-52):

- Well GM-10 is currently sampled every five years. Therefore no sampling data are available from the 2011 event for this well. Groundwater sampling data in 2011 are available for well GM-52.
- Consistent with 2009 and 2010, the concentrations of 1,1-DCE, cis-1,2-DCE and vinyl chloride remain below RTLs.
- The concentrations of PCE and TCE were slightly less than the concentrations measured in 2010, although they are above the RTLs.

POC Shallow (well GM-26):

- Consistent with 2010, all concentrations remain below the RTLs.

The comparison of the 2011 deep zone monitoring data with the RTLs indicates the following:

AOI 7, Deep (wells GM-23, GM-29, and GM-30):

- Consistent with 2009 and 2010, the concentrations of 1,1-DCE, cis-1,2-DCE and PCE remain below the RTLs.
- The maximum and mean concentrations of TCE and vinyl chloride increased in 2011. The ratios of the mean and maximum TCE concentrations to the RTL have remained the same, albeit above the RTL. The ratios of the mean and maximum vinyl chloride concentrations have increased and still remain above the RTL.

Zone GM-40/41/54 (wells GM-40, GM-41, GM-54):

- Wells GM-40 and GM-41 are currently sampled every five years. Therefore no sampling data are available from 2011 for these wells.
- Consistent with 2009 and 2010, the concentrations of 1,1-DCE, cis-1,2-DCE, TCE, and vinyl chloride remained below the RTLs. The maximum concentration of PCE is slightly lower than that measured in 2010, and remains above the RTL.

GM-42 (well GM-42):

- Wells GM-42 is currently sampled every five years. Therefore no sampling data are available from 2011 for this remediation monitoring zone.

Zone D1 (well GM-19D):

- Consistent with 2009 and 2010, concentrations of 1,1-DCE, cis-1,2-DCE, PCE, and TCE remain below the RTLs.
- As compared with 2010, the detected concentration of vinyl chloride has decreased, although it remains above the RTL.

Zone D2 (wells GM-1 and GM-3):

- Wells GM-1 and GM-3 are currently sampled every five years. Therefore no sampling data are available from 2011 for this remediation monitoring zone.

POC Deep (wells GM-11, GM-15 and GM-20D):

- Consistent with 2009 and 2010, concentrations of 1,1-DCE, cis-1,2-DCE, PCE and vinyl chloride remain below RTLs.
- In comparison with the 2010 data, the minimum, mean and maximum concentrations of TCE have decreased, and only the mean and maximum remain above the RTL.

As indicated by the comparison of groundwater monitoring data with the RTLs presented on Table 11, concentrations at the upper aquifer POC well remain below RTLs. Concentrations in the monitoring zone immediately upgradient of the upper aquifer POC remain stable and above RTLs since 2006. Concentrations in the monitoring zones further upgradient of the upper aquifer POC, as well as concentrations at the lower aquifer POC wells remain above the RTLs for one constituent (TCE). Therefore, active corrective measures are still required to maintain the short-term objective in the upper aquifer, and to achieve the short-term corrective action objective in the lower aquifer.

Concentrations in the AOI 7 area remain above levels necessary to achieve the RTLs at the downgradient upper and lower aquifer POCs. However, concentrations immediately downgradient of RZ-1 remain below the RTLs, thus indicating that RZ-1 has been effective at remediating groundwater impacts from AOI 7 in the upper aquifer. Continued corrective measures downgradient of RZ-1 (i.e., at RZ-3 and RZ-4) will be continued to address residual impacts in the downgradient upper aquifer plume area. The CMP submitted in August 2008 also proposes additional measures along the plume to improve the performance of the overall remedy (ARCADIS Inc. 2008a).

4.2 Monitoring of Land-Based Waste Management Units

4.2.1 Background and Objectives

One additional component of the site-wide groundwater monitoring program is monitoring of other specific units (i.e., the closed lagoons). Although the RFI, Supplemental RFI and CMP, determined that the wastes at these units do not contribute constituents to groundwater at levels that would have a significant effect on

current and reasonably expected future groundwater uses, the monitoring program includes monitoring wells that are used to confirm these findings. In addition, the Site-Wide Groundwater Monitoring Plan was developed to meet the objectives of the Ohio EPA post-closure monitoring for the closed North and South Settling Lagoons.

4.2.2 Methodology

As indicated above, this site-wide monitoring program was developed to meet the objectives of RCRA corrective action and the post-closure groundwater monitoring requirements for the closed lagoons. The site-wide program monitors potentially significant contributions of hazardous waste constituents to existing groundwater quality from the closed lagoons. To determine if the closed lagoons may be significant contributors of hazardous waste constituents to existing groundwater concentrations, monitoring data collected from the designated post-closure monitoring wells located downgradient of each of the closed lagoons are evaluated for temporal trends. The approach proposed in the Site-Wide Groundwater Monitoring Plan for this assessment includes, as an initial approach, the application of straight line regression to determine if the data suggests a strong positive correlation.

In addition, in accordance with the Site-Wide Groundwater Monitoring Plan, the monitoring wells located immediately downgradient of the in-place waste management units are evaluated to determine whether these units are significantly affecting groundwater quality. Specifically, the potential health significance of constituents detected in monitoring wells immediately downgradient of these units to current and reasonably expected groundwater uses on-site and off-site are evaluated using the groundwater assessment methods developed in the Supplemental RFI Baseline Risk Assessment (ENVIRON 2000b) and CMP (ARCADIS, Inc. 2008a). If this evaluation identifies detected concentrations that indicate one or more of these units may be having a potentially significant impact on downgradient groundwater quality, then a review of groundwater quality from monitoring wells upgradient and downgradient of the particular unit would be conducted to identify whether the unit is affecting groundwater quality. The monitoring wells identified in the Site-Wide Groundwater Monitoring Plan for monitoring each of the waste management units are:

- Closed North Settling Lagoon: HR-4 (upgradient), W-2-N, W-3-N, W-4-N.
- Closed South Settling Lagoon: HR-17 (upgradient), W-2-S, W-3-S, W-4-S.
- Landfill L1: GM-2, GM-6, 4S.

- Landfill L2: W-4-N, HR-2, HR-3.
- Landfill L3: W-4-N, HR-2, HR-4.

Consistent with the groundwater exposure evaluation conducted for the Supplemental Baseline Risk Assessment (ENVIRON 2000b) and CMP (ARCADIS, Inc. 2008a), groundwater concentrations reported for each set of downgradient monitoring wells are assumed to represent source concentrations associated with each unit. These source concentrations are combined with source reduction factors developed for the base case exposure scenario (i.e., current groundwater use conditions without corrective measures pumping – “Scenario 1a”) to estimate exposure concentrations at the points of groundwater use (e.g., downgradient municipal well fields) or potential receptor exposure (e.g., Great Miami River). For the current evaluation, the maximum concentrations detected during the 2009 sampling events in each set of designated monitoring wells are used as the source concentrations and combined with the source reduction factors presented on Table E-1 (as described in Section 4.1.2) in order to estimate exposure concentrations. The estimated exposure concentrations are then compared with MCLs or risk-based equivalent drinking water levels (EDWLs) (“drinking water criteria”) in order to assess the potential health significance associated with receptor exposure to these concentrations.

4.2.3 Results

As proposed in the Site-Wide Groundwater Monitoring Plan (ARCADIS G&M, Inc. 2002), post-closure monitoring data collected from those wells assigned to the closed North and South Settling Lagoons were reviewed for temporal trends. Data considered in the evaluation included results through the September 2011 monitoring event and data ranging back to the initial post-closure monitoring event conducted in November 2001. Currently, the data set collected since the lagoons were closed includes eleven¹ data points for any monitoring well/constituent pair. The data plots for key constituents are provided on Figure E-1 for the closed North Settling Lagoon (NSL) and Figure E-2 for the closed South Settling Lagoon (SSL).

As presented on Figure E-1, the linear regression analysis for the monitoring wells used to assess conditions at the NSL suggest increasing concentrations of trans-1,2-

¹ With the exception of W-4-S which contains fifteen data points for each constituent.

DCE in downgradient well W-2-N, and 1,1-DCA in downgradient well W-4-N. In each of these cases, the slope is positive and the linear regression had a correlation coefficient (R^2) greater than 0.5. There were increasing concentrations of 1,1-DCA and cis-1,2-DCE in well HR-4. As provided for in the Site-Wide Groundwater Monitoring Plan (ARCADIS Inc. 2002), further assessment of these trends was performed using the Mann-Kendall trend test. The results of the trend tests are provided on Table E-5. The results of this test indicate a statistically significant increasing trend for 1,1-DCA concentration in upgradient well HR-4. The increasing trend for 1,1-DCA in downgradient well W-4-N was also found to be statistically significant (see Table E-5), as well as a trend for cis-1,2-DCE that was not identified by the linear regression. The results indicate that the trends for cis-1,2-DCE in HR-4 and trans-1,2-DCE concentrations in W-2-N are not statistically significant. Therefore, these data and concentration trends do not indicate any significant increases in groundwater concentrations of cis- or trans-1,2-DCE that would be attributable to the NSL.

In summary, the NSL data indicate a statistically significant increasing trend in cis-1,2-DCE and 1,1-DCA in downgradient monitoring well W-4-N. It is important to note that there is statistical evidence that the concentrations of 1,1-DCA in W-4-N are correlated with the concentrations in HR-4. Pearson correlation coefficients were used to test the hypothesis that there is no correlation between the 1,1-DCA concentrations in these two wells. The hypothesis was rejected. A similar test was contemplated for cis-1,2-DCE, but the test could not be carried out due to the high frequency of non-detections. Three observations suggest a source other than the NSL for 1,1-DCA and cis-1,2-DCE in monitoring well W-4-N:

- the statistical correlation of concentrations of 1,1-DCA between monitoring well W-4-N and the background well HR-4,
- the absence of detections of 1,1-DCA or cis-1,2-DCE above drinking water standards, and
- the fact that both constituents are daughter products of other constituents that have been detected upgradient of the NSL.

As presented on Figure E-2, the linear regression analysis for the monitoring wells used to assess conditions at the SSL suggest increasing concentrations of 1,1-DCA, cis-1,2-DCE, trans-1,2-DCE, PCE and TCE in downgradient monitoring well W-4-S, and increasing concentrations of TCE in upgradient monitoring well HR-17. As provided for in the Site-Wide Groundwater Monitoring Plan (ARCADIS, Inc. 2002),

further assessment of these trends was performed using the Mann-Kendall trend test. The results of the trend tests are provided on Table E-5. The results confirmed that all five of the correlated increases identified in the linear regressions -- the trends for 1,1-DCA, cis-1,2-DCE, trans-1,2-DCE, PCE, and TCE in W-4-S and TCE in well HR-17 -- are statistically significant (see Table E-5). The Mann-Kendall test indicated that the increasing trend for PCE in HR-17 was statistically significant, but the correlation coefficient (R^2) was 0.4851, just below the 0.5 criterion.

The detected concentrations for TCE and PCE, and the observed concentration increases identified in downgradient monitoring well W-4-S appear to correlate with the concentrations and increasing trends also observed in upgradient well HR-17. The correlations between concentrations in HR-17 and W-4-S for TCE and PCE were tested statistically using Pearson correlation coefficients and were found to be correlated at the 5% significance level. This correlation suggests a source other than the SSL for the TCE and PCE increases. Although the concentrations for trans-1,2-DCE and 1,1-DCA in wells W-4-S and HR-17 are not statistically correlated, the concentrations are still below applicable drinking water standards. Further, the presence of 1,1-DCA, cis-1,2-DCE and trans-1,2-DCE is expected from the natural attenuation processes. Therefore, concentrations downgradient of the SSL are most likely due to upgradient groundwater impacts rather than being attributable to the SSL. The significance of the detected concentrations is evaluated further below.

Using the methodology developed in the Supplemental RFI baseline risk assessment (ENVIRON 2000b) and CMP (ARCADIS Inc. 2008a) for assessing potential impacts to groundwater receptors from releases at the Moraine Facilities, RACER Trust determined that the data from the wells downgradient of the closed NSL and SSL do not indicate that these units are significantly affecting groundwater quality. The potential significance of concentrations detected during the 2011 sampling events in each set of downgradient monitoring wells for the lagoons and landfills were assessed. Based on the maximum concentrations detected during the 2011 sampling events at each of these units², exposure concentrations at water supply wells representing current pumping conditions were estimated. The estimated combined groundwater concentrations at each of the receptor locations are presented on Table 12 in

² If one or more monitoring wells downgradient of a land-based unit was not sampled in 2011, and a constituent was not detected in the remaining wells in that set in 2011, then the maximum of the most recent concentrations detected at those wells was conservatively used as the groundwater exposure concentration for that unit.

comparison with drinking water criteria. As shown on Table 12, the maximum concentrations detected downgradient of each of the land-based waste disposal units do not contribute significantly to concentrations at these points of potential exposure. Therefore, the data from the wells downgradient of the waste management units indicate that these units are not significantly affecting groundwater quality. Supporting calculations for this assessment are provided in Appendix E.

5. Conclusions and Recommendations

This site-wide report presents the groundwater monitoring activities completed in 2011 at the RACER Trust Moraine Facilities located in Moraine, Ohio. This sampling was conducted to meet the five objectives presented in Section 1.2. Compliance with these objectives is presented for the waste management units, corrective measures, and on-going site-wide groundwater monitoring in the following sections.

5.1 Land-Based Waste Management Units

As proposed in the Site-Wide Groundwater Monitoring Plan (ARCADIS G&M, Inc. 2002), monitoring data collected immediately downgradient of the closed North and South Settling Lagoons, and Landfills L1, L2 and L3 were evaluated to determine if these units may be contributing constituents to groundwater at levels that would have a significant effect on current and reasonably expected future groundwater uses. Using the methodology developed in the Supplemental RFI baseline risk assessment (ENVIRON 2000b) and CMP (ARCADIS, Inc. 2008a) for assessing potential impacts to groundwater receptors from releases at the Moraine facilities, the potential significance of observed groundwater concentrations downgradient of these units was evaluated.

This evaluation determined that data from the wells downgradient of the in-place waste management units indicate that these units are not significantly affecting groundwater quality. Based on the results from the 2011 monitoring, no changes in the monitoring program for the waste management units are proposed.

5.2 Corrective Measures Performance

The approach for RACER Trust in achieving its corrective action goals for the former Moraine Facilities is based on a combination of corrective measures (in-situ treatment and hydraulic control) designed to reduce existing plume concentrations thereby achieving plume reduction and migration control.

5.2.1 In-Situ Treatment

Groundwater quality monitoring at and downgradient of the reductive dechlorination treatment zones indicates that this in-situ treatment program has been effective at reducing VOC concentrations in groundwater. As observed during the 2011 monitoring, the upper aquifer conditions in the areas downgradient of the in-situ reactive zones have been converted to more reducing conditions through the

introduction of a carbon source, as evidenced by the changes in field and bioattenuation indicator parameters. Further, the VOC results indicate that the target compounds (PCE and TCE) have been effectively reduced to daughter products (cis-1,2-DCE and vinyl chloride) and ultimately to ethene and ethane.

In general, the process of enhanced reductive dechlorination has been successful in achieving a reduction of VOC concentrations downgradient of source areas. Based on the data collected in 2011 as part of the site-wide groundwater monitoring program and the effectiveness of the remedy in place RACER Trust will address current concentrations by modifications of the RZs as presented in the CMP and CMP Addendum (ARCADIS Inc., 2008a and 2010a). The current RZs will continue to be implemented and evaluated in 2012 as in 2011, until modifications are implemented for the final site-wide remedy. As part of the design, the draft Pre-Design Investigation Work Plan was submitted to the U.S. EPA on November 5, 2010 and modified on November 7, 2011. Use of RZ-4 West will be evaluated as part of the future corrective measures for the Site. The initial phase of an intrusive investigation into Landfill L1 was completed in November and December 2011 as outlined in the Landfill L1 Investigation Work Plan, approved by U.S. EPA on November 1, 2011. The findings from the work associated with the Landfill L1 Investigation Work Plan will assist in evaluating future corrective measures for the Site.

5.2.2 Hydraulic Control

Groundwater elevation monitoring indicates that the capture zone corrective measures continue to be effective at maintaining hydraulic control in both the upper and lower aquifers in the southern area of the former Delphi Thermal Moraine. Additionally, the observed flow conditions are consistent with the conditions predicted by the capture zone modeling completed in developing the corrective measures pumping plan, which confirms the continued utility of the groundwater flow model as a predictive tool.

Based on the effective performance of the pumping program during the 2011 monitoring and exceedances of RTLs at the Former Oil House Area AOI 7, in shallow aquifer Zones S2 to S3, S3, S3 to GM-10/-52, GM-10/-52, deep aquifer Zones GM-40/-41/-54, D1, and POC monitoring points in the deep aquifer (GM-11, GM-15, GM-20D), RACER Trust will address current concentrations in the lower aquifer by modifications of the pumping program (pump & treat and DN-13 capture) as presented in the CMP and CMP Addendum (ARCADIS Inc., 2008a and 2010a). The current pumping program will continue to be implemented and evaluated in 2012 as in 2011 until modifications are implemented for the final site-wide remedy. The effectiveness of the

TW-2 system is being evaluated to determine if the system can be shut-down in the future.

The ongoing groundwater monitoring program includes the assessment of changes in site-specific VOCs in both the upper and lower aquifers at locations upgradient of the former Moraine Facilities, as well as on-site and downgradient of the former facilities. Data collected from upper and lower aquifer wells located upgradient of the former facilities confirms that upgradient sources of VOCs, not related to former GM operations, persist in the local area. Notwithstanding these upgradient contributions of VOCs to on-site groundwater, the monitoring data indicate a site-wide decrease in VOC concentrations since the baseline sampling event conducted in 1999, other than areas to be addressed as proposed in the CMP. In addition, VOC concentrations at the current off-site downgradient upper aquifer POC well GM-26 remained below drinking water criteria. Concentrations of TCE remained above the drinking water criterion in downgradient lower aquifer well GM-11; however, groundwater downgradient of this well is contained by the lower aquifer capture zone well DN-13.

The overall decreasing concentrations in the wells downgradient of the Site since the corrective measures were first implemented are likely attributable to the combined effects of corrective measures pumping at TW-2 which began in January 1996, pumping at DN-13, and on-going enhanced reductive dechlorination of the VOCs. However, concentrations in the monitoring zones immediately upgradient of the upper aquifer POC (GM-26), as well as concentrations at the lower aquifer POC wells remain above the RTLs and MCLs. Therefore, active corrective measures are still required to achieve the corrective action objectives presented in the CMP. These POC wells were presented in the 2002 Site-Wide Groundwater Monitoring Plan; however, new POC wells were defined in the 2008 CMP and will be used when the CMP is approved.

Based on the evaluation of the site-wide groundwater quality, both the in-situ treatment and hydraulic control components of the corrective action program will be enhanced and or modified and continued.

5.3 Reassessment of Site-Wide Groundwater Monitoring Program

In accordance with the Site-Wide Groundwater Monitoring Plan (ARCADIS G&M, Inc. 2002), groundwater monitoring was completed in 2011 to evaluate groundwater quality upgradient and downgradient of the closed lagoons and landfills, performance of the in-situ reactive zones, and performance of the capture zones. Based on the data collected during the 2011 monitoring period, RACER Trust believes that the monitoring

program has provided sufficient data for a comprehensive evaluation of the current corrective action objectives. To reassess the monitoring program in support of the proposed final corrective measures, RACER Trust recommends the following:

- The revised site-wide groundwater monitoring program for 2011 was presented in Table 21 of the Site-Wide Groundwater Monitoring Report for 2009 (ARCADIS, Inc. 2010b). This list of wells was based on an evaluation of data trends observed at each monitor well since 1999. This monitoring program will be followed in 2012 to include upper aquifer wells HR-7 and GM-9 at the request of the U.S. EPA (BOW Environmental Solutions, Inc. 2010). In addition, wells GM-1, GM-42, GM-63, GM-83S, and HR-16 will be included in the site-wide groundwater monitoring program for 2012 due to increased concentrations at HR-17 and W-4-S that were not attributed to the closed South Settling Lagoon.
- RACER Trust will present future revisions to the site-wide groundwater monitoring program in support of the final site-wide corrective measures when the Statement of Basis is finalized.

6. References

- ARCADIS, Inc., 2011a. Draft Amended Quality Assurance Project Plan for RCRA Corrective Action, RACER Trust, Moraine, Ohio. November 28, 2011.
- ARCADIS, Inc., 2011b. Draft Site-Wide Groundwater Monitoring Report for 2010, Motors Liquidation Company, Moraine, Ohio. February 28, 2011.
- ARCADIS, Inc. 2010a. Draft Corrective Measures Proposal Addendum, Motors Liquidation Company, Moraine, Ohio. March 22, 2010.
- ARCADIS, Inc., 2010b. Draft Site-Wide Groundwater Monitoring Report for 2009, Motors Liquidation Company, Moraine, Ohio. February 26, 2010.
- ARCADIS, Inc. 2010c. Vapor Intrusion Verification Work Plan, Motors Liquidation Company, Moraine, Ohio. September 16, 2010.
- ARCADIS, Inc. 2010d. Draft Amended Quality Assurance Project Plan, Motors Liquidation Company, Moraine, Ohio. November 19, 2010.
- ARCADIS, Inc., 2009. Draft Site-Wide Groundwater Monitoring Report for 2008, General Motors Corporation, Moraine, Ohio. February 2009.
- ARCADIS, Inc., 2008a. Draft Corrective Measures Proposal, General Motors Corporation, Moraine, Ohio. August 2008.
- ARCADIS, Inc., 2008b. Draft Site-Wide Groundwater Monitoring Report for 2007, General Motors Corporation, Moraine, Ohio. February 2008.
- ARCADIS, Inc., 2007. Draft Site-Wide Groundwater Monitoring Report for 2006, General Motors Corporation, Moraine, Ohio. February 2007.
- ARCADIS, Inc., 2006. Draft Site-Wide Groundwater Monitoring Report for 2005, General Motors Corporation, Moraine, Ohio. February 2006.
- ARCADIS G&M, Inc., 2005. Draft Site-Wide Groundwater Monitoring Report for 2004, General Motors Corporation, Moraine, Ohio. March 2005.

ARCADIS G&M, Inc., 2004. Draft Site-Wide Groundwater Monitoring Report for 2003, General Motors Corporation, Moraine, Ohio. February 2004.

ARCADIS G&M, Inc., 2003. Draft Site-Wide Groundwater Monitoring Report for 2001/2002, General Motors Corporation, Moraine, Ohio. June 2003.

ARCADIS G&M, Inc., 2002. Site-Wide Groundwater Monitoring Plan, General Motors Corporation, Moraine, Ohio. May 2002.

ARCADIS Geraghty & Miller, Inc., 2000a. Resource Conservation and Recovery Act Facility Investigation Report - Volume I (Methodologies and Results) Delphi Harrison Thermal Systems, General Motors Corporation, Moraine, Ohio. April 2000.

ARCADIS Geraghty & Miller, Inc., 2000b. Supplemental RFI - Volume I (Methodologies and Results) General Motors Powertrain Group Moraine Engine Plant and General Motors Truck Group Moraine Assembly Plant, Moraine, Ohio. April 2000.

ARCADIS Geraghty & Miller, Inc., 2001. Draft Interim Measures/Corrective Measures Report, General Motors Corporation, Moraine, Ohio. March 2001.

BOW Environmental Solutions, Inc. 2010. Quality Assurance Project Plan – Response to Comments, Motors Liquidation Company, Moraine, Ohio. August 20, 2010.

BOW Environmental Solutions, Inc., 2007a. Revised Supplemental Groundwater Investigation Work Plan, General Motors Corporation, Moraine, Ohio. March 16, 2007.

BOW Environmental Solutions, Inc., 2007b. Revised Supplemental Groundwater Investigation, General Motors Corporation, Moraine, Ohio. June 25, 2007.

BOW Environmental Solutions, Inc., 2007c. Revised Supplemental Groundwater Investigation Work Plan, No. 2, General Motors Corporation, Moraine, Ohio. October 1, 2007.

CH₂M Hill, Inc., 1986. Environmental Protection Program Plan Report for the City of Dayton, Ohio, August 1986.

- ENVIRON Corporation, 2000a. RCRA Facility Investigation Final Report Volume II (Baseline Risk Assessment), Delphi Harrison Thermal Systems, General Motors Corporation, Moraine, Ohio. April 2000.
- ENVIRON Corporation, 2000b. Supplemental Resource Conservation and Recovery Act Facility Investigation Report, Volume II Supplemental Baseline Risk Assessment, General Motors Powertrain Group Moraine Engine Plant and General Motors Truck Group Moraine Assembly Plant, Moraine, Ohio. April 2000.
- Geraghty & Miller, Inc. 1991. Description of Current Conditions Task 1 of the RCRA Facility Investigation for Harrison Radiator Division – GMC, Moraine, Ohio. January 1991.
- Geraghty & Miller, Inc. 1995. Final Interim Measures Design Plans, Harrison Division – GMC, Moraine, Ohio. April 1995.
- Geraghty & Miller, Inc. 1996. Monthly Technical Progress Report, October 1996, RCRA Facility Investigation, Delphi Harrison Thermal Systems, General Motors Corporation, Moraine, Ohio. November 1996.
- Geraghty & Miller, Inc., 1997a. Supplemental RFI Work Plan, General Motors Powertrain Group Moraine Engine Plant and General Motors Truck Group Moraine Assembly Plant, Moraine, Ohio. July 1997.
- Geraghty & Miller, Inc., 1997b. Supplemental DOCC for General Motors Powertrain Group Moraine Engine Plant and General Motors Truck Group Moraine Assembly Plant, Moraine, Ohio. July 1997.
- Personal Communication. 1996. Personal Communication between Mr. William Buller of the U.S. EPA and Mr. James Reid of Geraghty & Miller, Inc. November 1996.
- Walton, William C., 1985. Practical Aspects of Ground-Water Modeling – Second Edition, N.W.W.A., Dublin, Ohio.
- Welch, A. H., D. B. Westjohn, D. R. Helsel, and R. B. Wanty, 2000. Arsenic in Ground Water of the United States: Occurrence and Geochemistry. Ground Water v. 38 no. 4, p. 589-604.



Table 1. Site-Wide Groundwater Monitoring and Remedial System Monitoring Events in 2011, RACER Trust, Moraine, Ohio.

2011 Site-Wide Groundwater and Surface Water Elevations

Groundwater and surface water elevations were measured on September 27 through 28, 2011.

2011 Site-Wide Annual Groundwater Sampling

Site-specific list of VOCs⁽¹⁾ and field parameters⁽²⁾ were analyzed during 2011 from the following upper aquifer monitoring wells. Biogeochemical parameters⁽³⁾ were analyzed at select wells identified below (GM-32 sampled only for field parameters and total organic carbon):

W-2-N	W-2-S	GM-16	GM-35	GM-60 ⁽³⁾
W-3-N	W-3-S	GM-19S ⁽³⁾	GM-43	GM-65S
W-4-N	W-4-S	GM-21 ⁽³⁾	GM-47	GM-75S ⁽³⁾
HR-2	TW-2	GM-23 ⁽³⁾	GM-50	GM-78
HR-4	GM-2	GM-26	GM-52	GM-79
HR-9	GM-6	GM-28 ⁽³⁾	GM-55	GM-80
HR-17	GM-8 ⁽³⁾	GM-29 ⁽³⁾	GM-59 ⁽³⁾	
HR-7				

Site-specific list of VOCs⁽¹⁾ were analyzed during 2011 from the following list of lower aquifer monitoring wells:

HR-12	GM-11	GM-20D	GM-84	GM-9
HR-15	GM-15	GM-54	GM-75D	
DN-13	GM-19D	GM-68D	GM-83D	

DN-13 Monthly Groundwater Sampling

Appendix IX VOCs and cis-1,2-dichloroethene were analyzed by EPA Method 8260B during monthly sampling events from DN-13.

Air Stripper Tower Influent and Effluent Monthly Groundwater Sampling

Benzene, chloroethane, 1,1-dichloroethane, cis-1,2-dichloroethene, trans-1,2-dichloroethene, ethylbenzene, tetrachloroethene, toluene, 1,1,1-trichloroethane, trichloroethene, vinyl chloride, and xylenes were analyzed during the influent sampling events from the air stripper tower by EPA Method 8260B. The stripping tower effluent sample was analyzed for oil and grease and the following list of VOCs: benzene, chloroethane, 1,1-dichloroethane, cis-1,2-dichloroethene, trans-1,2-dichloroethene, ethylbenzene, tetrachloroethene, toluene, 1,1,1-trichloroethane, trichloroethene, vinyl chloride, and xylenes. The effluent sample was analyzed by EPA Methods 8260B and 624 (drinking water standard).

Table 1. Site-Wide Groundwater Monitoring and Remedial System Monitoring Events in 2011, RACER Trust, Moraine, Ohio.

Analytical Methods

The following table presents the analytical methods used to analyze each parameter sampled during site-wide annual groundwater monitoring, RZ performance monitoring, DN-13 monthly groundwater monitoring, and the air stripper tower influent and effluent monthly groundwater sampling.

<u>Parameter</u>	<u>Analytical Method</u>
Appendix IX VOCs + cis-1,2-dichloroethene	EPA Method 8260B
Site-specific list of VOCs	EPA Method 8260B/EPA Method 624
Manganese, total and dissolved	EPA Method 6010B
Iron, total and dissolved	EPA Method 6010B
Sulfate	SM 375.4
Sulfide	SM 376.1
Total Organic Carbon	SM 415.1
Chlorides	SM 325.2
Ethane, Ethene, Methane	Method AM18G

- 1 - Site-specific list of VOCs includes: benzene, 1,1-dichloroethane, 1,1-dichloroethene, cis-1,2-dichloroethene, trans-1,2-dichloroethene, ethylbenzene, tetrachloroethene, toluene, 1,1,1-trichloroethane, trichloroethene, vinyl chloride, and xylenes.
- 2 - Field parameters include: pH, specific conductivity, dissolved oxygen, oxidation reduction potential, and temperature.
- 3 - Biogeochemical parameters include: manganese (total and dissolved), iron (total and dissolved), sulfate, sulfide, total organic carbon, chlorides, ethane, ethene, and methane.



Table 2. Carbon Source Solution Introduction Volumes for 2011, RACER Trust, Moraine, Ohio.

Location	Injection Well	January		February		March		April	
		No Injections ⁽¹⁾		Injection Event #127 ⁽²⁾		Injection Event #128 ⁽³⁾		Injection Event #129 ⁽⁴⁾	
		Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)
Reactive Zone 1	RZ-1C	---	NA	800	44.40	800	33.33	800	15.40
	RZ-1D	---	NA	800	42.10	800	27.58	800	25.00
	RZ-1E	---	NA	800	42.10	800	26.66	800	27.60
	RZ-1F	---	NA	800	44.40	800	40.00	800	34.80
	RZ-1G	---	NA	800	44.40	800	34.78	800	28.60
	RZ-1H	---	NA	800	50.00	800	20.00	800	11.60
	RZ-1I	---	NA	800	50.00	800	40.00	800	33.30
	RZ-1J	---	NA	800	47.10	800	40.00	800	34.80
	RZ-1K	---	NA	800	47.10	800	36.36	800	36.40
	RZ-1L	---	NA	800	53.30	800	40.00	800	32.00
	RZ-1M	---	NA	800	57.10	800	28.57	800	29.60
	RZ-1N	---	NA	800	38.10	800	32.00	800	34.80
	RZ-1O	---	NA	800	17.80	800	32.00	800	26.70
	RZ-1P	---	NA	800	42.10	800	38.09	800	26.60
	RZ-1Q	---	NA	800	40.00	800	34.78	800	24.20
	RZ-1R	---	NA	800	44.44	800	36.36	800	29.60
	RZ-1S	---	NA	800	40.00	800	28.57	800	29.60
	RZ-1T	---	NA	800	44.44	800	40.00	800	21.60
	RZ-1U	---	NA	800	40.00	800	42.10	800	34.80



Table 2. Carbon Source Solution Introduction Volumes for 2011, RACER Trust, Moraine, Ohio.

Location	Injection Well	January		February		March		April	
		No Injections ⁽¹⁾		Injection Event #127 ⁽²⁾		Injection Event #128 ⁽³⁾		Injection Event #129 ⁽⁴⁾	
		Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)
Reactive Zone 3	RZ-3A	---	NA	1600	42.11	1600	32.47	1600	29.33
	RZ-3B	---	NA	1600	42.22	1600	36.44	1600	29.17
	RZ-3C	---	NA	1600	41.05	1600	41.05	1600	30.81
	RZ-3D	---	NA	1600	25.71	1600	23.03	1600	20.19
	RZ-3E	---	NA	1600	30.29	1600	27.62	1600	26.05
	RZ-3F	---	NA	1600	39.05	1600	32.67	1600	32.00
	RZ-3G	---	NA	1600	37.39	1600	41.05	1600	35.57
	RZ-3H	---	NA	1600	36.36	1600	34.06	1600	34.06
	RZ-3I	---	NA	1600	39.23	1600	36.67	1600	25.71
	RZ-3J	---	NA	1600	39.05	1600	41.05	1600	35.57
	RZ-3K	---	NA	1600	40.00	1600	34.18	1600	34.18
	RZ-3L	---	NA	1600	42.22	1600	37.39	1600	35.57
	RZ-3M	---	NA	1600	41.05	1600	42.22	1600	32.00
	RZ-3N	---	NA	1600	42.22	1600	41.05	1600	34.60
	RZ-3O	---	NA	1600	40.00	1600	38.18	1600	29.89
	RZ-3P	---	NA	1600	42.22	1600	41.05	1600	35.71
	RZ-3Q	---	NA	1600	43.27	1600	41.05	1600	39.05
	RZ-3R	---	NA	1600	40.00	1600	38.18	1600	36.44
	RZ-3S	---	NA	1600	41.05	1600	39.05	1600	31.18
	RZ-3T	---	NA	1600	41.05	1600	43.27	1600	29.10
	RZ-3U	---	NA	1600	40.00	1600	41.05	1600	36.44
	RZ-3V	---	NA	1600	41.05	1600	39.05	1600	35.57
	RZ-3W	---	NA	1600	42.22	1600	43.27	1600	40.00
	RZ-3X	---	NA	1600	35.57	1600	34.18	1600	30.76
	RZ-3Y	---	NA	1600	43.27	1600	41.05	1600	39.05
	RZ-3Z	---	NA	1600	40.00	1600	40.00	1600	35.57
	RZ-3AA	---	NA	1600	43.27	1600	43.27	1600	36.44
	RZ-3BB	---	NA	1600	39.05	1600	41.05	1600	39.05



Table 2. Carbon Source Solution Introduction Volumes for 2011, RACER Trust, Moraine, Ohio.

Location	Injection Well	January		February		March		April	
		No Injections ⁽¹⁾		Injection Event #127 ⁽²⁾		Injection Event #128 ⁽³⁾		Injection Event #129 ⁽⁴⁾	
		Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)
Reactive Zone 3	RZ-3CC	---	NA	1600	41.05	1600	41.05	1600	39.05
	RZ-3DD	---	NA	1600	43.27	1600	41.05	1600	36.00
	RZ-3GG	---	NA	1600	43.25	1600	38.18	1600	35.71
	RZ-3HH	---	NA	1600	49.80	1600	41.05	1600	37.39
	RZ-3II	---	NA	1600	43.55	1600	36.67	1600	37.39
	RZ-3JJ	---	NA	1600	18.20	1600	34.85	1600	26.23
	RZ-3KK	---	NA	1600	35.60	1600	41.05	1600	29.33
	RZ-3RR	---	NA	1600	34.85	1600	40.00	1600	32.77
	RZ-3SS	---	NA	1600	12.45	1600	19.30	1600	17.07
	RZ-3TT	---	NA	1600	11.60	1600	18.09	1600	16.06
	RZ-3UU	---	NA	1600	40.95	1600	30.76	1600	24.44
	RZ-3VV	---	NA	1600	27.30	1600	24.26	1600	19.30
Reactive Zone 4	RZ-4A	---	NA	3000	39.52	3000	31.76	3000	31.25
	RZ-4B	---	NA	3000	41.11	3000	31.99	3000	29.70
	RZ-4C	---	NA	3000	37.96	3000	37.31	3000	26.83
	RZ-4D	---	NA	3000	37.70	3000	39.09	3000	31.98
	RZ-4E	---	NA	3000	42.75	3000	29.45	3000	26.03
	RZ-4F	---	NA	3000	35.50	3000	29.93	3000	23.37
	RZ-4G	---	NA	3000	39.90	3000	32.13	3000	30.00
	RZ-4H	---	NA	3000	42.16	3000	26.11	3000	38.47
Site-Wide Total		NA	NA	103,200	NA	103,200	NA	103,200	NA



Table 2. Carbon Source Solution Introduction Volumes for 2011, RACER Trust, Moraine, Ohio.

Location	Injection Well	May		June		July		August	
		Injection Event #130 ⁽⁵⁾		Injection Event #131 ⁽⁶⁾		Injection Event #132 ⁽⁷⁾		Injection Event #133 ⁽⁸⁾	
		Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)
Reactive Zone 1	RZ-1C	800	25.00	800	29.60	800	26.70	800	32.00
	RZ-1D	800	27.60	800	27.60	800	27.60	800	29.60
	RZ-1E	800	26.70	800	29.60	800	28.60	800	29.60
	RZ-1F	800	28.60	800	34.80	800	32.00	800	34.80
	RZ-1G	800	28.60	800	30.80	800	30.80	800	30.80
	RZ-1H	800	19.00	800	23.50	800	24.20	800	21.60
	RZ-1I	800	28.60	800	33.30	800	36.40	800	33.30
	RZ-1J	800	29.60	800	33.30	800	27.60	800	34.80
	RZ-1K	800	33.30	800	33.30	800	33.30	800	36.40
	RZ-1L	800	32.00	800	33.30	800	30.80	800	33.30
	RZ-1M	800	25.80	800	25.80	800	29.60	800	29.60
	RZ-1N	800	32.00	800	30.80	800	32.00	800	25.80
	RZ-1O	800	22.90	800	29.62	800	28.57	800	26.70
	RZ-1P	800	22.90	800	38.09	800	30.76	800	33.30
	RZ-1Q	800	30.80	800	32.00	800	29.62	800	25.00
	RZ-1R	800	34.80	800	36.36	800	36.36	800	30.80
	RZ-1S	800	28.60	800	33.33	800	29.62	800	33.30
	RZ-1T	800	17.40	800	34.78	800	34.78	800	24.20
	RZ-1U	800	36.40	800	34.78	800	36.36	800	34.80



Table 2. Carbon Source Solution Introduction Volumes for 2011, RACER Trust, Moraine, Ohio.

Location	Injection Well	May		June		July		August	
		Injection Event #130 ⁽⁵⁾		Injection Event #131 ⁽⁶⁾		Injection Event #132 ⁽⁷⁾		Injection Event #133 ⁽⁸⁾	
		Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)
Reactive Zone 3	RZ-3A	1600	30.95	1600	33.39	1600	30.29	1600	31.62
	RZ-3B	1600	34.85	1600	36.36	1600	34.78	1600	34.78
	RZ-3C	1600	26.66	1600	34.06	1600	35.57	1600	29.17
	RZ-3D	1600	23.61	1600	26.29	1600	27.12	1600	25.22
	RZ-3E	1600	28.71	1600	25.45	1600	27.71	1600	27.62
	RZ-3F	1600	24.33	1600	30.19	1600	30.19	1600	29.10
	RZ-3G	1600	31.48	1600	29.10	1600	32.77	1600	32.67
	RZ-3H	1600	34.78	1600	32.20	1600	33.39	1600	32.00
	RZ-3I	1600	25.40	1600	26.66	1600	31.38	1600	27.31
	RZ-3J	1600	37.23	1600	33.33	1600	36.36	1600	32.05
	RZ-3K	1600	33.86	1600	31.38	1600	32.20	1600	28.14
	RZ-3L	1600	28.14	1600	34.06	1600	35.57	1600	30.95
	RZ-3M	1600	40.00	1600	38.18	1600	35.57	1600	34.06
	RZ-3N	1600	39.05	1600	39.05	1600	37.23	1600	32.67
	RZ-3O	1600	27.62	1600	36.44	1600	35.05	1600	34.85
	RZ-3P	1600	35.57	1600	34.18	1600	34.06	1600	33.39
	RZ-3Q	1600	32.20	1600	37.23	1600	38.09	1600	34.85
	RZ-3R	1600	34.85	1600	40.00	1600	38.18	1600	35.57
	RZ-3S	1600	34.06	1600	33.39	1600	33.56	1600	31.48
	RZ-3T	1600	32.05	1600	33.39	1600	32.00	1600	28.14
	RZ-3U	1600	31.68	1600	38.09	1600	36.36	1600	35.57
	RZ-3V	1600	34.06	1600	36.36	1600	32.67	1600	33.33
	RZ-3W	1600	29.79	1600	37.23	1600	36.44	1600	32.77
	RZ-3X	1600	32.77	1600	31.38	1600	33.33	1600	30.81
	RZ-3Y	1600	36.44	1600	36.67	1600	34.78	1600	31.38
	RZ-3Z	1600	34.18	1600	36.36	1600	36.36	1600	29.10
	RZ-3AA	1600	30.81	1600	35.57	1600	35.57	1600	29.10
	RZ-3BB	1600	34.06	1600	34.85	1600	35.05	1600	30.81



Table 2. Carbon Source Solution Introduction Volumes for 2011, RACER Trust, Moraine, Ohio.

Location	Injection Well	May		June		July		August	
		Injection Event #130 ⁽⁵⁾		Injection Event #131 ⁽⁶⁾		Injection Event #132 ⁽⁷⁾		Injection Event #133 ⁽⁸⁾	
		Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)
Reactive Zone 3	RZ-3CC	1600	35.05	1600	37.23	1600	36.44	1600	32.00
	RZ-3DD	1600	37.23	1600	36.44	1600	35.57	1600	33.33
	RZ-3GG	1600	26.80	1600	30.80	1600	33.60	1600	34.20
	RZ-3HH	1600	29.70	1600	33.40	1600	33.60	1600	28.60
	RZ-3II	1600	22.65	1600	38.20	1600	35.05	1600	37.25
	RZ-3JJ	1600	5.35	1600	23.20	1600	13.95	1600	17.70
	RZ-3KK	1600	30.20	1600	34.05	1600	32.05	1600	37.25
	RZ-3RR	1600	26.05	1600	32.05	1600	28.60	1600	30.80
	RZ-3SS	1600	16.35	1600	18.40	1600	17.55	1600	23.90
	RZ-3TT	1600	16.85	1600	21.20	1600	20.25	1600	20.95
	RZ-3UU	1600	23.60	1600	27.60	1600	26.25	1600	27.15
	RZ-3VV	1600	19.65	1600	23.85	1600	22.30	1600	24.25
Reactive Zone 4	RZ-4A	3000	25.83	3000	34.33	3000	31.81	3000	30.63
	RZ-4B	3000	29.74	3000	31.17	3000	31.00	3000	29.74
	RZ-4C	3000	28.14	3000	27.55	3000	28.71	3000	25.37
	RZ-4D	3000	30.22	3000	29.98	3000	29.78	3000	29.12
	RZ-4E	3000	30.06	3000	32.40	3000	31.29	3000	28.21
	RZ-4F	3000	27.08	3000	30.73	3000	28.68	3000	25.33
	RZ-4G	3000	29.26	3000	34.81	3000	35.86	3000	30.23
	RZ-4H	3000	28.20	3000	35.77	3000	37.31	3000	28.77
Site-Wide Total		103,200	NA	103,200	NA	103,200	NA	103,200	NA



Table 2. Carbon Source Solution Introduction Volumes for 2011, RACER Trust, Moraine, Ohio.

Location	Injection Well	September		October		November		December	
		Injection Event #134 ⁽⁹⁾		Injection Event #135 ⁽¹⁰⁾		Injection Event #136 ⁽¹¹⁾		Injection Event #137 ⁽¹²⁾	
		Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)
Reactive Zone 1	RZ-1C	800	27.60	800	28.60	800	29.60	800	25.00
	RZ-1D	800	29.60	800	28.60	800	30.80	800	28.60
	RZ-1E	800	26.70	800	26.70	800	28.60	800	25.80
	RZ-1F	800	26.70	800	22.20	800	25.80	800	27.60
	RZ-1G	800	30.80	800	25.80	800	29.60	800	26.70
	RZ-1H	800	24.20	800	22.90	800	21.60	800	19.50
	RZ-1I	800	27.60	800	30.80	800	26.70	800	27.60
	RZ-1J	800	21.60	800	30.80	800	29.60	800	22.90
	RZ-1K	800	24.20	800	30.80	800	34.80	800	29.60
	RZ-1L	800	28.60	800	22.20	800	33.30	800	27.60
	RZ-1M	800	27.60	800	26.70	800	30.80	800	25.00
	RZ-1N	800	24.20	800	24.20	800	16.00	800	25.80
	RZ-1O	800	26.70	800	27.60	800	29.60	800	23.50
	RZ-1P	800	29.60	800	26.70	800	28.60	800	25.00
	RZ-1Q	800	15.10	800	16.00	800	9.40	800	11.00
	RZ-1R	800	33.30	800	34.80	800	26.70	800	30.80
	RZ-1S	800	29.60	800	29.60	800	30.80	800	21.10
	RZ-1T	800	32.00	800	33.30	800	33.30	800	26.70
	RZ-1U	800	26.70	800	27.60	800	32.00	800	28.60



Table 2. Carbon Source Solution Introduction Volumes for 2011, RACER Trust, Moraine, Ohio.

Location	Injection Well	September		October		November		December	
		Injection Event #134 ⁽⁹⁾		Injection Event #135 ⁽¹⁰⁾		Injection Event #136 ⁽¹¹⁾		Injection Event #137 ⁽¹²⁾	
		Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)
Reactive Zone 3	RZ-3A	1600	30.29	1600	30.00	1600	32.70	1600	27.40
	RZ-3B	1600	26.66	1600	32.80	1600	23.90	1600	22.50
	RZ-3C	1600	31.48	1600	34.20	1600	25.00	1600	27.60
	RZ-3D	1600	28.08	1600	24.20	1600	25.50	1600	25.20
	RZ-3E	1600	30.81	1600	24.30	1600	26.20	1600	26.00
	RZ-3F	1600	30.29	1600	24.40	1600	23.70	1600	23.50
	RZ-3G	1600	25.83	1600	29.70	1600	24.80	1600	25.50
	RZ-3H	1600	33.33	1600	31.20	1600	27.10	1600	26.20
	RZ-3I	1600	30.76	1600	28.60	1600	24.30	1600	24.30
	RZ-3J	1600	26.66	1600	28.20	1600	24.60	1600	24.10
	RZ-3K	1600	27.76	1600	28.20	1600	27.10	1600	24.30
	RZ-3L	1600	33.39	1600	31.70	1600	29.70	1600	21.40
	RZ-3M	1600	34.06	1600	26.40	1600	29.10	1600	30.80
	RZ-3N	1600	34.06	1600	34.10	1600	29.60	1600	30.80
	RZ-3O	1600	34.78	1600	31.40	1600	47.50	1600	30.80
	RZ-3P	1600	32.67	1600	30.30	1600	30.30	1600	29.30
	RZ-3Q	1600	32.77	1600	31.70	1600	29.10	1600	27.60
	RZ-3R	1600	38.18	1600	33.40	1600	31.40	1600	34.10
	RZ-3S	1600	34.85	1600	29.70	1600	29.10	1600	29.10
	RZ-3T	1600	28.14	1600	29.10	1600	28.20	1600	26.70
	RZ-3U	1600	31.38	1600	29.20	1600	29.20	1600	30.30
	RZ-3V	1600	30.95	1600	30.80	1600	29.70	1600	29.10
	RZ-3W	1600	32.05	1600	31.50	1600	30.80	1600	28.50
	RZ-3X	1600	28.57	1600	30.80	1600	27.30	1600	30.20
	RZ-3Y	1600	28.14	1600	32.10	1600	31.40	1600	30.80
	RZ-3Z	1600	28.08	1600	30.00	1600	32.10	1600	28.20
	RZ-3AA	1600	32.05	1600	30.80	1600	27.20	1600	27.90
	RZ-3BB	1600	30.29	1600	32.20	1600	29.80	1600	29.60



Table 2. Carbon Source Solution Introduction Volumes for 2011, RACER Trust, Moraine, Ohio.

Location	Injection Well	September		October		November		December	
		Injection Event #134 ⁽⁹⁾		Injection Event #135 ⁽¹⁰⁾		Injection Event #136 ⁽¹¹⁾		Injection Event #137 ⁽¹²⁾	
		Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)	Volume (gal)	Flow Rate (gpm)
Reactive Zone 3	RZ-3CC	1600	32.00	1600	32.10	1600	32.70	1600	30.80
	RZ-3DD	1600	32.00	1600	34.10	1600	31.40	1600	29.40
	RZ-3GG	1600	28.30	1600	28.30	1600	30.20	1600	30.30
	RZ-3HH	1600	30.20	1600	28.60	1600	30.20	1600	29.20
	RZ-3II	1600	30.80	1600	27.80	1600	31.40	1600	30.20
	RZ-3JJ	1600	10.85	1600	12.90	1600	10.40	1600	8.40
	RZ-3KK	1600	31.45	1600	28.10	1600	29.10	1600	28.10
	RZ-3RR	1600	29.60	1600	28.60	1600	27.20	1600	25.10
	RZ-3SS	1600	20.20	1600	19.50	1600	19.30	1600	15.50
	RZ-3TT	1600	18.35	1600	17.30	1600	18.90	1600	15.20
	RZ-3UU	1600	22.75	1600	21.10	1600	20.20	1600	20.60
	RZ-3VV	1600	20.25	1600	20.90	1600	20.60	1600	17.70
Reactive Zone 4	RZ-4A	3000	27.08	3000	30.30	3000	27.10	3000	25.40
	RZ-4B	3000	25.44	3000	30.50	3000	27.30	3000	24.40
	RZ-4C	3000	25.81	3000	27.70	3000	24.80	3000	24.30
	RZ-4D	3000	26.18	3000	31.10	3000	23.30	3000	25.60
	RZ-4E	3000	28.37	3000	30.30	3000	29.40	3000	26.40
	RZ-4F	3000	25.78	3000	27.10	3000	26.80	3000	25.90
	RZ-4G	3000	31.83	3000	30.10	3000	28.90	3000	28.50
	RZ-4H	3000	30.90	3000	28.80	3000	29.70	3000	27.50
Site-Wide Total		103,200	NA	103,200	NA	103,200	NA	103,200	NA



Table 2. Carbon Source Solution Introduction Volumes for 2011, RACER Trust, Moraine, Ohio.

Notes:

Carbon source introduced into each well is a 50:1 solution (potable water to molasses).

gpm - gallons per minute.

gal - gallons.

NA - Not Applicable.

--- Introduction well was not selected for introduction during this event.

(1) No injection event scheduled.

(2) Injection Event #127 was completed February 1st, February 7th through the 10th, February 14th through the 18th, and February 21st through the 24th, 2011.

(3) Injection Event #128 was completed March 1st through the 4th, March 7th through the 11th, March 15th through the 18th, March 22nd through the 23rd, and March 31st, 2011.

(4) Injection Event #129 was completed April 4th through the 8th, April 11th through the 14th, April 18th through the 22nd, and April 27th through the 28th, 2011.

(5) Injection Event #130 was completed May 2nd through the 6th, May 9th through the 13th, May 16th through the 19th, and May 23rd through the 24th, 2011.

(6) Injection Event #131 was completed June 1st through the 3rd, June 6th through the 10th, June 13th through the 16th, and June 20th through the 22nd, 2011.

(7) Injection Event #132 was completed July 5th through the 8th, July 12th through the 15th, July 18th through the 20th, and July 25th, and the 26th, 2011.

(8) Injection Event #133 was completed August 1st through the 5th, August 8th through the 12th, August 17th, and August 22nd through the 26th, 2011.

(9) Injection Event #134 was completed September 6th through the 9th, 12th through the 16th, 19th through the 22nd, and the 26th through the 29th, 2011.

(10) Injection Event #135 was completed October 4th through the 7th, October 11th through 13th, October 25th through the 27th, October 31st, and November 2nd through the 4th, 2011.

(11) Injection Event #136 was completed November 4th, November 7th through the 11th, November 14th through the 18th, November 21st through the 23rd, November 28th through the 30th, and December 1st, 2011.

(12) Injection Event #137 was completed December 5th through the 9th, December 14th through the 16th, December 19th through the 22nd, and December 27th through the 30th, 2011.



Table 3. Summary of Groundwater VOC Analytical Results from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

		Upgradient Contributions	Source Areas			
		HR-9 9/28/2011	GM-23 9/30/2011	GM-59 9/30/2011	GM-60 9/30/2011	GM-75S 9/30/2011
	Units	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer
<u>Volatile Organic Compounds</u>						
1,1,1-Trichloroethane	µg/L	4.0	< 20 U	< 13 U	< 20 U	< 17 U
1,1-Dichloroethane	µg/L	66	< 20 U	< 13 U	< 20 U	< 17 U
1,1-Dichloroethene	µg/L	< 3.3 U	< 20 U	< 13 U	< 20 U	< 17 U
Benzene	µg/L	< 3.3 U	< 20 U	< 13 U	< 20 U	< 17 U
cis-1,2-Dichloroethene	µg/L	37	580	6.4 J	370	4.4 J
Ethylbenzene	µg/L	< 3.3 U	< 20 U	< 13 U	< 20 U	< 17 U
Tetrachloroethene	µg/L	< 3.3 U	57	520	620	430
Toluene	µg/L	< 3.3 U	< 20 U	< 13 U	< 20 U	< 17 U
trans-1,2-Dichloroethene	µg/L	5.2	21	< 13 U	3.8 J	< 17 U
Trichloroethene	µg/L	9.1	33	510	810	720
Vinyl chloride	µg/L	< 3.3 U	840	< 13 U	11 J	< 17 U
Xylene (total)	µg/L	< 6.7 U	< 40 U	< 25 U	< 40 U	< 33 U
Total VOCs	µg/L	121.3	1531	1036.4	1814.8	1154.4

µg/L - Micrograms per Liter.

All QA/QC results for 2011 data are shown in Appendix C.

< - Constituent not detected above laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above laboratory reporting limit shown.



Table 3. Summary of Groundwater VOC Analytical Results from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

	Units	Downgradient Reactive Zone Performance Wells					
		GM-29	GM-28	GM-21	GM-6	GM-8	GM-19S
		9/30/2011	10/5/2011	9/29/2011	9/29/2011	9/29/2011	9/29/2011
		Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer
Volatile Organic Compounds							
1,1,1-Trichloroethane	µg/L	11 J	< 1.0 U	1.0	< 1.0 U	< 1.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	8.5 J	2.1	16	4.5	1.9	10
1,1-Dichloroethene	µg/L	< 13 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Benzene	µg/L	< 13 U	< 1.0 U	< 1.0 U	1.0	3.5	< 1.0 U
cis-1,2-Dichloroethene	µg/L	470	0.72 J	9.9	3.7	< 1.0 U	5.3
Ethylbenzene	µg/L	< 13 U	< 1.0 U	< 1.0 U	< 1.0 U	5.4	< 1.0 U
Tetrachloroethene	µg/L	13	0.63 J	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Toluene	µg/L	< 13 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	17	0.69 J	1.9	0.84 J	0.20 J	1.1
Trichloroethene	µg/L	320	0.41 J	19	< 1.0 U	< 1.0 U	< 1.0 U
Vinyl chloride	µg/L	52	0.57 J	6.2	1.5	0.24 J	12
Xylene (total)	µg/L	< 25 U	< 2.0 U	< 2.0 U	< 2.0 U	0.99 J	< 2.0 U
Total VOCs	µg/L	891.5	5.12	54	11.5	12.2	28.4

µg/L - Micrograms per Liter.

All QA/QC results for 2011 data are shown in Appendix C.

< - Constituent not detected above laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above laboratory reporting limit shown.



Table 3. Summary of Groundwater VOC Analytical Results from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

	Units	Closed North Settling Lagoon Monitoring Results				Closed South Settling Lagoon Monitoring Results			
		HR-4	W-2-N	W-3-N	W-4-N	HR-17	W-2-S	W-3-S	W-4-S
		9/28/2011	9/28/2011	9/28/2011	9/28/2011	9/29/2011	9/29/2011	9/29/2011	9/29/2011
		Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer
Volatile Organic Compounds									
1,1,1-Trichloroethane	µg/L	< 1.0 U	< 1.0 U	< 2.5 U	< 1.0 U	< 5.7 U	1.6	0.51 J	1.1
1,1-Dichloroethane	µg/L	4.5	< 1.0 U	< 2.5 U	2.4	< 5.7 U	1.2	0.38 J	1.5
1,1-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 2.5 U	< 1.0 U	< 5.7 U	< 1.0 U	< 1.0 U	< 1.0 U
Benzene	µg/L	< 1.0 U	< 1.0 U	< 2.5 U	< 1.0 U	< 5.7 U	< 1.0 U	< 1.0 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	< 1.0 U	1.4	53	9.7	< 5.7 U	< 1.0 U	0.72 J	8.9
Ethylbenzene	µg/L	< 1.0 U	< 1.0 U	< 2.5 U	< 1.0 U	< 5.7 U	< 1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	< 1.0 U	< 1.0 U	0.94 J	1.1	110	0.44 J	2.8	31
Toluene	µg/L	< 1.0 U	< 1.0 U	< 2.5 U	< 1.0 U	< 5.7 U	< 1.0 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	0.80 J	0.59 J	< 5.7 U	< 1.0 U	0.19 J	1.4
Trichloroethene	µg/L	0.27 J	< 1.0 U	< 2.5 U	9.9	57	7.1	2.6	21
Vinyl chloride	µg/L	< 1.0 U	< 1.0 U	2.7	< 1.0 U	< 5.7 U	< 1.0 U	< 1.0 U	< 1.0 U
Xylene (total)	µg/L	< 2.0 U	< 2.0 U	< 5.0 U	< 2.0 U	< 11 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	4.77	1.4	57.4	23.7	167	10.3	7.2	64.9

µg/L - Micrograms per Liter.

All QA/QC results for 2011 data are shown in Appendix C.

< - Constituent not detected above laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above laboratory reporting limit shown.



Table 3. Summary of Groundwater VOC Analytical Results from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

	Units	Downgradient On-Site			
		GM-43 9/30/2011 Upper Aquifer	GM-35 9/30/2011 Upper Aquifer	HR-2 9/28/2011 Upper Aquifer	HR-7 9/28/2011 Upper Aquifer
Volatile Organic Compounds					
1,1,1-Trichloroethane	µg/L	< 4.0 U	2.6 J	< 1.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	4.2	20	6.4	< 1.0 U
1,1-Dichloroethene	µg/L	1.0 J	0.64 J	< 1.0 U	< 1.0 U
Benzene	µg/L	< 4.0 U	< 3.3 U	< 1.0 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	130	66	2.1	1.7
Ethylbenzene	µg/L	< 4.0 U	< 3.3 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	22	17	< 1.0 U	< 1.0 U
Toluene	µg/L	< 4.0 U	< 3.3 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	5.3	11	0.32 J	< 1.0 U
Trichloroethene	µg/L	180	59	0.43 J	7.3
Vinyl chloride	µg/L	1.0 J	7.7	< 1.0 U	< 1.0 U
Xylene (total)	µg/L	< 8.0 U	< 6.7 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	343.5	183.9	9.25	9.0

µg/L - Micrograms per Liter.

All QA/QC results for 2011 data are shown in Appendix C.

< - Constituent not detected above laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above laboratory reporting limit shown.



Table 3. Summary of Groundwater VOC Analytical Results from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

	Units	Property Boundary			Off-Site Downgradient of the Site	
		GM-2	TW-2	GM-16	GM-47	GM-50
		9/29/2011	9/28/2011	9/29/2011	9/29/2011	9/30/2011
		Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer
Volatile Organic Compounds						
1,1,1-Trichloroethane	µg/L	< 1.0 U	< 1.0 U	< 3.3 U	< 2.5 U	1.7 J
1,1-Dichloroethane	µg/L	0.92 J	1.8	5.5	2.9	2.3
1,1-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 3.3 U	< 2.5 U	< 2.0 U
Benzene	µg/L	< 1.0 U	1.2	< 3.3 U	< 2.5 U	< 2.0 U
cis-1,2-Dichloroethene	µg/L	9.0	5.7	23	34	7.1
Ethylbenzene	µg/L	< 1.0 U	0.45 J	< 3.3 U	< 2.5 U	< 2.0 U
Tetrachloroethene	µg/L	< 1.0 U	1.2	64	52	95
Toluene	µg/L	< 1.0 U	< 1.0 U	< 3.3 U	< 2.5 U	< 2.0 U
trans-1,2-Dichloroethene	µg/L	< 1.0 U	0.25 J	0.77 J	2.3 J	0.62 J
Trichloroethene	µg/L	0.75 J	5.9	45	18	86
Vinyl chloride	µg/L	0.69 J	1.1	1.2 J	< 2.5 U	< 2.0 U
Xylene (total)	µg/L	< 2.0 U	< 2.0 U	< 6.7 U	< 5.0 U	< 4.0 U
Total VOCs	µg/L	11.4	17.6	139.5	109.2	192.7

µg/L - Micrograms per Liter.

All QA/QC results for 2011 data are shown in Appendix C.

< - Constituent not detected above laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above laboratory reporting limit shown.



Table 3. Summary of Groundwater VOC Analytical Results from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

	Units	Off-Site Downgradient of the Site						
		GM-52	GM-55	GM-65S	GM-78	GM-79	GM-80	GM-26
		9/29/2011	9/28/2011	9/28/2011	9/29/2011	9/28/2011	9/28/2011	9/28/2011
		Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer
Volatile Organic Compounds								
1,1,1-Trichloroethane	µg/L	< 4.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	1.9 J	< 1.0 U	0.16 J	< 1.0 U	0.22 J	0.47 J	< 1.0 U
1,1-Dichloroethene	µg/L	< 4.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Benzene	µg/L	< 4.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	4.2	< 1.0 U	< 1.0 U	< 1.0 U	0.19 J	2.7	< 1.0 U
Ethylbenzene	µg/L	< 4.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	73	6.1	7.8	4.3	0.34 J	4.1	1.6
Toluene	µg/L	< 4.0 U	< 1.0 U	< 1.0 U	0.18 J	< 1.0 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	< 4.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.24 J	< 1.0 U
Trichloroethene	µg/L	38	< 1.0 U	2.3	< 1.0 U	1.3	5.9	< 1.0 U
Vinyl chloride	µg/L	< 4.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Xylene (total)	µg/L	< 8.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	117.1	6.1	10.3	4.5	2.1	13.4	1.6

µg/L - Micrograms per Liter.

All QA/QC results for 2011 data are shown in Appendix C.

< - Constituent not detected above laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above laboratory reporting limit shown.



Table 3. Summary of Groundwater VOC Analytical Results from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

		Upgradient Contributions	On-Site Groundwater Quality		
		HR-12 9/28/2011	GM-54 9/29/2011	GM-68D 9/30/2011	GM-75D 9/30/2011
	Units	Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer
<u>Volatile Organic Compounds</u>					
1,1,1-Trichloroethane	µg/L	< 1.0 U	< 4.0 U	< 1.7 U	< 4.0 U
1,1-Dichloroethane	µg/L	2.8	< 4.0 U	< 1.7 U	< 4.0 U
1,1-Dichloroethene	µg/L	< 1.0 U	< 4.0 U	< 1.7 U	< 4.0 U
Benzene	µg/L	< 1.0 U	< 4.0 U	< 1.7 U	< 4.0 U
cis-1,2-Dichloroethene	µg/L	1.6	< 4.0 U	1.5 J	12
Ethylbenzene	µg/L	< 1.0 U	< 4.0 U	< 1.7 U	< 4.0 U
Tetrachloroethene	µg/L	< 1.0 U	83	62	200
Toluene	µg/L	< 1.0 U	< 4.0 U	< 1.7 U	< 4.0 U
trans-1,2-Dichloroethene	µg/L	0.24 J	< 4.0 U	< 1.7 U	< 4.0 U
Trichloroethene	µg/L	< 1.0 U	2.6 J	13	180
Vinyl chloride	µg/L	< 1.0 U	< 4.0 U	< 1.7 U	2.1 J
Xylene (total)	µg/L	< 2.0 U	< 8.0 U	< 3.3 U	< 8.0 U
Total VOCs	µg/L	4.6	85.6	76.5	394.1

µg/L - Micrograms per Liter.

All QA/QC results for 2011 data are shown in Appendix C.

< - Constituent not detected above laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above laboratory reporting limit shown.



Table 3. Summary of Groundwater VOC Analytical Results from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

	Units	Lower Aquifer Groundwater Quality					Downgradient Groundwater Quality			
		HR-15	GM-19D	GM-11	GM-15	GM-20D	GM-9	DN-13	GM-83D	GM-84
		9/28/2011	9/29/2011	9/28/2011	9/29/2011	9/28/2011	9/28/2011	9/28/2011	9/28/2011	9/29/2011
		Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer
Volatile Organic Compounds										
1,1,1-Trichloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.4 U	1.1	< 1.0 U	0.50 J	1.5	< 1.0 U	< 1.0 U
1,1-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Benzene	µg/L	< 1.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	3.5	1.7	< 1.4 U	1.1	< 1.0 U	1.0	6.3	< 1.0 U	< 1.0 U
Ethylbenzene	µg/L	< 1.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	< 1.0 U	< 1.0 U	1.1 J	< 1.0 U	2.2	< 1.0 U	0.40 J	< 1.0 U	< 1.0 U
Toluene	µg/L	< 1.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	0.38 J	< 1.0 U	< 1.0 U
Trichloroethene	µg/L	0.78 J	1.8	24	4.7	5.0	13	4.8	< 1.0 U	5.7
Vinyl chloride	µg/L	2.4	8.6	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	1.3	1.8	< 1.0 U
Xylene (total)	µg/L	< 2.0 U	< 2.0 U	< 2.9 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	6.7	12.1	25.1	6.9	7.2	14.5	14.7	1.8	5.7

µg/L - Micrograms per Liter.

All QA/QC results for 2011 data are shown in Appendix C.

< - Constituent not detected above laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above laboratory reporting limit shown.



Table 4. Influent Monitoring of the Air Stripper Tower for 2011, RACER Trust, Moraine, Ohio.

Constituent	Units	1/25/2011	2/1/2011	3/1/2011	4/1/2011	5/20/2011 ³	6/1/2011	7/5/2011	8/1/2011	9/12/2011	10/4/2011	11/2/2011	12/15/2011
Oil & Grease ¹	mg/L	1.5 J	< 5.0 U	< 5.0 U	2.4 JB	2.2 J	< 5.0 U	< 4.8 U	< 5.0 U	1.5 JB	0.76 JB	1.4 J	< 4.8 U
VOCs²													
Benzene	µg/L	1.5	1.1	0.55 J	0.74 J	1.14	1.2	1.3	1.1	1.4	1.1	1.2	1.1
Chloroethane	µg/L	4.2	5.4	2.4	2.9	7.01	5.0	7.5	6.7	7.5	6.4	5.3	4.1
1,1-Dichloroethane	µg/L	1.8	4.6	4.2	3.5	1.85	1.8	2.1	1.9	1.5	1.8	2.1	2.8
cis-1,2-Dichloroethene	µg/L	2.3	3.0	9.3	11	8.66	13	11	6.4	5.0	6.8	5.9	25
trans-1,2-Dichloroethene	µg/L	0.20 J	0.53 J	0.50 J	0.40 J	< 1.00 U	0.36 J	0.37 J	0.32 J	0.21 J	0.38 J	0.33 J	0.57 J
Ethylbenzene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	0.26 J	< 1.00 U	< 1.0 U	0.95 J	0.86 J	0.56 J	0.46 J	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	0.51 J	0.61 J	0.82 J	1.2	0.930	1.6	1.2	1.2	1.0	1.2	1.3	1.1
Toluene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.00 U	< 1.0 U	0.15 J	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1,1-Trichloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.00 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Trichloroethene	µg/L	1.0	1.9	3.3	11	9.69	12	13	8.4	5.9	5.9	6.8	9.6
Vinyl chloride	µg/L	1.6	1.4	2.2	6.0	2.04	1.9	3.6	2.7	1.7	1.3	1.2	3.3
Xylenes	µg/L	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.00 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	13.1	18.5	23.3	37.0	31.3	36.9	41.2	29.6	24.8	25.3	24.1	47.6

mg/L - Milligrams per Liter.

µg/L - Micrograms per Liter.

1 - Analytical method for oil & grease is EPA 1664A.

2 - Analytical method for volatile organic compounds (VOC) analysis is SW-846 Method 8260B.

3 - VOCs resampled May 20, 2011 due to laboratory error. Other parameters were from the May 2, 2011 sampling.

NA - Not analyzed.

J - Estimated result less than reporting limit.

B - Constituent detected in method blank.

< - Constituent not detected above laboratory reporting limit shown.

U - Constituent not detected above laboratory reporting limit shown.



Table 5. NPDES Permit Effluent Monitoring of the Air Stripper Tower for 2011, RACER Trust, Moraine, Ohio.

Constituent	Units	Permit Limit	1/25/2011	2/1/2011	3/1/2011	4/1/2011	5/20/2011 ⁴	6/1/2011	7/5/2011	8/1/2011	9/12/2011	10/4/2011	11/2/2011	12/15/2011
pH ¹	S.U.	6.5 - 9	7.71	7.58	7.63	7.75	7.87	7.77	7.61	7.51	7.88	NM	7.26	8.02
Oil & Grease ²	mg/L	10	1.0 J	< 5.0 U	< 5.0 U	2.0 JB	1.4 J	0.96 J	< 4.8 U	< 4.9 U	1.6 JB	1.1 JB	0.76 J	< 4.8 U
VOCs³														
Benzene	µg/L	10	0.32 J	0.22 J	< 1.0 U	< 1.0 U	< 1.00 U	< 1.0 U	0.14 J	< 1.0 U	0.21 J	0.15 J	0.26 J	< 1.0 U
Chloroethane	µg/L	10	0.62 J	0.49 J	< 1.0 U	< 1.0 U	0.480	< 1.0 U	0.66 J	0.42 J	0.61 J	< 1.0 U	0.82 J	0.61 J
1,1-Dichloroethane	µg/L	10	0.36 J	0.57 J	0.75 J	0.26 J	< 1.00 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.18 J	0.37 J	0.50 J
cis-1,2-Dichloroethene	µg/L	10	0.58 J	0.53 J	2.2	1.0	1.14	1.7	1.5	0.69 J	0.79 J	0.74 J	1.4	5.2
trans-1,2-Dichloroethene	µg/L	10	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.00 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Ethylbenzene	µg/L	10	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.00 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	10	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.00 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Toluene	µg/L	10	< 1.0 U	< 1.0 U	< 1.0 U	0.26 J	< 1.00 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1,1-Trichloroethane	µg/L	10	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.00 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Trichloroethene	µg/L	10	< 1.0 U	< 1.0 U	0.37 J	0.66 J	0.940	1.2	1.1	0.59 J	0.59 J	0.41 J	1.2	1.4
Vinyl Chloride	µg/L	10	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.00 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Xylenes	µg/L	10	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.00 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U

S.U. - Standard Units.

mg/L - Milligrams per Liter.

µg/L - Micrograms per Liter.

NM - Not measured.

1 - Analytical method for pH is EPA 150.1.

2 - Analytical method for oil & grease is EPA 1664A.

3 - Analytical method for volatile organic compounds (VOCs) is SW-846 Method 8260B.

4 - VOCs resampled May 20, 2011 due to laboratory error. Other parameters were from the May 2, 2011 sampling.

J - Estimated result less than reporting limit.

B - Constituent detected in method blank.

< - Constituent not detected above laboratory reporting limit shown.

U - Constituent not detected above laboratory reporting limit shown.



Table 6. DN-13 Monthly Monitoring for 2011, RACER Trust, Moraine, Ohio.

Volatile Organic Compound¹	Units	1/6/2011	2/1/2011	3/1/2011	4/1/2011	5/2/2011	6/1/2011	7/5/2011	8/1/2011	9/12/2011	10/4/2011	11/2/2011	12/15/2011
1,1,1,2-Tetrachloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1,1-Trichloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.42 J	0.52 J	< 1.0 U	0.53 J	< 1.0 U	0.57 J	0.88 J
1,1,2,2-Tetrachloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1,2-Trichloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	1.4	1.5	1.6	1.7	1.5	1.5	1.6	1.5	1.5	1.3	1.8	2.5
1,1-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,2,3-Trichloropropane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,2-Dibromo-3-chloropropane	µg/L	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
1,2-Dibromoethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	NA	NA	NA	NA	NA	NA	NA
1,2-Dichloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,2-Dichloropropane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,4-Dioxane	µg/L	< 200 U	< 200 U	< 200 U	< 200 U	< 200 U	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U
2-Butanone	µg/L	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U
2-Hexanone	µg/L	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U
4-Methyl-2-pentanone	µg/L	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U
Acetone	µg/L	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	1.2 J	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U
Acetonitrile	µg/L	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U
Acrolein	µg/L	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U
Acrylonitrile	µg/L	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U	< 20 U
Allyl chloride	µg/L	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Benzene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Bromodichloromethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Bromoform	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Bromomethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Carbon disulfide	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Carbon tetrachloride	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Chlorobenzene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Chloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Chloroform	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Chloromethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U



Table 6. DN-13 Monthly Monitoring for 2011, RACER Trust, Moraine, Ohio.

Volatile Organic Compound¹	Units	1/6/2011	2/1/2011	3/1/2011	4/1/2011	5/2/2011	6/1/2011	7/5/2011	8/1/2011	9/12/2011	10/4/2011	11/2/2011	12/15/2011
Chloroprene	µg/L	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	µg/L	6.1	6.5	6.7	7.1	7.0	5.6	6.6	6.6	6.7	5.9	7.2	9.8
cis-1,3-Dichloropropene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Dibromochloromethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Dibromomethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Dichlorodifluoromethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Ethyl methacrylate	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Ethylbenzene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Iodomethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Isobutanol	µg/L	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U
Methyl acrylonitrile	µg/L	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Methyl methacrylate	µg/L	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Methylene chloride	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U*
Propionitrile	µg/L	< 4.0 U	< 4.0 U	< 4.0 U	< 4.0 U	< 4.0 U	< 4.0 U	< 4.0 U	< 4.0 U	< 4.0 U	< 4.0 U	< 4.0 U	< 4.0 U
Styrene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.36 J	0.32 J	0.43 J	0.31 J	0.37 J	0.37 J	0.83 J
Toluene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.37 J	0.43 J	0.44 J	0.52 J	0.38 J	0.56 J	0.69 J
trans-1,3-Dichloropropene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
trans-1,4-Dichloro-2-butene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	NA	NA	NA	NA	NA	NA	NA
Trichloroethene	µg/L	4.7	4.4	4.6	5.4	5.6	5.7	5.4	5.5	5.6	5.1	5.8	9.3
Trichlorofluoromethane (CFC-11)	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Vinyl acetate	µg/L	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Vinyl chloride	µg/L	1.2	1.2	1.3	1.3	1.0	1.1	1.3	1.2	1.1	0.99 J	1.3	1.3
Xylene (total)	µg/L	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	13.4	13.6	14.2	15.5	15.1	15.1	16.2	15.7	16.3	14.0	17.6	25.3

1 - Analytical method for volatile organic compounds (VOC) analysis is SW-846 Method 8260B.

All concentrations in micrograms per liter (µg/L) as reported by the laboratory.

< - Constituent not detected above laboratory reporting limit shown.

U - Constituent not detected above laboratory reporting limit shown.

J - Estimated result less than reporting limit.

NA - Not analyzed.



Table 7. Monitoring Well Construction Details, RACER Trust, Moraine, Ohio.

Well	Surface Elevation	TOC Elevation	Well Diameter	Screened Interval				Borehole Depth	Site Coordinates		State Plane Coordinates		Geologic
	ft msl	ft msl	inches	ft bls	ft bls	ft msl	ft msl	ft bls	Northing, y	Easting, x	Northing, y	Easting, x	Modifiers
Upper Aquifer Wells													
W-1-N	737.61	739.02	4	35	70	703	668	70	6618	5037	625116.2043	1483946.9943	UA:TT
W-2-N	729.68	731.68	4	35	60	695	670	60	5264	4744	623865.9104	1483351.6742	UA
W-3-N	731.98	733.66	4	32	57	700	675	57	5157	5032	623695.8796	1483607.3111	UA
W-4-N	729.88	731.63	4	40	65	690	665	65	5157	5224	623651.9134	1483795.0108	UA:TT
HR-1	730.10	732.71	2	47	57	683	673	57	3420	5205	621967.7490	1483378.1275	UA:TT
HR-2	732.62	734.75	2	47	57	686	676	58	5209	5455	623649.3090	1484030.9226	UA:TT
HR-3	734.31	736.75	2	50	60	684	674	61	5211	5648	623612.1403	1484238.0984	UA:TT
HR-4	740.61	742.60	2	55	65	686	676	67	6111	5214	624582.0074	1484003.5860	UA:TT
HR-5	730.95	734.27	2	44	54	687	677	59	4760	4985	623354.8172	1483478.6541	UA:TT
HR-6	730.18	732.66	2	43	53	687	677	59	4009	4985	622588.6622	1483298.8965	UA:TT
HR-7	731.00	731.73	2	47	57	684	674	58	4743	4678	623373.8266	1483168.5266	UA:TT
HR-8	740.84	743.42	2	54	64	687	677	76	6819	5626	625177.0505	1484566.7534	UA
HR-9	741.00	743.51	2	58	68	683	673	75	7669	5508	626071.2019	1484648.1158	UA
HR-11	740.90	743.33	2	60	70	681	671	75	7313	6207	625682.4858	1485262.9762	UA
HR-16	724.60	727.01	4	42	62	683	663	70	2354	4198	621167.6648	1482171.8435	UA:TT
HR-17	725.40	726.43	4	27	47	698	678	56	2457	4776	621128.4488	1482780.5158	UA:TT
W-1-S	728.23	729.29	4	25	60	703	668	60	2777	4958	621396.0291	1482990.4046	UA:TT
W-2-S	725.01	726.64	4	30	65	695	660	65	1786	4207	620618.7813	1482078.7622	UA:TT
W-3-S	NM	729.17	4	36	76	NA	NA	76	1678	4386	620466.6686	1482207.4451	UA
W-4-S	726.66	727.92	4	30	70	697	657	70	1671	4785	620394.9579	1482564.2035	UA
GM-2	NM	735.81	2	45	55	NA	NA	55	1102	5803	619586.2208	1483427.9998	UA
4S	NM	731.36	4	30	65	NA	NA	65	1071	5564	619578.3226	1483129.6378	UA
GM-6	NM	730.27	2	35	45	NA	NA	45	1042	5306	619627.6172	1482930.9571	UA:TT
GM-8	735.17	735.17	2	40	50	695	685	50	1283	5285	619866.4552	1482965.5535	UA:TT
GM-10	NM	723.90	2	40	50	NA	NA	50	162	5258	618762.6410	1482667.7306	UA:TT
GM-16	NM	725.30	2	48	58	NA	NA	58	652	4566	619420.5576	1482149.1466	UA
GM-17	NM	723.84	2	40	50	NA	NA	50	672	5174	619311.8761	1482697.0210	UA:TT
GM-18	NM	723.80	2	45	55	NA	NA	55	583	4993	619229.5883	1482505.4542	UA
GM-19S	NM	730.92	2	47	57	NA	NA	57	1767	5274	620339.5683	1483017.2551	UA:TT
GM-21	725.36	725.00	2	45	55	680	670	55	1519	6052	619920.5937	1483764.5951	UA:TT
GM-22	731.84	731.63	2	44	54	688	678	54	2531	6285	620840.4209	1484226.5683	UA:TT
GM-23	NM	731.07	2	24	34	NA	NA	34	5393	6018	623699.2336	1484619.9213	UA:TUT
GM-24	747.61	747.29	2	58	68	690	680	70	8122	7812	625945.0802	1486991.6971	UA



Table 7. Monitoring Well Construction Details, RACER Trust, Moraine, Ohio.

Well	Surface Elevation	TOC Elevation	Well Diameter	Screened Interval				Borehole Depth	Site Coordinates		State Plane Coordinates		Geologic
	ft msl	ft msl	inches	ft bls	ft bls	ft msl	ft msl	ft bls	Northing, y	Easting, x	Northing, y	Easting, x	Modifiers
Upper Aquifer Wells													
GM-25	747.05	746.17	2	48	58	699	689	58	4930	8170	622786.2705	1486599.6865	UA:TT
GM-26	722.29	722.29	2	50	60	672	662	60	-988	4961	617729.9788	1482129.0695	UA
GM-27	731.03	730.57	2	40	50	691	681	58	5393	6029	623696.6136	1484630.7659	UA:TT
GM-28 ⁽⁶⁾	NM	736.46	2	22	32	NA	NA	32	5041	5916	623392.3799	1484436.8617	UA:TUT
GM-29	731.31	731.37	2	28	38	703	693	38	5209	5974	623534.4471	1484535.0727	UA:TUT
GM-30 ⁽¹⁾	NM	734.79	2	28	38	NA	NA	38	5559	5970	623876.3465	1484609.5933	UA:TUT
GM-31 ⁽¹⁾	732.05	732.13	2	51	61	681	671	62	2939	5914	621336.9337	1483965.1322	UA:TT
GM-32	732.47	732.08	2	51	61	681	671	61	3486	6070	620114.2493	1483379.9656	UA:TT
GM-33	730.30	729.77	2	48	58	682	672	58	2278	5762	620761.9955	1483714.2282	UA:TT
GM-34	731.06	730.56	2	26	36	705	695	36	2278	5770	620753.8480	1483727.5719	UA:WT
GM-35	731.56	731.27	2	57	67	675	665	70	1750	5510	620389.3810	1483279.5201	UA:TT
GM-36	731.44	731.11	2	25	35	706	696	35	1755	5551	620383.2312	1483300.8386	UA:WT
GM-37	730.36	730.05	2	46	56	684	674	56	1857	5696	620407.3595	1483456.0282	UA:TT
GM-38	730.31	729.88	2	24	34	706	696	34	1858	5686	620403.1387	1483471.6479	UA:WT
GM-43	729.41	729.00	2	40	50	689	679	54	3655	5211	622192.2046	1483441.3723	UA:TT
GM-44	729.30	728.77	2	51	61	678	668	62	3137	5217	621686.3425	1483331.5124	UA:TT
GM-45	730.03	729.75	2	50	60	680	670	60	2853	5217	621409.1769	1483266.9285	UA:TT
GM-46	728.13	727.79	2	19.8	29.8	708	698	29.8	5130	6257	623393.7601	1484777.0271	UA:TUT
GM-47	727.03	726.75	2	49.4	59.4	678	668	59.4	1312	4776	620060.6143	1482479.3608	UA:TT
GM-48	728.98	728.67	2	63.2	73.2	666	656	73.2	610	4200	619488.4287	1481740.8154	UA:TT
GM-49	728.28	727.88	2	66.9	76.9	661	651	76.9	-222	4383	618643.7266	1481742.8231	UA:TT
GM-50	727.03	726.56	2	29.7	39.7	697	687	39.7	1312	4773	620065.0482	1482445.8840	UA:WT
GM-51	728.82	728.30	2	34.3	44.3	695	685	44.3	614	4198	619465.2399	1481753.1472	UA:WT
GM-52	728.16	727.62	2	34	44	694	684	44	-226	4383	618604.5296	1481740.7235	UA:WT
GM-53	730.53	730.35	2	23	33	708	698	33	2999	6824	621184.8324	1484855.6876	UA:TT
GM-55	719.90	719.86	2	25	35	695	685	35	-646	5202	618008.2839	1482441.5719	UA:WT
GM-57 ⁽²⁾	719.41	721.74	2	25	35	694	684	35	-993	4966	617724.0851	1482132.1351	UA:WT
GM-59	732.46	732.25	2	25	35	707	697	35	4501	6323	622761.5281	1484712.7729	UA:WT
GM-60	732.46	732.24	2	42	52	690	680	52	4501	6324	622761.3002	1484712.7809	UA:TT
GM-62 ⁽³⁾	722.17	722.11	2	50	60	672	662	60	-189	5443	618397.3774	1482818.1330	UA
GM-63	726.21	725.79	2	30	40	696	686	40	1625	4919	620283.7218	1482686.3290	UA:WT
GM-64	726.38	725.95	2	50	60	676	666	60	1625	4914	620284.6106	1482681.2885	UA:TT



Table 7. Monitoring Well Construction Details, RACER Trust, Moraine, Ohio.

Well	Surface Elevation	TOC Elevation	Well Diameter	Screened Interval				Borehole Depth	Site Coordinates		State Plane Coordinates		Geologic
	ft msl	ft msl	inches	ft bls	ft bls	ft msl	ft msl	ft bls	Northing, y	Easting, x	Northing, y	Easting, x	Modifiers
Upper Aquifer Wells													
GM-65S	723.94	723.58	2	42	52	682	672	52	-1488	4312	617392.2259	1481382.4271	UA
GM-66	733.50	733.22	2	45	55	688	678	57	4377	5714	622780.3860	1484091.5572	UA:TT
GM-67S	732.54	732.06	2	44	54	689	679	54	4744	6096	623050.0533	1484547.2174	UA:TT
GM-68S	732.48	732.18	2	39.5	49.5	693	683	49.5	4064	6358	622326.2125	1484652.8528	UA:TT
GM-71	737.19	736.82	2	21	31	716	706	37	4494	6849	622633.7567	1485222.9070	UA:TUT
GM-72	737.05	736.78	2	52	62	685	675	67	4496	6861	622633.7567	1485233.9320	UA:TT
GM-74S	732.52	732.17	2	40	50	693	683	50	4198	6417	622444.5430	1484733.8601	UA:TT
GM-75S	738.26	737.69	2	42	52	696	686	52	4605	6635	622790.6745	1485039.3503	UA:TT
GM-76S	739.49	739.00	2	27	37	712	702	37	5396	6730	623538.7809	1485313.4176	UA:TT
GM-77S	741.49	741.14	2	33	43	708	698	43	3618	7743	621576.9342	1485892.0315	UA:TT
GM-78	721.58	721.18	2	40	50	682	672	70	-267	5723	618257.5787	1483035.5947	UA
GM-79	718.54	717.91	2	45	55	674	664	60	-29	3623	618970.9862	1481045.8893	UA:TT
GM-80	716.23	715.82	2	15	25	701	691	25	-1046	3753	617951.2997	1480939.3277	UA:WT
GM-81	715.80	715.31	2	50	60	666	656	90	-1063	3752	617934.8895	1480934.7439	UA
GM-83S	726.44	725.84	2	44	54	682	672	54	3718	3837	622568.7465	1482112.9569	UA:TT
EAST	NM	730.98	2	NA	NA	NA	NA	71	2120	5818	620545.6947	1483674.2190	UA:TT
WEST	NM	731.08	2	NA	NA	NA	NA	52	2004	5463	620509.6228	1483299.0985	UA:TT
WSU-17	726.93	726.18	2	11.69	66.9	715.2	659.3	67	970	5279	619558.2279	1482898.5384	UA:TT
WSU-18	734.18	733.52	2	29.2	69.2	705.0	664.3	69	1004	5458	619554.9290	1483096.6469	UA:TT
WSU-19	727.28	726.62	2	33.4	63.4	693.9	663.2	63	1182	5212	619736.8872	1482880.3995	UA:TT
WSU-22	726.21	726.49	2	NA	NA	NA	NA	52	1625	4917	620311.4363	1482687.2293	UA:TT
WSU-23	724.65	724.90	2	NA	NA	NA	NA	58	1535	4204	620381.0854	1481978.6336	UA:TT
WSU-24	725.10	724.82	2	NA	NA	NA	NA	66	574	5663	619124.1425	1483169.1107	UA:TT
TW-2	NM	733.38	10	35	45	NA	NA	45	1027	5337	619568.4036	1482942.6663	UA:TT
ME-2 ⁽¹⁾	732.38	732.08	2	27	37	705	695	37	2945	5973	621327.2669	1484014.6258	UA:WT
ME-3 ⁽¹⁾	732.23	731.73	2	29	39	703	693	39	2897	5938	621288.3532	1483969.5620	UA:WT
ME-4 ⁽¹⁾	732.05	732.24	2	26	36	706	696	36	2925	5914	621321.4422	1483952.3693	UA:WT
ME-6 ⁽¹⁾	733.09	732.68	2	29	39	704	694	39	3325	5927	621706.9517	1484057.0461	UA:WT
MW-1 ⁽⁴⁾	713.60	715.53	2	61.2	71.2	652	642	71.7	2164	2247	621420.6144	1480209.1127	UA:TT
MW-4 ⁽⁴⁾	707.45	707.19	2	19.6	39.6	688	668	40	-653	692	619035.3250	1478050.0733	UA
MW-5 ⁽⁴⁾	709.59	709.34	2	22.5	42.5	687	667	43	-682	1646	618787.9839	1478971.6197	UA
MW-9 ⁽⁴⁾	713.16	712.85	2	63	73	650	640	73.5	-2309	1798	617169.4849	1478747.1452	UA
Lower Aquifer Wells													
GM-1	NM	735.74	2	90	100	NA	NA	100	1087	5803	619570.7118	1483421.8130	LA
GM-3	NM	730.44	2	90	100	NA	NA	100	1023	5309	619621.9727	1482926.3542	LA
GM-4	NM	731.46	2	140	150	NA	NA	150	1010	5322	619602.7099	1482922.7333	LA
GM-5	NM	731.29	2	90	100	NA	NA	100	1037	5512	619588.6213	1483126.6107	LA



Table 7. Monitoring Well Construction Details, RACER Trust, Moraine, Ohio.

Well	Surface Elevation	TOC Elevation	Well Diameter	Screened Interval				Borehole Depth	Site Coordinates		State Plane Coordinates		Geologic
	ft msl	ft msl	inches	ft bls	ft bls	ft msl	ft msl	ft bls	Northing, y	Easting, x	Northing, y	Easting, x	Modifiers
Lower Aquifer Wells													
GM-7R	NM	735.61	2	80	90	NA	NA	91	1247	5295	619863.8298	1482962.1340	LA
GM-9	NM	724.07	2	90	100	NA	NA	100	146	5247	618771.8670	1482674.1902	LA
GM-11	NM	723.71	2	90	100	NA	NA	100	679	5164	619318.6270	1482694.0524	LA
GM-13	NM	723.82	2	90	100	NA	NA	100	566	4990	619239.1943	1482501.6168	LA
GM-14	NM	723.50	2	140	150	NA	NA	150	611	5030	619244.0886	1482515.5184	LA
GM-15	NM	725.23	2	90	100	NA	NA	100	664	4581	619427.7004	1482156.5128	LA
GM-19D	NM	730.73	4	145	150	NA	NA	150	1775	5298	620339.8625	1483063.5273	LA
GM-20D	NM	727.26	4	87	92	NA	NA	92	619	5699	619177.7271	1483236.8889	LA
GM-39	731.15	730.95	2	106	116	625	615	116	5396	6006	623705.5364	1484609.0626	LA
GM-40	727.28	727.04	2	140	150	587	577	150	3089	4984	621693.8055	1483084.8121	LA
GM-41	731.22	733.65	2	104	114	627	617	114	3430	6684	621635.7801	1484818.4021	LA
GM-42	729.48	729.16	2	140	150	589	579	150	2338	5651	620810.1968	1483562.5296	LA
GM-54	730.51	730.29	2	70	80	661	651	80	2995	6818	621182.1891	1484848.6752	LA
GM-56	719.75	719.52	2	75	85	645	635	85	-646	5209	618006.1752	1482448.5647	LA:NTP
GM-58	735.59	735.46	2	72	82	664	654	82	3451	7183	621541.9882	1485308.7468	LA:BT
GM-61	732.48	732.23	2	70	80	662	652	80	4501	6318	622762.6947	1484707.4691	LA:BT
GM-65D	723.83	723.54	2	85	95	639	629	108	-1491	4311	617389.5183	1481380.4746	LA:NTP
GM-67D	732.64	732.19	2	70	80	663	653	121	4744	6082	623053.5624	1484533.4779	LA:BT
GM-68D	732.46	732.27	2	64	74	668	658	150	4064	6358	622327.5383	1484645.8862	LA:BT
GM-69	732.42	732.08	2	90	100	642	632	140	3022	6352	621314.8199	1484401.6371	LA
GM-70	737.47	737.19	2	72	82	665	655	120	3887	7283	621944.0370	1485505.8829	LA
GM-73	737.34	736.97	2	85	95	652	642	120	4495	6843	622635.9765	1485216.5022	LA
GM-74D	732.49	732.04	2	69	79	663	653	120	4203	6417	622450.0123	1484735.6502	LA:BT
GM-75D	738.13	737.68	2	85	95	653	643	120	4604	6623	622793.2406	1485027.5873	LA
GM-76D	739.48	738.94	2	70	80	669	659	120	5392	6730	623535.2043	1485312.4245	LA:BT
GM-77D	741.52	740.93	2	75	85	667	657	100	3615	7741	621574.4283	1485889.3662	LA:BT
GM-82	732.55	732.14	2	85	95	648	638	119.5	3640	6107	621972.7146	1484304.7894	LA
GM-83D	726.41	725.77	2	110	120	616	606	120	3719	3844	622568.1953	1482120.4685	LA
GM-84	740.44	739.92	2	96.5	106.5	644	634	120	2580	7606	620619.4561	1485522.1487	LA:BT
HR-10	740.90	742.81	4	115	125	626	616	125	7686	5492	626078.4125	1484653.5358	LA:NTP
HR-12	741.00	742.64	4	120	130	621	611	130	7333	6194	625702.3993	1485250.0490	LA
HR-13	733.20	735.03	4	75	85	658	648	85	5221	5665	623616.8315	1484215.3411	LA:BT
HR-14	729.90	731.63	4	78	88	652	642	88	5178	5209	623675.4267	1483782.2839	LA
HR-15	732.10	733.74	4	88	98	644	634	98	5161	5020	623712.7941	1483595.9072	LA
M73C	NM	716.55	NA	NA	NA	NA	NA	NA	180	4539	618973.2537	1482114.3309	LA
MT69 ⁽⁵⁾	719.84	722.71	8	NA	NA	NA	NA	158	-988	5020	617749.1907	1482121.3945	LA
MT576M	750.00	751.46	5	NA	NA	NA	NA	114	4804	9620	622940.2909	1487799.4686	LA



Table 7. Monitoring Well Construction Details, RACER Trust, Moraine, Ohio.

Well	Surface Elevation	TOC Elevation	Well Diameter	Screened Interval				Borehole Depth	Site Coordinates		State Plane Coordinates		Geologic
	ft msl	ft msl	inches	ft bls	ft bls	ft msl	ft msl	ft bls	Northing, y	Easting, x	Northing, y	Easting, x	Modifiers
Lower Aquifer Wells													
MT596M*	759.18	757.73	5	NA	NA	NA	NA	89	6438	10644	624057.1091	1488849.1418	LA
DN-13	724.09	727.54	20	110	170	614	554	170	470	4760	619196.1959	1482267.5426	LA
11B	744.50	742.56	NA	NA	NA	NA	NA	158	4501	7456	622501.4801	1485799.6814	LA
12A	740.86	742.39	18	104	144	637	597	154	4787	7510	622804.0361	1485951.2100	LA
A	NM	739.00	20	155	205	NA	NA	205	6045	6056	624325.4108	1484805.7949	LA
31	NM	734.05	20	90	122	NA	NA	122	5521	6422	623727.4107	1485049.2752	LA
34	NM	733.46	20	107	140	NA	NA	140	4004	6754	622178.4664	1485017.7925	LA
39	NM	732.07	20	117	142	NA	NA	145	5263	6435	623442.4628	1484987.5777	LA
44	733.91	734.62	24	128	166	606	568	NA	6038	5223	624519.7322	1483988.8824	LA
FW-1A	NM	739.89	24	105	166	NA	NA	169	7344	7069	625357.5160	1486090.3366	LA
FW-2	NM	737.48	20	NA	150	NA	NA	160	4470	7259	622516.4369	1485616.6642	LA
FW-3	NM	739.26	20	NA	141	NA	NA	200	4476	6593	622675.0394	1484968.9430	LA
FW-4	NM	731.62	14	NA	136	NA	NA	160	2316	6453	620605.0473	1484338.1137	LA

TOC - Top of Casing.

ft msl - Feet Above Mean Sea Level.

ft bls - Feet Below Land Surface.

(1) - Depth of screened interval and total well depth have been modified from the well log due to site construction.

(2) - Well above grade construction damaged in 2011.

(3) - Abandoned well to be replaced in 2012.

(4) - City of Moraine Monitoring Wells.

(5) - Well unusable - collapsed screen.

(6) - Well flush mount damaged and obstructed at depth.

* Measuring point is top of cement housing.

Site coordinates based on site-specific benchmarks.

State plane coordinates in NAD 83 Ohio South.

UA - Upper Aquifer.

LA - Lower Aquifer.

TT - Top of Till (regional clay till).

TUT - Top of Upper Till (upper clay till).

BT - Below Till (regional clay till).

WT - Water Table (screened across the watertable interface).

NTP - No Till Present.

NA - Not Available.

NM - Not Measured.



Table 8. Groundwater Level Measurements Collected During 2011, RACER Trust, Moraine, Ohio.

Well	Measuring Point Elevation	Depth-to-Water (feet)	Total Depth (feet)	Groundwater Elevation (AMSL)
<u>Upper Aquifer Wells</u>				
W-1-N ¹	739.02	NM	NM	NA
W-2-N	731.68	21.64	59.68	710.04
W-3-N	733.66	23.71	57.63	709.95
W-4-N	731.63	21.61	66.58	710.02
HR-1	732.71	23.51	59.03	709.20
HR-2	734.75	24.68	58.70	710.07
HR-3	736.75	26.67	62.20	710.08
HR-4	742.60	32.14	66.77	710.46
HR-5	734.27	24.39	57.60	709.88
HR-6	732.66	23.31	55.34	709.35
HR-7	731.73	21.89	57.39	709.84
HR-8	743.42	32.84	66.02	710.58
HR-9	743.51	32.62	69.89	710.89
HR-11	743.33	32.39	69.04	710.94
HR-16	727.01	18.42	64.71	708.59
HR-17	726.43	17.60	48.26	708.83
W-1-S	729.29	20.32	58.50	708.97
W-2-S	726.64	18.63	67.04	708.01
W-3-S	729.17	21.15	74.70	708.02
W-4-S	727.92	19.64	72.54	708.28
GM-2	735.81	27.81	56.25	708.00
4S	731.36	23.73	66.16	707.63
GM-6	730.27	22.84	46.27	707.43
GM-8	735.17	27.58	49.98	707.59
GM-10	723.90	16.63	49.60	707.27
GM-16	725.30	17.91	51.10	707.39
GM-17	723.84	16.38	49.58	707.46
GM-18	723.80	16.42	54.24	707.38
GM-19S	730.92	22.53	56.15	708.39
GM-21	725.00	16.77	53.32	708.23
GM-22	731.63	22.51	56.28	709.12
GM-23	731.07	20.86	31.89	710.21
GM-24	747.29	35.76	67.64	711.53
GM-25	746.17	36.25	55.98	709.92
GM-26	722.29	15.66	58.41	706.63
GM-27	730.57	20.41	46.28	710.16
GM-28	736.46	26.40	44.39	710.06
GM-29	731.37	19.82	19.91	711.55
GM-30	734.79	24.60	35.94	710.19
GM-31	732.13	23.10	63.15	709.03
GM-32	732.08	23.78	56.53	708.30
GM-33	729.77	20.94	54.29	708.83
GM-34	730.56	21.73	35.20	708.83
GM-35	731.27	22.98	65.57	708.29
GM-36	731.11	22.73	34.38	708.38



Table 8. Groundwater Level Measurements Collected During 2011, RACER Trust, Moraine, Ohio.

Well	Measuring Point Elevation	Depth-to-Water (feet)	Total Depth (feet)	Groundwater Elevation (AMSL)
<u>Upper Aquifer Wells</u>				
GM-37	730.05	21.38	34.18	708.52
GM-38	729.88	21.53	55.97	710.16
GM-43	729.00	19.72	49.65	709.28
GM-44	728.77	19.78	60.87	708.99
GM-45	729.75	20.13	59.95	709.62
GM-46	727.79	14.98	27.44	712.81
GM-47	726.75	19.02	59.38	707.73
GM-48	728.67	22.48	72.12	706.19
GM-49	727.88	21.26	75.43	706.62
GM-50	726.56	18.89	39.45	707.67
GM-51	728.30	21.22	44.23	707.08
GM-52	727.62	21.00	44.00	706.62
GM-53	730.35	21.32	32.47	709.03
GM-55	719.86	13.05	35.20	706.81
GM-57 ²	NM	15.79	38.08	NA
GM-59	732.25	22.71	34.39	709.54
GM-60	732.24	22.72	50.42	709.52
GM-62 ³	NM	NM	NM	NA
GM-63	725.79	17.79	39.06	708.00
GM-64	725.95	17.94	85.10	708.01
GM-65S	723.58	17.89	52.11	705.69
GM-66	733.22	23.67	54.17	709.55
GM-67S	732.06	22.36	53.58	709.70
GM-68S	732.18	22.77	49.16	709.41
GM-71	736.82	27.29	61.41	709.53
GM-72	736.78	27.26	32.10	709.52
GM-74S	732.17	22.68	48.94	709.49
GM-75S	737.69	28.11	54.40	709.58
GM-76S	739.00	28.93	36.81	710.07
GM-77S	741.14	31.84	42.25	709.30
GM-78	721.18	13.86	49.40	707.32
GM-79	717.91	11.45	54.14	706.46
GM-80	715.82	10.15	24.40	705.67
GM-81	715.31	9.54	59.87	705.77
GM-83S	725.84	16.76	54.30	709.08
EAST	730.98	22.24	71.24	708.74
WEST	731.08	22.40	51.86	708.68
WSU-17	726.18	18.68	65.17	707.50
WSU-18	733.52	25.91	60.56	707.61
WSU-19	726.62	20.53	62.89	706.09
WSU-23	724.90	17.12	57.32	707.78
WSU-24	724.82	17.10	65.41	707.72
TW-2 (ON)	733.38	28.10	NM	705.28
ME-2	732.08	23.00	35.40	709.08
ME-3	731.73	22.69	36.60	709.04
ME-4	732.24	23.22	27.71	709.02
ME-6	732.68	23.68	35.64	709.00



Table 8. Groundwater Level Measurements Collected During 2011, RACER Trust, Moraine, Ohio.

Well	Measuring Point Elevation	Depth-to-Water (feet)	Total Depth (feet)	Groundwater Elevation (AMSL)
<u>Lower Aquifer Wells</u>				
GM-1	735.74	27.97	101.92	707.77
GM-3	730.44	23.04	100.04	707.40
GM-4	731.46	24.08	137.39	707.38
GM-5	731.29	23.87	100.99	707.42
GM-7R	735.61	27.79	91.46	707.82
GM-9	724.07	16.99	99.61	707.08
GM-11	723.71	16.61	99.22	707.10
GM-13	723.82	16.99	99.01	706.83
GM-14	723.50	16.79	149.32	706.71
GM-15	725.23	18.61	98.85	706.62
GM-19D	730.73	22.43	154.75	708.30
GM-20D	727.26	19.30	100.79	707.96
GM-39	730.95	20.75	116.69	710.20
GM-40 ¹	727.04	NM	NM	NA
GM-41	733.65	24.37	116.14	709.28
GM-42	729.16	20.96	150.13	708.20
GM-54	730.29	21.06	79.05	709.23
GM-56	719.52	12.75	85.35	706.77
GM-58	735.46	25.92	83.05	709.54
GM-61	732.23	22.47	78.26	709.76
GM-65D	723.54	17.83	95.36	705.71
GM-67D	732.19	22.38	79.19	709.81
GM-68D	732.27	22.70	74.29	709.57
GM-69	732.08	23.19	99.15	708.89
GM-70	737.19	27.44	81.62	709.75
GM-73	736.97	27.02	95.55	709.95
GM-74D	732.04	22.40	78.82	709.64
GM-75D	737.68	27.62	94.32	710.06
GM-76D	738.94	28.64	80.05	710.30
GM-77D	740.93	31.23	86.32	709.70
GM-82	732.14	23.14	95.36	709.00
GM-83D	725.77	17.42	121.90	708.35
GM-84	739.92	31.01	106.83	708.91
HR-10	742.81	31.90	126.18	710.91
HR-12	742.64	31.70	130.20	710.94
HR-13	735.03	24.91	91.40	710.12
HR-14	731.63	21.72	89.41	709.91
HR-15	733.74	23.94	102.20	709.80
M73C	716.55	9.90	190.31	706.65
MT576M	751.46	NM	NM	NA
MT596M	757.73	40.34	99.50	717.39



Table 8. Groundwater Level Measurements Collected During 2011, RACER Trust, Moraine, Ohio.

Well	Measuring Point Elevation	Depth-to-Water (feet)	Total Depth (feet)	Groundwater Elevation (AMSL)
<u>Production and Fire Wells</u>				
DN-13 (County Well) [ON]	727.78	> 90	NM	< 637.78
11B	742.56	32.64	NM	709.92
12A	742.39	32.30	NM	710.09
31	734.05	NM	NM	NA
34	733.46	23.75	NM	709.71
39	732.07	NM	NM	NA
A	739.00	26.98	NM	712.02
FW-1A	739.89	29.83	NM	710.06
FW-2	737.48	27.42	NM	710.06
FW-3	739.26	29.19	NM	710.07
FW-4	731.62	23.12	NM	708.50
<u>Stream Gauge*</u>				
SG1	747.64	NM	NA	NA
SG2	709.95	0.70	NA	709.25
SG3	718.45	6.94	NA	711.51
SG4	714.78	4.72	NA	710.06
SG5	711.10	NM	NA	NA
SG6	723.21	13.62	NA	709.59
SG7	731.55	Dry	NA	NA
<u>IRZ Wells</u>				
RZ-3MM	726.92	18.78	47.95	708.14
RZ-4A	725.71	NM	NM	NA
RZ-4D	727.07	18.90	44.90	708.17
RZ-4L	727.54	19.58	59.05	707.96
<u>Moraine City</u>				
MW-1	715.53	8.63	71.62	706.90
MW-4	707.19	4.79	37.21	702.40
MW-5	709.34	5.65	29.88	703.69
MW-9	712.85	10.18	71.54	702.67

Measuring point is to top of the well casing or surveyed measuring point.

Groundwater elevations are reported in feet above mean sea level (AMSL).

Groundwater levels were measured on September 27 to 28, 2011 using an electronic water level indicator (more than one meter was used and groundwater elevations reflect a calibration factor).

Groundwater level measurements are reported in feet below the measuring point.

1 - Well could not be located.

2 - Well damaged.

3 - Well was abandoned (GM-62) or damaged (GM-57) by ODOT during reconstruction of I 75 interchange.

NM - Not Measured.

NA - Not Applicable.

*Surface water measurement.

Dry - Low stream level, no measurable water.



Table 9. Summary of Precipitation Measurements Recorded by the National Weather Service, During 2011 - Dayton, Ohio.

Date	Actual Precipitation	Average Precipitation	Departure from Average
January	1.43	2.54	1.11 below
February	4.55	2.12	2.43 above
March	4.12	3.23	0.89 above
April	8.72	3.91	4.81 above
May	6.06	4.29	1.77 above
June	2.56	4.07	1.51 below
July	2.22	3.74	1.52 below
August	2.02	3.07	1.05 below
September	10.84	2.94	7.90 above
October	3.00	2.55	0.45 above
November	5.81	3.12	2.69 above
December	5.43	2.89	2.54 above
2011 Total	56.76	38.47	18.29 above average

All precipitation measurements are reported in inches.

Information obtained from the NOAA Website (<http://www7.ncdc.noaa.gov/IPSLcd/lcd.html>)



Table 10. Vertical Gradients for Shallow/Deep Well Pairs in 2011, RACER Trust Moraine, Ohio.

	Vertical Gradients September 27 and 28, 2011	
Upper/Lower Wells	Direction	Gradient (ft/ft)
<u>Upgradient</u>		
HR-9/HR-10	U	0.0004
HR-11/HR-12	NA	0.0000
<u>On-Site</u>		
W-3-N/HR-15	D	-0.0031
W-4-N/HR-14	D	-0.0036
HR-3/HR-13	U	0.0016
GM-2/GM-1	D	-0.0051
GM-6/GM-3	D	-0.0005
4S/GM-5	D	-0.0044
GM-68S/GM-68D	U	0.0067
GM-75S/GM-75D	U	0.0112
<u>Former Oil House Area</u>		
GM-23/GM-27 ⁽¹⁾	D	-0.0031
GM-23/GM-39	D	-0.0001
<u>Off-Site/Downgradient</u>		
GM-10/GM-9	D	-0.0126
GM-16/GM-15	D	-0.0760
GM-18/GM-13	D	-0.0207
GM-17/GM-11	U	0.0058
GM-55/GM-56	D	-0.0009
GM-65S/GM-65D	U	0.0005

(1) - Vertical gradient from upper aquifer above the upper clay till (GM-23) to the upper aquifer below the upper clay till.

D - Downward Gradient (-).

U - Upward Gradient (+).

NA - Not Applicable.

ft/ft - Feet per Feet.



Table 11. Corrective Action Monitoring Results for Comparison to Remediation Target Levels (RTLs), RACER Trust, Moraine, Ohio.

			2011				2010				RTL (mg/L)	2011			2010			2009			1999				
			# Analytes # Detects	Min Value (mg/L)	Mean Value (mg/L)	Max Value (mg/L)	# Analytes # Detects	Min Value (mg/L)	Mean Value (mg/L)	Max Value (mg/L)		Ratio: Min 2011 Value to RTL	Ratio: Mean 2011 Value to RTL	Ratio Max 2011 Value to RTL	Ratio: Min 2010 Value to RTL	Ratio: Mean 2010 Value to RTL	Ratio Max 2010 Value to RTL	Ratio: Min 2009 Value to RTL	Ratio: Mean 2009 Value to RTL	Ratio Max 2009 Value to RTL	Ratio: Min 1999 Value to RTL	Ratio: Mean 1999 Value to RTL	Ratio Max 1999 Value to RTL		
Aquifer	Remediation Zone	Chemical	2	0	6.5E-03	8.3E-03	1.0E-02	2	0	1.0E-02	1.1E-02	1.1E-02	7.0E-01	9.3E-03	1.2E-02	1.4E-02	1.4E-02	1.5E-02	1.6E-02	1.4E-03	2.6E-03	3.4E-03	1.9E-03	9.3E-01	7.3E+00
Shallow	AOI 7 Shallow	1,1-Dichloroethene	2	2	4.7E-01	5.3E-01	5.8E-01	2	2	4.9E-01	5.8E-01	6.6E-01	7.0E+00	6.7E-02	7.5E-02	8.3E-02	7.0E-02	8.2E-02	9.4E-02	8.6E-02	1.2E-01	1.6E-01	3.6E-04	7.4E-01	1.4E+00
Shallow	AOI 7 Shallow	cis-1,2-Dichloroethene	2	2	1.3E-02	3.5E-02	5.7E-02	2	2	1.7E-02	3.4E-02	5.0E-02	5.0E-01	2.6E-02	7.0E-02	1.1E-01	3.4E-02	6.7E-02	1.0E-01	3.0E-02	3.6E-02	4.2E-02	1.9E-02	8.0E+00	1.4E+01
Shallow	AOI 7 Shallow	Tetrachloroethene	2	2	3.3E-02	1.8E-01	3.2E-01	2	2	1.7E-02	1.7E-01	3.3E-01	5.0E-01	6.6E-02	3.5E-01	6.4E-01	3.4E-02	3.5E-01	6.6E-01	1.7E-02	5.0E-01	7.4E-01	5.0E-03	2.8E+00	1.0E+01
Shallow	AOI 7 Shallow	Trichloroethene	2	2	5.2E-02	4.5E-01	8.4E-01	2	2	5.9E-02	2.8E-01	5.0E-01	2.0E-01	2.6E-01	2.2E+00	4.2E+00	3.0E-01	1.4E+00	2.5E+00	3.5E-01	2.2E+00	5.5E+00	5.0E-03	7.5E+00	1.3E+01
Shallow	AOI 7 Shallow	Vinyl Chloride	2	2	5.2E-02	4.5E-01	8.4E-01	2	2	5.9E-02	2.8E-01	5.0E-01	2.0E-01	2.6E-01	2.2E+00	4.2E+00	3.0E-01	1.4E+00	2.5E+00	3.5E-01	2.2E+00	5.5E+00	5.0E-03	7.5E+00	1.3E+01
Shallow	Zone S1	1,1-Dichloroethene	1	0	5.0E-04	5.0E-04	5.0E-04	1	0	5.0E-04	5.0E-04	5.0E-04	6.3E-01	7.9E-04	7.9E-04	7.9E-04	7.9E-04	7.9E-04	7.9E-04	1.5E-04	1.5E-04	1.5E-04	7.9E-04	7.9E-04	7.9E-04
Shallow	Zone S1	cis-1,2-Dichloroethene	1	1	7.2E-04	7.2E-04	7.2E-04	1	1	2.1E-03	2.1E-03	2.1E-03	6.3E+00	1.1E-04	1.1E-04	1.1E-04	3.3E-04	3.3E-04	3.3E-04	6.2E-05	1.6E-04	3.7E-04	2.9E-02	2.9E-02	2.9E-02
Shallow	Zone S1	Tetrachloroethene	1	1	6.3E-04	6.3E-04	6.3E-04	1	0	5.0E-04	5.0E-04	5.0E-04	4.5E-01	1.4E-03	1.4E-03	1.4E-03	1.1E-03	1.1E-03	1.1E-03	3.3E-04	3.3E-04	3.3E-04	7.1E-01	7.1E-01	7.1E-01
Shallow	Zone S1	Trichloroethene	1	1	4.1E-04	4.1E-04	4.1E-04	1	0	5.0E-04	5.0E-04	5.0E-04	4.5E-01	9.1E-04	9.1E-04	9.1E-04	1.1E-03	1.1E-03	1.1E-03	1.0E-03	1.1E-03	1.3E-03	1.7E+00	1.7E+00	1.7E+00
Shallow	Zone S1	Vinyl Chloride	1	1	5.7E-04	5.7E-04	5.7E-04	1	1	2.2E-03	2.2E-03	2.2E-03	1.8E-01	3.2E-03	3.2E-03	3.2E-03	1.2E-02	1.2E-02	1.2E-02	5.3E-03	9.4E-03	1.8E-02	1.8E-02	1.8E-02	1.8E-02
Shallow	Zone S1 to S2	1,1-Dichloroethene	1	0	5.0E-04	5.0E-04	5.0E-04	1	0	5.0E-04	5.0E-04	5.0E-04	1.3E-01	3.8E-03	3.8E-03	3.8E-03	3.8E-03	3.8E-03	3.8E-03	7.3E-04	7.3E-04	7.3E-04	3.8E-03	3.8E-03	3.8E-03
Shallow	Zone S1 to S2	cis-1,2-Dichloroethene	1	1	7.2E-04	7.2E-04	7.2E-04	1	1	2.1E-03	2.1E-03	2.1E-03	1.3E+00	5.5E-04	5.5E-04	5.5E-04	1.6E-03	1.6E-03	1.6E-03	3.0E-04	7.7E-04	1.8E-03	1.4E-01	1.7E-01	2.0E-01
Shallow	Zone S1 to S2	Tetrachloroethene	1	1	6.3E-04	6.3E-04	6.3E-04	1	0	5.0E-04	5.0E-04	5.0E-04	9.5E-02	6.6E-03	6.6E-03	6.6E-03	5.3E-03	5.3E-03	5.3E-03	1.6E-03	1.6E-03	1.6E-03	2.2E+00	2.7E+00	3.4E+00
Shallow	Zone S1 to S2	Trichloroethene	1	1	4.1E-04	4.1E-04	4.1E-04	1	0	5.0E-04	5.0E-04	5.0E-04	9.5E-02	4.3E-03	4.3E-03	4.3E-03	5.3E-03	5.3E-03	5.3E-03	4.7E-03	5.2E-03	6.1E-03	4.9E+00	6.5E+00	8.1E+00
Shallow	Zone S1 to S2	Vinyl Chloride	1	1	5.7E-04	5.7E-04	5.7E-04	1	1	2.2E-03	2.2E-03	2.2E-03	3.8E-02	1.5E-02	1.5E-02	1.5E-02	5.8E-02	5.8E-02	5.8E-02	2.5E-02	4.5E-02	8.7E-02	1.3E-02	5.0E-02	8.4E-02
Shallow	Zone S2	1,1-Dichloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	7.0E-02	NA	NA	NA	NA	NA	NA	NA	NA	NA	7.1E-03	1.4E-02	3.6E-02
Shallow	Zone S2	cis-1,2-Dichloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	7.0E-01	NA	NA	NA	NA	NA	NA	NA	NA	NA	3.6E-03	9.7E-02	3.7E-01
Shallow	Zone S2	Tetrachloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	5.0E-02	NA	NA	NA	NA	NA	NA	NA	NA	NA	2.6E-02	1.4E+00	4.2E+00
Shallow	Zone S2	Trichloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	5.0E-02	NA	NA	NA	NA	NA	NA	NA	NA	NA	5.0E-02	2.8E+00	9.4E+00
Shallow	Zone S2	Vinyl Chloride	0	0	NS	NS	NS	0	0	NS	NS	NS	2.0E-02	NA	NA	NA	NA	NA	NA	NA	NA	NA	2.5E-02	3.2E-02	5.0E-02
Shallow	Zone S2 to S3	1,1-Dichloroethene	2	1	6.4E-04	5.7E-04	6.4E-04	2	1	5.0E-04	7.4E-04	9.7E-04	6.3E-02	1.0E-02	9.0E-03	1.0E-02	7.9E-03	1.2E-02	1.5E-02	1.5E-03	8.7E-03	1.6E-02	7.9E-03	1.3E-02	4.0E-02
Shallow	Zone S2 to S3	cis-1,2-Dichloroethene	2	2	8.9E-03	3.8E-02	6.6E-02	2	2	9.1E-03	4.1E-02	7.3E-02	6.3E-01	1.4E-02	6.0E-02	1.0E-01	1.4E-02	6.5E-02	1.2E-01	1.4E-02	6.7E-02	1.2E-01	7.9E-04	6.5E-02	4.1E-01
Shallow	Zone S2 to S3	Tetrachloroethene	2	2	1.7E-02	2.4E-02	3.1E-02	2	2	3.1E-02	3.4E-02	3.7E-02	4.5E-02	3.8E-01	5.3E-01	6.9E-01	6.9E-01	7.6E-01	8.2E-01	7.3E-01	8.0E-01	8.7E-01	2.9E-02	1.2E+00	4.7E+00
Shallow	Zone S2 to S3	Trichloroethene	2	2	2.1E-02	4.0E-02	5.9E-02	2	2	2.0E-02	7.0E-02	1.2E-01	4.5E-02	4.7E-01	8.9E-01	1.3E+00	4.4E-01	1.6E+00	2.7E+00	5.1E-01	1.6E+00	2.7E+00	5.6E-02	2.0E+00	1.0E+01
Shallow	Zone S2 to S3	Vinyl Chloride	2	1	7.7E-03	4.1E-03	7.7E-03	2	1	5.0E-04	2.4E-03	4.3E-03	1.8E-02	4.3E-01	2.3E-01	4.3E-01	2.8E-02	1.3E-01	2.4E-01	6.1E-03	1.3E-01	2.6E-01	2.8E-02	3.2E-02	5.6E-02
Shallow	Zone S3	1,1-Dichloroethene	1	0	5.0E-04	5.0E-04	5.0E-04	2	0	5.0E-04	1.7E-03	2.9E-03	4.9E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	3.5E-02	5.9E-02	1.9E-03	6.3E-03	1.5E-02	1.0E-02	4.7E-02	8.0E-02
Shallow	Zone S3	cis-1,2-Dichloroethene	1	1	9.9E-03	9.9E-03	9.9E-03	2	2	3.1E-03	3.5E-03	3.9E-03	4.9E-01	2.0E-02	2.0E-02	2.0E-02	6.3E-03	7.1E-03	8.0E-03	1.4E-03	1.7E-02	3.1E-02	5.3E-03	9.0E-02	1.3E-01
Shallow	Zone S3	Tetrachloroethene	1	0	5.0E-04	5.0E-04	5.0E-04	2	1	5.0E-04	7.3E-02	1.5E-01	3.5E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	2.1E+00	4.1E+00	4.3E-03	7.1E-01	3.1E+00	1.4E-02	4.0E-02	7.1E-02
Shallow	Zone S3	Trichloroethene	1	1	1.9E-02	1.9E-02	1.9E-02	2	2	3.2E-03	6.9E-02	1.4E-01	3.5E-02	5.4E-01	5.4E-01	5.4E-01	9.1E-02	2.0E+00	3.9E+00	2.0E-02	7.7E-01	3.4E+00	9.1E-02	4.6E+00	1.3E+01
Shallow	Zone S3	Vinyl Chloride	1	1	6.2E-03	6.2E-03	6.2E-03	2	1	2.9E-03	3.3E-03	3.6E-03	1.4E-02	4.4E-01	4.4E-01	4.4E-01	2.1E-01	2.3E-01	2.6E-01	3.9E-02	3.6E-01	1.0E+00	3.6E-02	1.1E-01	2.1E-01
Shallow	Zone S3 to GM-10/GM-52	1,1-Dichloroethene	6	0	5.0E-04	9.0E-04	1.7E-03	8	0	5.0E-04	1.3E-03	2.5E-03	3.5E-02	1.4E-02	2.6E-02	4.7E-02	1.4E-02	3.8E-02	7.1E-02	2.7E-03	7.1E-03	2.1E-02	1.4E-02	3.7E-02	1.1E-01
Shallow	Zone S3 to GM-10/GM-52	cis-1,2-Dichloroethene	6	5	3.7E-03	1.3E-02	3.4E-02	8	7	5.0E-04	1.5E-02	5.1E-02	3.5E-01	1.1E-02	3.7E-02	9.7E-02	1.4E-03	4.2E-02	1.5E-01	2.4E-04	3.1E-02	1.7E-01	1.4E-03	8.0E-02	1.9E-01
Shallow	Zone S3 to GM-10/GM-52	Tetrachloroethene	6	3	5.2E-02	3.5E-02	9.5E-02	8	7	3.8E-04	6.1E-02	1.3E-01	2.5E-02	2.1E+00	1.4E+00	3.8E+00	1.5E-02</								



Table 11. Corrective Action Monitoring Results for Comparison to Remediation Target Levels (RTLs), RACER Trust, Moraine, Ohio.

			2011				2010				RTL (mg/L)	2011			2010			2009			1999				
			# Analytes # Detects	Min Value (mg/L)	Mean Value (mg/L)	Max Value (mg/L)	# Analytes # Detects	Min Value (mg/L)	Mean Value (mg/L)	Max Value (mg/L)		Ratio: Min 2011 Value to RTL	Ratio: Mean 2011 Value to RTL	Ratio Max 2011 Value to RTL	Ratio: Min 2010 Value to RTL	Ratio: Mean 2010 Value to RTL	Ratio Max 2010 Value to RTL	Ratio: Min 2009 Value to RTL	Ratio: Mean 2009 Value to RTL	Ratio Max 2009 Value to RTL	Ratio: Min 1999 Value to RTL	Ratio: Mean 1999 Value to RTL	Ratio Max 1999 Value to RTL		
Aquifer	Remediation Zone	Chemical	2	0	6.5E-03	8.3E-03	1.0E-02	2	0	1.0E-02	1.1E-02	1.1E-02	2.3E-01	2.8E-02	3.6E-02	4.3E-02	4.3E-02	4.6E-02	4.8E-02	4.1E-03	7.8E-03	1.0E-02	5.7E-03	2.8E+00	2.2E+01
Deep	AOI 7 Deep	cis-1,2-Dichloroethene	2	2	4.7E-01	5.3E-01	5.8E-01	2	2	4.9E-01	5.8E-01	6.6E-01	2.3E+00	2.0E-01	2.3E-01	2.5E-01	2.1E-01	2.5E-01	2.9E-01	2.6E-01	3.7E-01	4.8E-01	1.1E-03	2.3E+00	4.2E+00
Deep	AOI 7 Deep	Tetrachloroethene	2	2	1.3E-02	3.5E-02	5.7E-02	2	2	1.7E-02	3.4E-02	5.0E-02	1.7E-01	7.6E-02	2.1E-01	3.4E-01	1.0E-01	2.0E-01	2.9E-01	8.8E-02	1.1E-01	1.2E-01	5.6E-02	2.4E+01	4.2E+01
Deep	AOI 7 Deep	Trichloroethene	2	2	3.3E-02	1.8E-01	3.2E-01	2	2	1.7E-02	1.7E-01	3.3E-01	1.7E-01	1.9E-01	1.0E+00	1.9E+00	1.0E-01	1.0E+00	1.9E+00	4.9E-02	1.5E+00	2.2E+00	1.5E-02	8.2E+00	3.0E+01
Deep	AOI 7 Deep	Vinyl Chloride	2	2	5.2E-02	4.5E-01	8.4E-01	2	2	5.9E-02	2.8E-01	5.0E-01	6.7E-02	7.8E-01	6.7E+00	1.3E+01	8.8E-01	4.2E+00	7.5E+00	1.0E+00	6.4E+00	1.6E+01	1.5E-02	2.2E+01	3.9E+01
Deep	GM-40/41/54	1,1-Dichloroethene	1	0	2.0E-03	2.0E-03	2.0E-03	2	0	1.3E-03	1.9E-03	2.5E-03	6.1E-02	3.3E-02	3.3E-02	3.3E-02	2.1E-02	3.1E-02	4.1E-02	7.9E-03	7.9E-03	7.9E-03	NA	NA	NA
Deep	GM-40/41/54	cis-1,2-Dichloroethene	1	0	2.0E-03	2.0E-03	2.0E-03	2	0	1.3E-03	1.9E-03	2.5E-03	6.1E-01	3.3E-03	3.3E-03	3.3E-03	2.1E-03	3.1E-03	4.1E-03	7.0E-04	7.0E-04	7.0E-04	NA	NA	NA
Deep	GM-40/41/54	Tetrachloroethene	1	1	9.0E-02	9.0E-02	9.0E-02	2	2	9.2E-02	1.1E-01	1.2E-01	4.3E-02	2.1E+00	2.1E+00	2.1E+00	2.1E+00	2.5E+00	2.8E+00	2.8E+00	2.8E+00	2.8E+00	NA	NA	NA
Deep	GM-40/41/54	Trichloroethene	1	1	2.8E-03	2.8E-03	2.8E-03	2	2	2.2E-03	2.3E-03	2.4E-03	4.3E-02	6.5E-02	6.5E-02	6.5E-02	5.1E-02	5.3E-02	5.6E-02	6.7E-02	6.7E-02	6.7E-02	NA	NA	NA
Deep	GM-40/41/54	Vinyl Chloride	1	0	2.0E-03	2.0E-03	2.0E-03	2	0	1.3E-03	1.9E-03	2.5E-03	1.7E-02	1.2E-01	1.2E-01	1.2E-01	7.6E-02	1.1E-01	1.5E-01	3.2E-02	3.2E-02	3.2E-02	NA	NA	NA
Deep	GM-42	1,1-Dichloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	3.3E-02	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Deep	GM-42	cis-1,2-Dichloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	3.3E-01	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Deep	GM-42	Tetrachloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	2.3E-02	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Deep	GM-42	Trichloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	2.3E-02	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Deep	GM-42	Vinyl Chloride	0	0	NS	NS	NS	0	0	NS	NS	NS	9.3E-03	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Deep	Zone D1	1,1-Dichloroethene	1	0	5.0E-04	5.0E-04	5.0E-04	1	0	5.0E-04	5.0E-04	5.0E-04	7.0E-03	7.1E-02	7.1E-02	7.1E-02	7.1E-02	7.1E-02	7.1E-02	1.4E-02	1.4E-02	1.4E-02	7.1E-02	7.1E-02	7.1E-02
Deep	Zone D1	cis-1,2-Dichloroethene	1	1	1.7E-03	1.7E-03	1.7E-03	1	1	2.4E-03	2.4E-03	2.4E-03	7.0E-02	2.4E-02	2.4E-02	2.4E-02	3.4E-02	3.4E-02	3.4E-02	3.0E-02	3.0E-02	3.0E-02	1.7E-02	1.7E-02	1.7E-02
Deep	Zone D1	Tetrachloroethene	1	0	5.0E-04	5.0E-04	5.0E-04	1	0	5.0E-04	5.0E-04	5.0E-04	5.0E-03	1.0E-01	1.0E-01	1.0E-01	1.0E-01	1.0E-01	1.0E-01	3.0E-02	3.0E-02	3.0E-02	1.0E-01	1.0E-01	1.0E-01
Deep	Zone D1	Trichloroethene	1	1	1.8E-03	1.8E-03	1.8E-03	1	1	9.8E-04	9.8E-04	9.8E-04	5.0E-03	3.6E-01	3.6E-01	3.6E-01	2.0E-01	2.0E-01	2.0E-01	3.4E-01	3.4E-01	3.4E-01	2.8E+00	2.8E+00	2.8E+00
Deep	Zone D1	Vinyl Chloride	1	1	8.6E-03	8.6E-03	8.6E-03	1	1	9.9E-03	9.9E-03	9.9E-03	2.0E-03	4.3E+00	4.3E+00	4.3E+00	5.0E+00	5.0E+00	5.0E+00	7.0E+00	7.0E+00	7.0E+00	7.5E-01	7.5E-01	7.5E-01
Deep	Zone D2	1,1-Dichloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	1.3E-02	NA	NA	NA	NA	NA	NA	NA	NA	NA	3.8E-02	3.8E-02	3.8E-02
Deep	Zone D2	cis-1,2-Dichloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	1.3E-01	NA	NA	NA	NA	NA	NA	NA	NA	NA	3.8E-03	6.2E-03	8.5E-03
Deep	Zone D2	Tetrachloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	9.2E-03	NA	NA	NA	NA	NA	NA	NA	NA	NA	1.3E-01	1.7E-01	2.2E-01
Deep	Zone D2	Trichloroethene	0	0	NS	NS	NS	0	0	NS	NS	NS	9.2E-03	NA	NA	NA	NA	NA	NA	NA	NA	NA	8.2E-01	2.1E+00	3.4E+00
Deep	Zone D2	Vinyl Chloride	0	0	NS	NS	NS	0	0	NS	NS	NS	3.7E-03	NA	NA	NA	NA	NA	NA	NA	NA	NA	1.4E-01	1.4E-01	1.4E-01
Deep	POC Deep	1,1-Dichloroethene	3	0	5.0E-04	5.7E-04	7.0E-04	3	0	5.0E-04	5.0E-04	5.0E-04	7.0E-03	7.1E-02	8.1E-02	1.0E-01	7.1E-02	7.1E-02	7.1E-02	1.4E-02	1.4E-02	1.4E-02	7.1E-02	7.1E-02	7.1E-02
Deep	POC Deep	cis-1,2-Dichloroethene	3	1	1.1E-03	7.7E-04	1.1E-03	3	1	5.0E-04	6.7E-04	1.0E-03	7.0E-02	1.6E-02	1.1E-02	1.6E-02	7.1E-03	9.5E-03	1.4E-02	1.2E-03	5.6E-03	1.4E-02	7.1E-03	2.6E-02	6.1E-02
Deep	POC Deep	Tetrachloroethene	3	2	1.1E-03	1.3E-03	2.2E-03	3	2	5.0E-04	1.4E-03	2.2E-03	5.0E-03	2.2E-01	2.5E-01	4.4E-01	1.0E-01	2.8E-01	4.4E-01	3.0E-02	2.6E-01	4.0E-01	1.0E-01	1.7E-01	3.0E-01
Deep	POC Deep	Trichloroethene	3	3	4.7E-03	1.1E-02	2.4E-02	3	3	6.5E-03	1.5E-02	3.1E-02	5.0E-03	9.4E-01	2.2E+00	4.8E+00	1.3E+00	2.9E+00	6.2E+00	1.3E+00	3.4E+00	7.4E+00	1.0E-01	1.3E+00	3.0E+00
Deep	POC Deep	Vinyl Chloride	3	0	5.0E-04	5.7E-04	7.0E-04	3	0	5.0E-04	5.0E-04	5.0E-04	2.0E-03	2.5E-01	2.8E-01	3.5E-01	2.5E-01	2.5E-01	2.5E-01	5.5E-02	5.5E-02	5.5E-02	2.5E-01	2.5E-01	2.5E-01

BOLD indicates concentration exceeds RTL.

mg/L - Milligrams per liter.

NA - Not Applicable.

NS - Not sampled.

RTL - Remediation Target Levels developed by Environ and based on Groundwater Flow Model updated in 2008 to reflect pumping conditions without interim measures (ARCADIS, 2008).



Table 12. Source Concentrations and Estimated Contributions to Receptor Points for In-Place Waste Management Units, RACER Trust, Moraine, Ohio.

			Unit Maximum Downgradient Groundwater Concentration (mg/L)					Unit Estimated Contributions to Groundwater Concentrations (mg/L) at the West Carrollton Receptor Point (Pumping Scenario 1a - Table E-1)					Unit Estimated Contributions to Groundwater Concentrations (mg/L) at the Great Miami River Receptor Point (Pumping Scenario 1a - Table E-1)				
	Unit	MCL	Landfill L1	Landfill L2	Landfill L3	North Settling Lagoon	South Settling Lagoon	Landfill L1	Landfill L2	Landfill L3	North Settling Lagoon	South Settling Lagoon	Landfill L1	Landfill L2	Landfill L3	North Settling Lagoon	South Settling Lagoon
<u>Volatile Organic Compound</u>																	
1,1,1-Trichloroethane	mg/L	0.2	ND	ND	ND	ND	0.0016	NA	NA	NA	NA	3.44E-05	NA	NA	NA	NA	6.80E-07
1,1-Dichloroethane	mg/L	NA	0.0045	0.0064	0.0064	0.0024	0.0015	3.16E-07	3.98E-05	9.39E-05	4.49E-05	3.23E-05	3.042E-09	1.75E-06	6.53E-06	3.53E-06	6.38E-07
1,1-Dichloroethene	mg/L	0.007	ND	ND	ND	ND	ND	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Benzene	mg/L	0.005	0.001	ND	ND	ND	ND	7.02E-08	NA	NA	NA	NA	6.76E-10	NA	NA	NA	NA
cis-1,2-Dichloroethene	mg/L	0.07	0.009	0.0097	0.0097	0.053	0.0089	6.32E-07	6.03E-05	1.42E-04	9.91E-04	1.91E-04	6.084E-09	2.66E-06	9.89E-06	7.79E-05	3.78E-06
Ethylbenzene	mg/L	0.7	ND	ND	ND	ND	ND	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Tetrachloroethene	mg/L	0.005	ND	0.0011	0.0011	0.0011	0.031	NA	6.84E-06	1.61E-05	2.06E-05	6.67E-04	NA	3.01E-07	1.12E-06	1.62E-06	1.32E-05
Toluene	mg/L	1	ND	ND	ND	ND	ND	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
trans-1,2-Dichloroethene	mg/L	0.1	0.00084	0.00059	0.00059	0.0008	0.0014	5.90E-08	3.67E-06	8.65E-06	1.50E-05	3.01E-05	5.6784E-10	1.62E-07	6.02E-07	1.18E-06	5.95E-07
Trichloroethene	mg/L	0.005	0.00075	0.0099	0.0099	0.0099	0.021	5.27E-08	6.16E-05	1.45E-04	1.85E-04	4.52E-04	5.07E-10	2.71E-06	1.01E-05	1.46E-05	8.93E-06
Vinyl chloride	mg/L	0.002	0.0015	ND	ND	0.0027	ND	1.05E-07	NA	NA	5.05E-05	NA	1.014E-09	NA	NA	3.97E-06	NA
Xylene (total)	mg/L	10	ND	ND	ND	ND	ND	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

mg/L - Milligrams per liter.

ND - Non detect.

NA - Not applicable.

Landfill L1 source area characterization wells (GM-2, GM-6, 4S).

Landfill L2 source area characterization wells (W-4-N, HR-2, HR-3).

Landfill L3 source area characterization wells (W-4-N, HR-2, HR-4).

North Settling Lagoon source characterization wells (W-2-N, W-3-N, W-4-N).

South Settling Lagoon source characterization wells (W-2-S, W-3-S, W-4-S).

West Carrollton Well Field Source Reduction Factor
(average of three wells) from Table E-1:

Landfill L1 = 7.02E-05

Landfill L2 = 6.22E-03

Landfill L3 = 1.47E-02

North Settling Lagoon = 1.87E-02

South Settling Lagoon = 2.15E-02

The Great Miami River Source Reduction Factor
from Table E-1:


Landfill L1 = 6.76E-07

Landfill L2 = 2.74E-04

Landfill L3 = 1.02E-03

North Settling Lagoon = 1.47E-03

South Settling Lagoon = 4.25E-04




- LEGEND**
- PROPERTY BOUNDARY
 - RIVER LEVEE
 - FORMER BUILDING FOOTPRINT
 - SURFACE WATER FEATURE


RACER TRUST
MORaine, OHIO
OH000294.2012

SITE LAYOUT



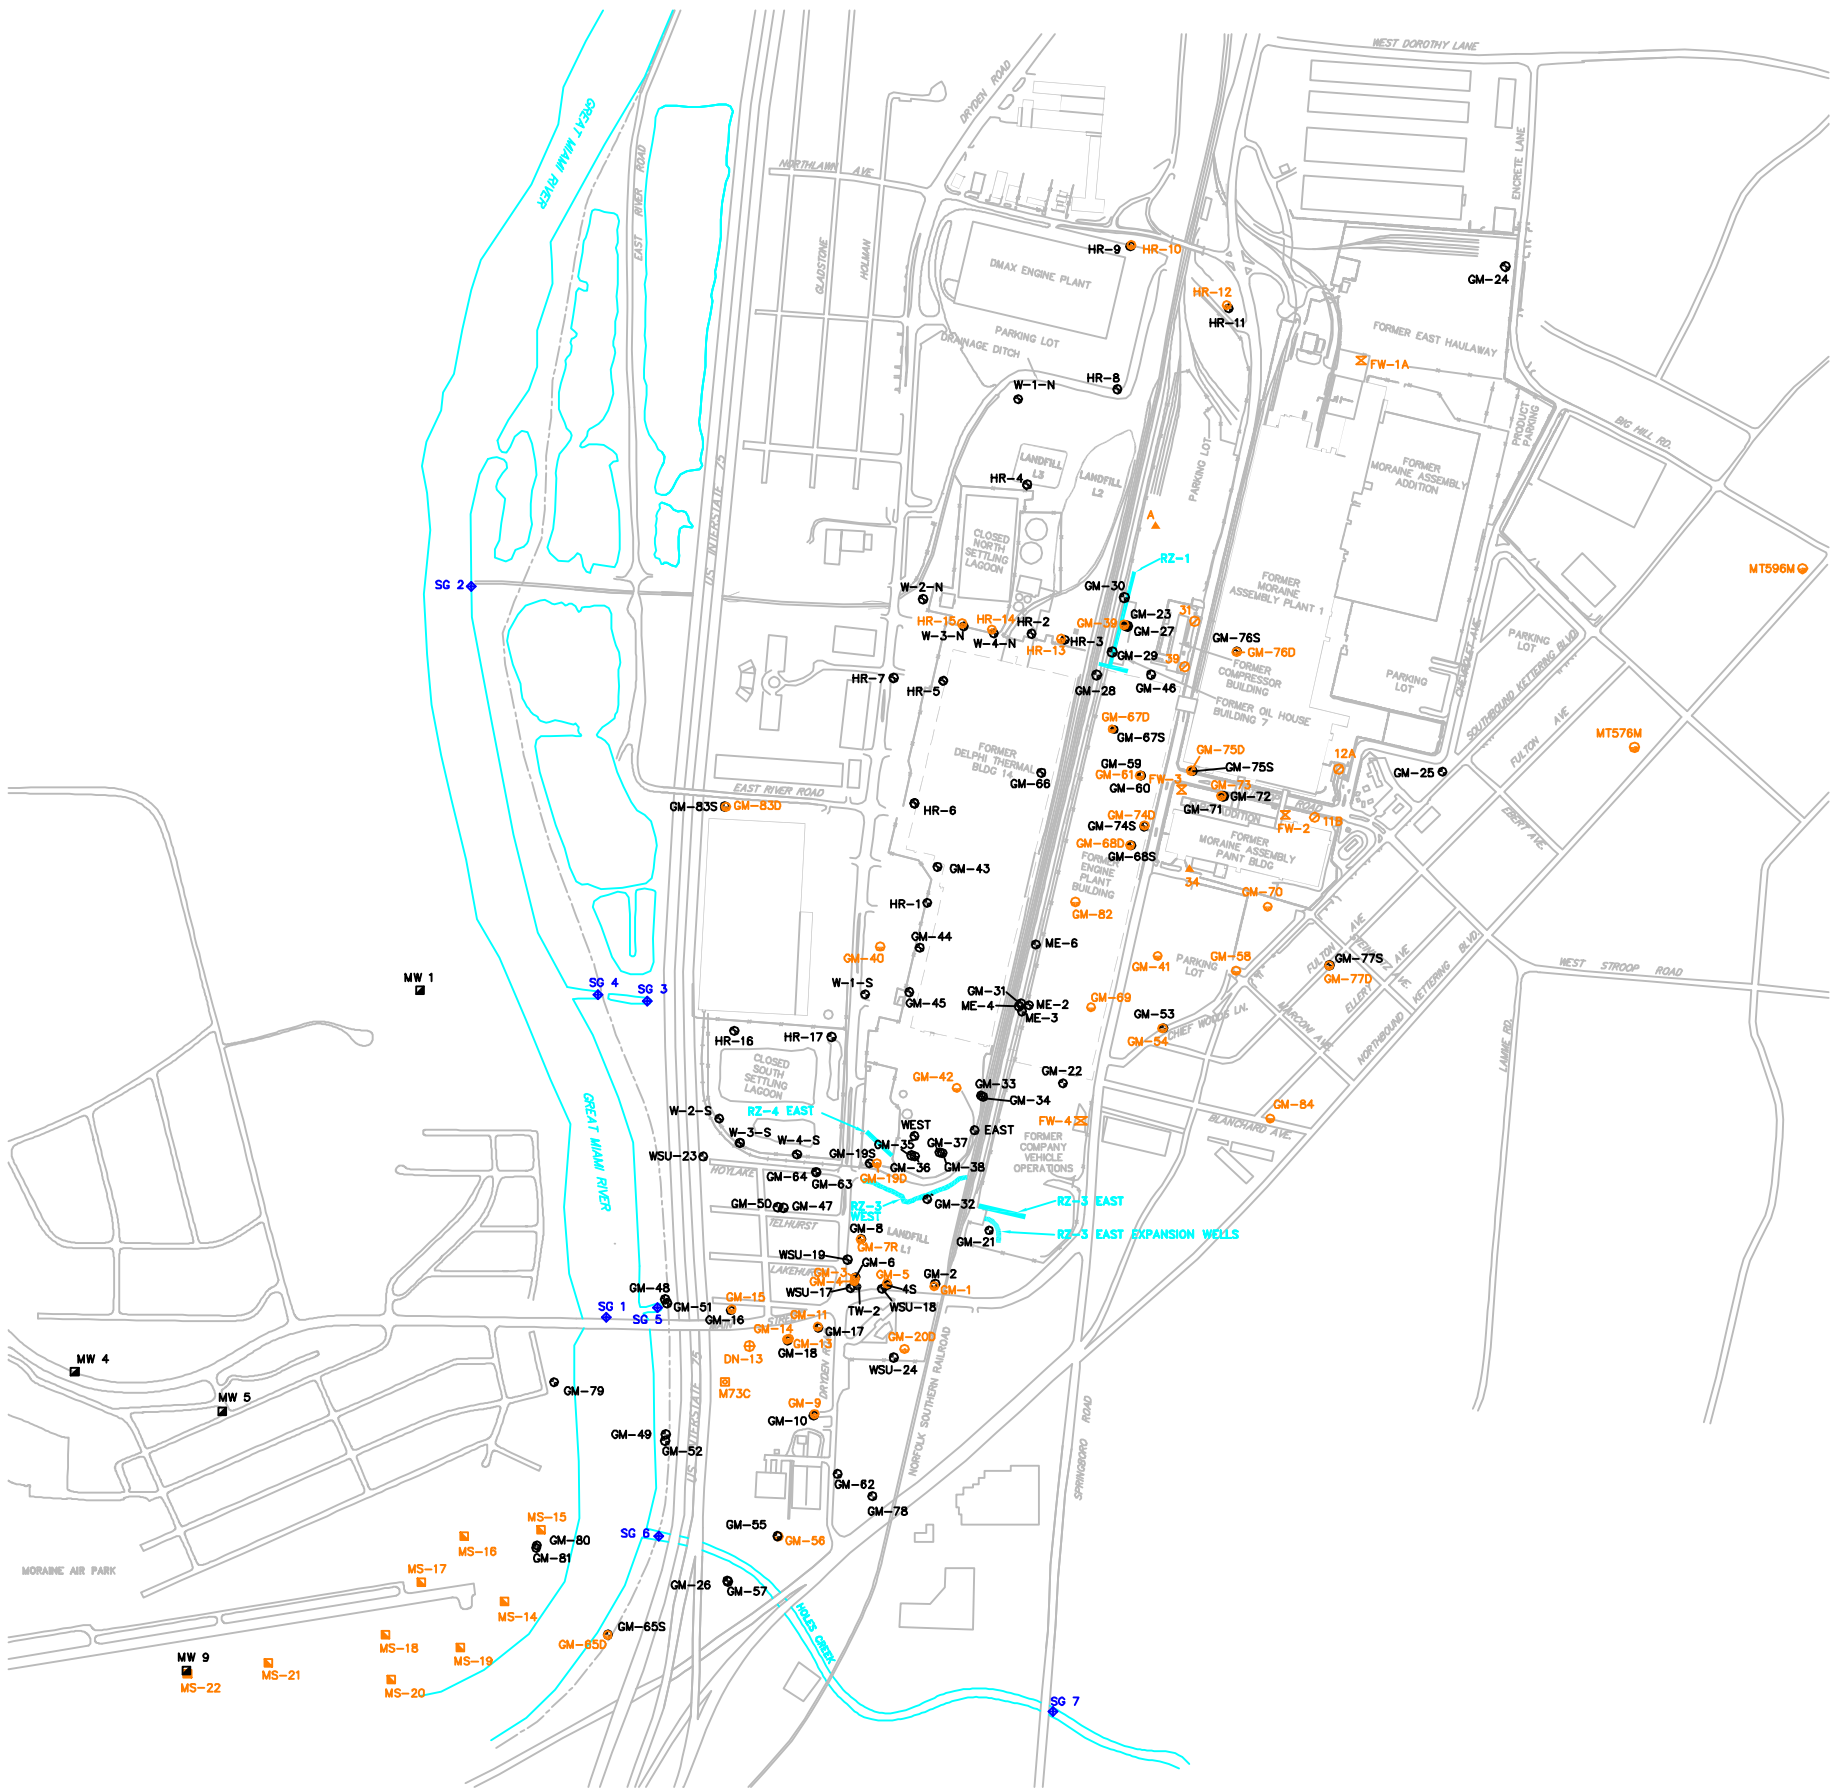


- LEGEND**
- MONITORING WELL (UPPER AQUIFER)
 - RECOVERY WELL (TW-2)
 - MONITORING WELL (LOWER AQUIFER)
 - PIEZOMETER
 - CARBON SOURCE INTRODUCTION WELLS, REACTIVE ZONES (RZ-1, RZ-3, AND RZ-4)
 - ⊗ FIRE WELL
 - ▲ PRODUCTION WELL CONVERTED TO MONITORING WELL (34, A)
 - INACTIVE PRODUCTION WELL (31, 39, 11B, 12A)
 - ⊕ MONTGOMERY COUNTY WELL (USED BY RACER TRUST FOR PUMP TO WASTE PROGRAM)
 - MONTGOMERY COUNTY WELL (INACTIVE MIAMI SHORES WELL FIELD - DAYTON PRIMARY PUBLIC SUPPLY BACKUP)
 - ◆ STREAM GAUGE
 - RIVER LEVEE
 - CITY OF MORAINE MONITORING WELL
 - FORMER BUILDING FOOTPRINT
 - SURFACE WATER FEATURE
- NOTES:**
1. ORANGE INDICATES LOWER AQUIFER WELLS.
 2. BLACK INDICATES UPPER AQUIFER WELLS.



RACER TRUST
MORAINE, OHIO
OH000294.2012

SITE-WIDE CORRECTIVE MEASURES



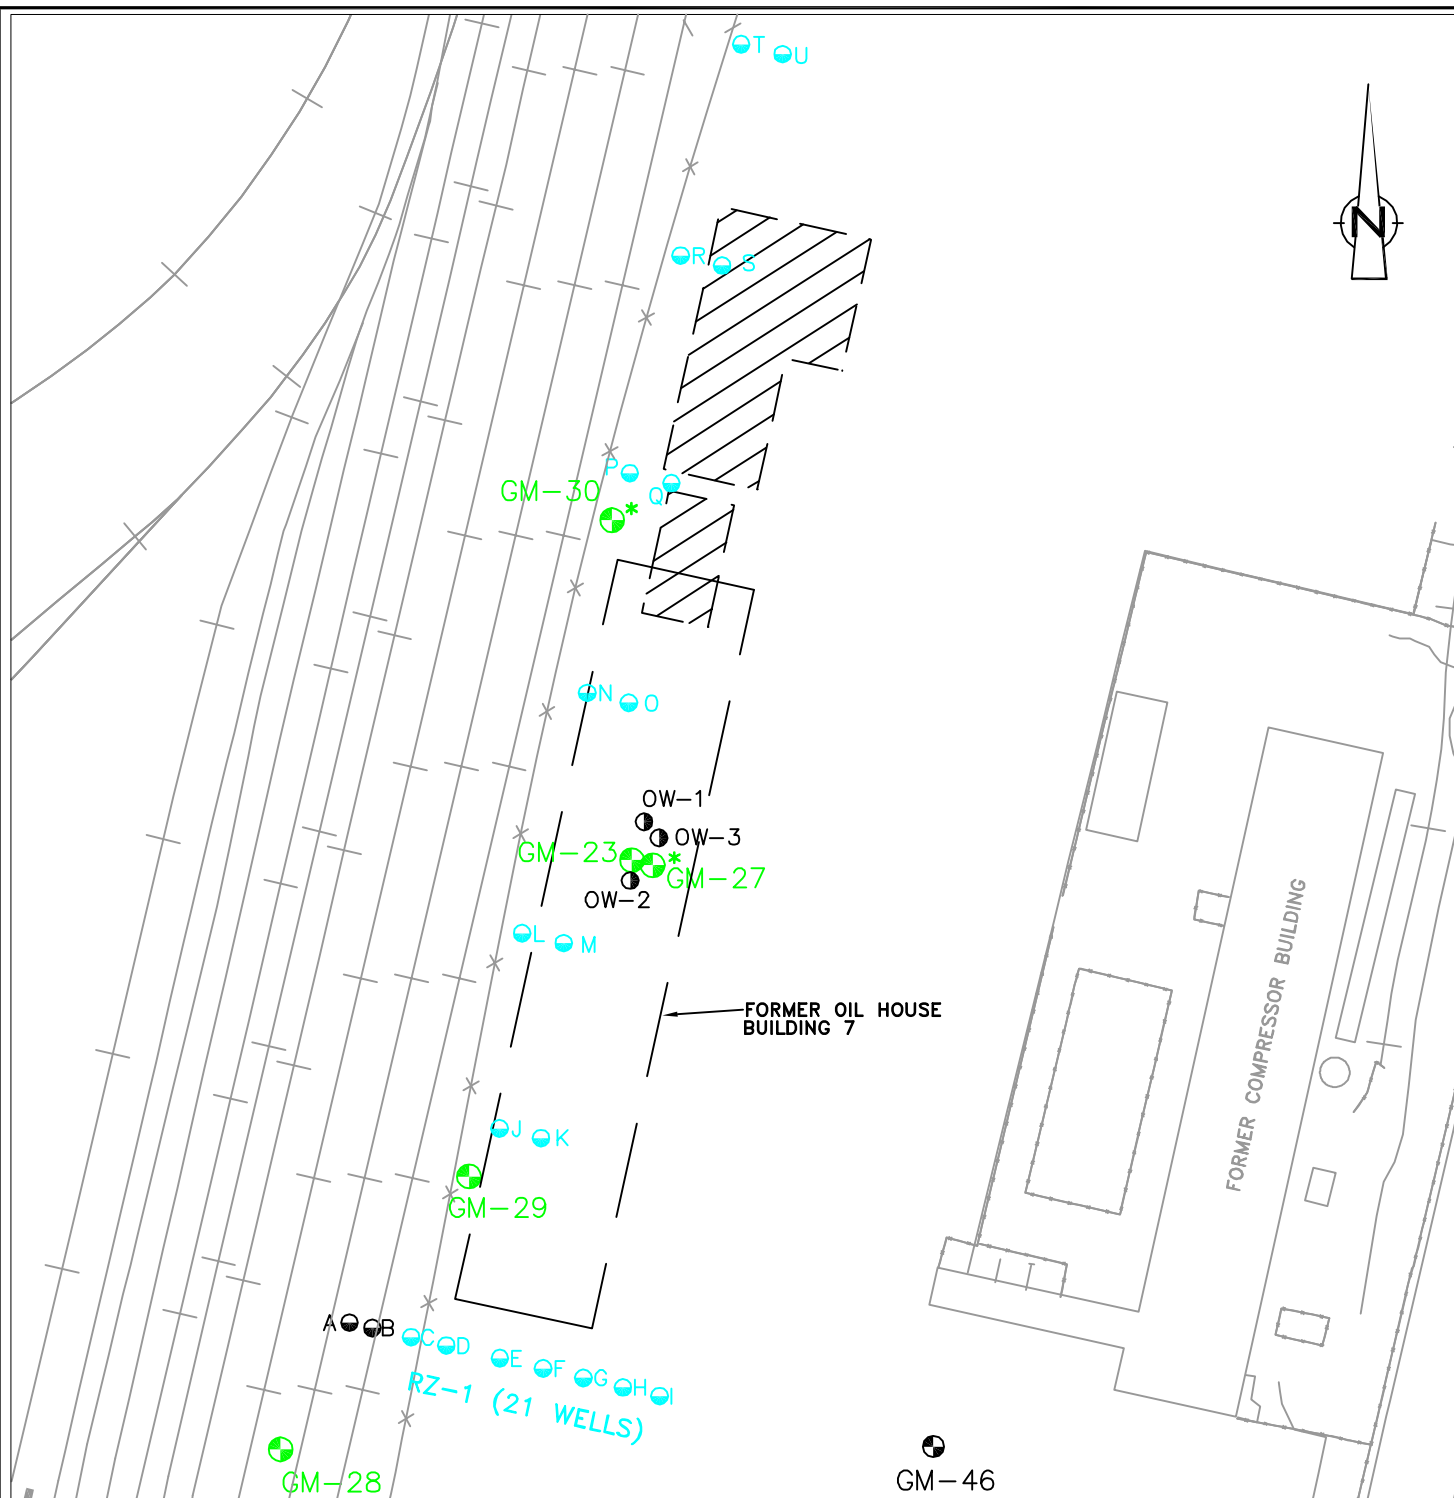

LEGEND

- MONITORING WELL USED FOR SITE-WIDE ON AN ANNUAL BASIS (UPPER AQUIFER)
- * MONITORING WELL USED FOR SITE-WIDE MONITORING ON A FIVE-YEAR BASIS (UPPER AQUIFER)
- CARBON SOURCE INTRODUCTION WELL
- INACTIVE CARBON SOURCE INTRODUCTION WELL
- OXIDATION WELLS (INACTIVE)
- MONITORING WELL (UPPER AQUIFER)
- APPROXIMATE LOCATION OF FORMER MORaine ENGINE TANK FARM


0 150 FT

RACER TRUST
MORaine, OHIO
OH000294.2012

REACTIVE ZONE #1



FIGURE
3

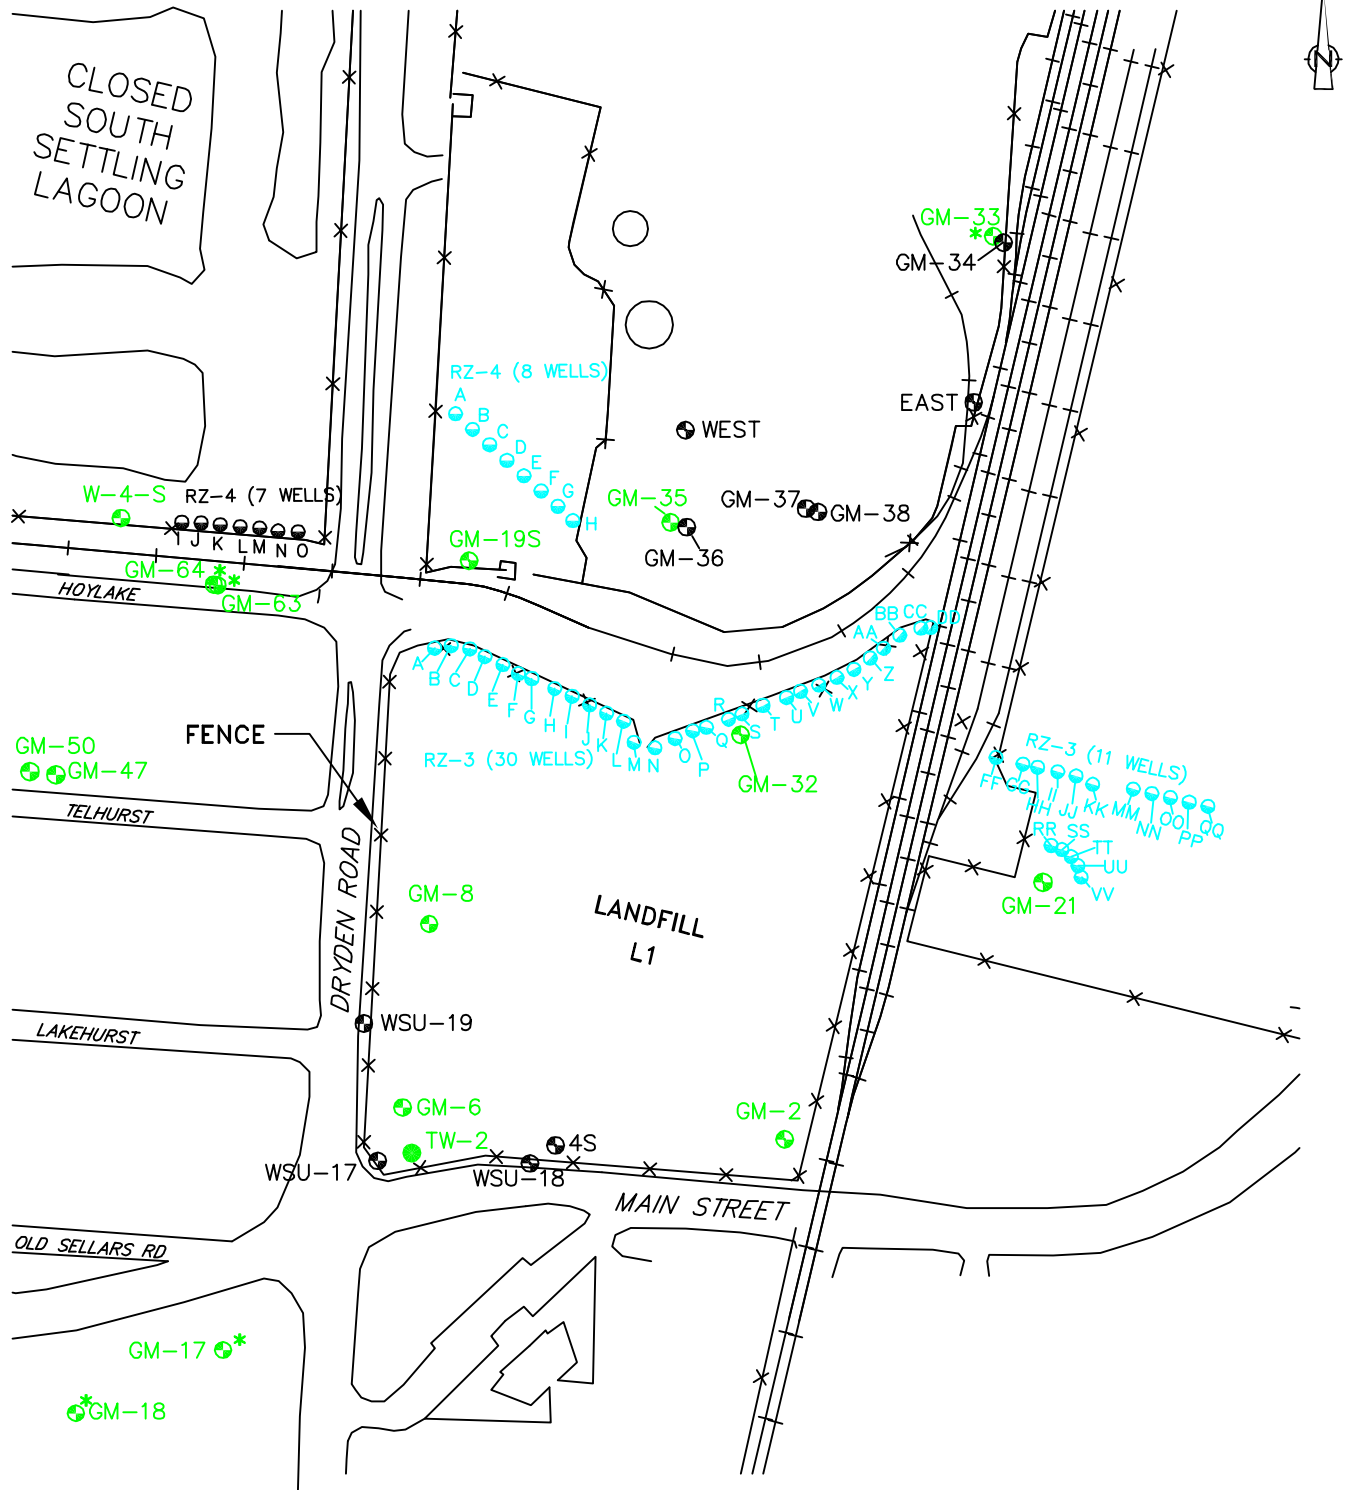

LEGEND

- MONITORING WELL USED FOR SITE-WIDE MONITORING ON AN ANNUAL BASIS (UPPER AQUIFER)
- * MONITORING WELL USED FOR SITE-WIDE MONITORING ON A FIVE-YEAR BASIS (UPPER AQUIFER)
- CARBON SOURCE INTRODUCTION WELLS
- INACTIVE CARBON SOURCE INTRODUCTION WELLS
- RECOVERY WELL (USED FOR SITE-WIDE MONITORING)
- MONITORING WELL (UPPER AQUIFER)

NOTE: INTRODUCTION WELL RZ-3LL WAS NOT INSTALLED DUE TO PRESENCE OF UNDERGROUND UTILITIES.


0 300 FT

RACER TRUST
 MORaine, OHIO
 OH000294.2012


REACTIVE ZONES #3 AND #4




FIGURE
 4

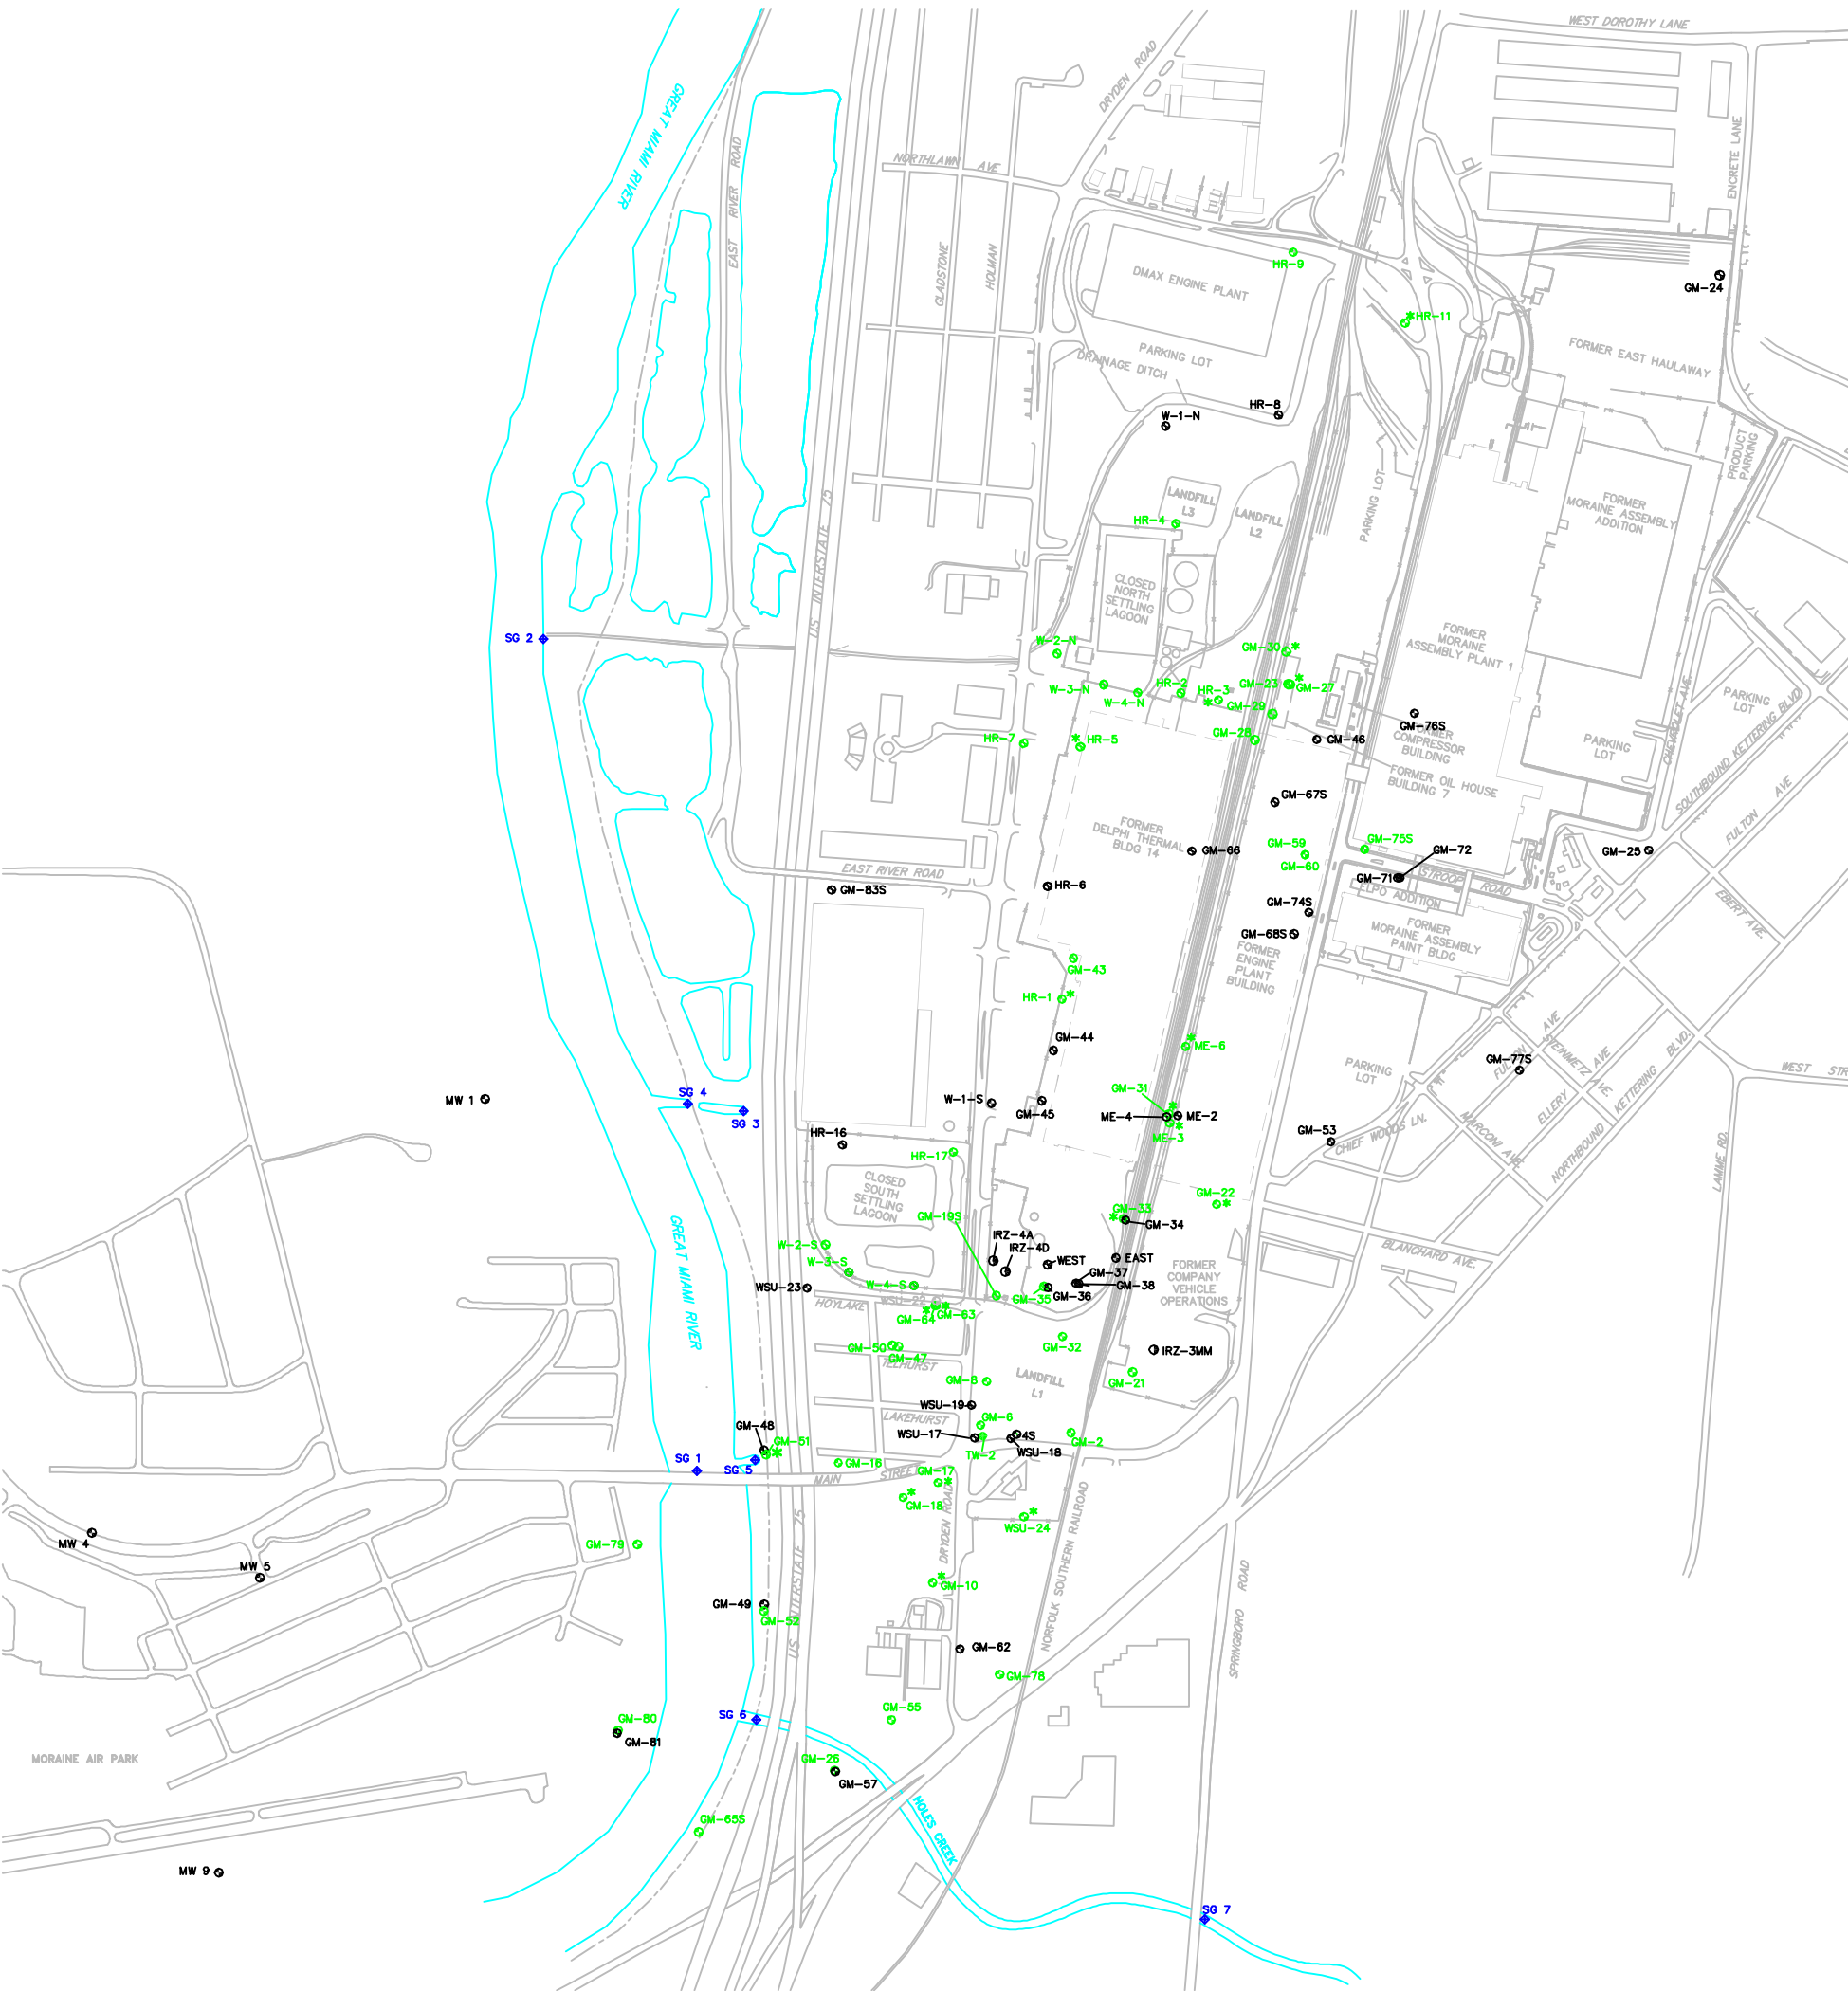


- LEGEND**
- MONITORING WELL (UPPER AQUIFER)
 - RECOVERY WELL (USED FOR SITE-WIDE MONITORING)
 - ◆ STREAM GAUGE
 - ⊙ CARBON INTRODUCTION WELL
 - ⊙ MONITORING WELL USED FOR SITE-WIDE MONITORING ON AN ANNUAL BASIS (UPPER AQUIFER)
 - ⊙* MONITORING WELL USED FOR SITE-WIDE MONITORING ON A FIVE-YEAR BASIS (UPPER AQUIFER)
 - FORMER BUILDING FOOTPRINT
 - RIVER LEVEE
 - SURFACE WATER FEATURE



RACER TRUST MORaine, OHIO OH000294.2012	
UPPER AQUIFER MONITORING WELLS FOR SITE-WIDE GROUNDWATER MONITORING	
	FIGURE 5

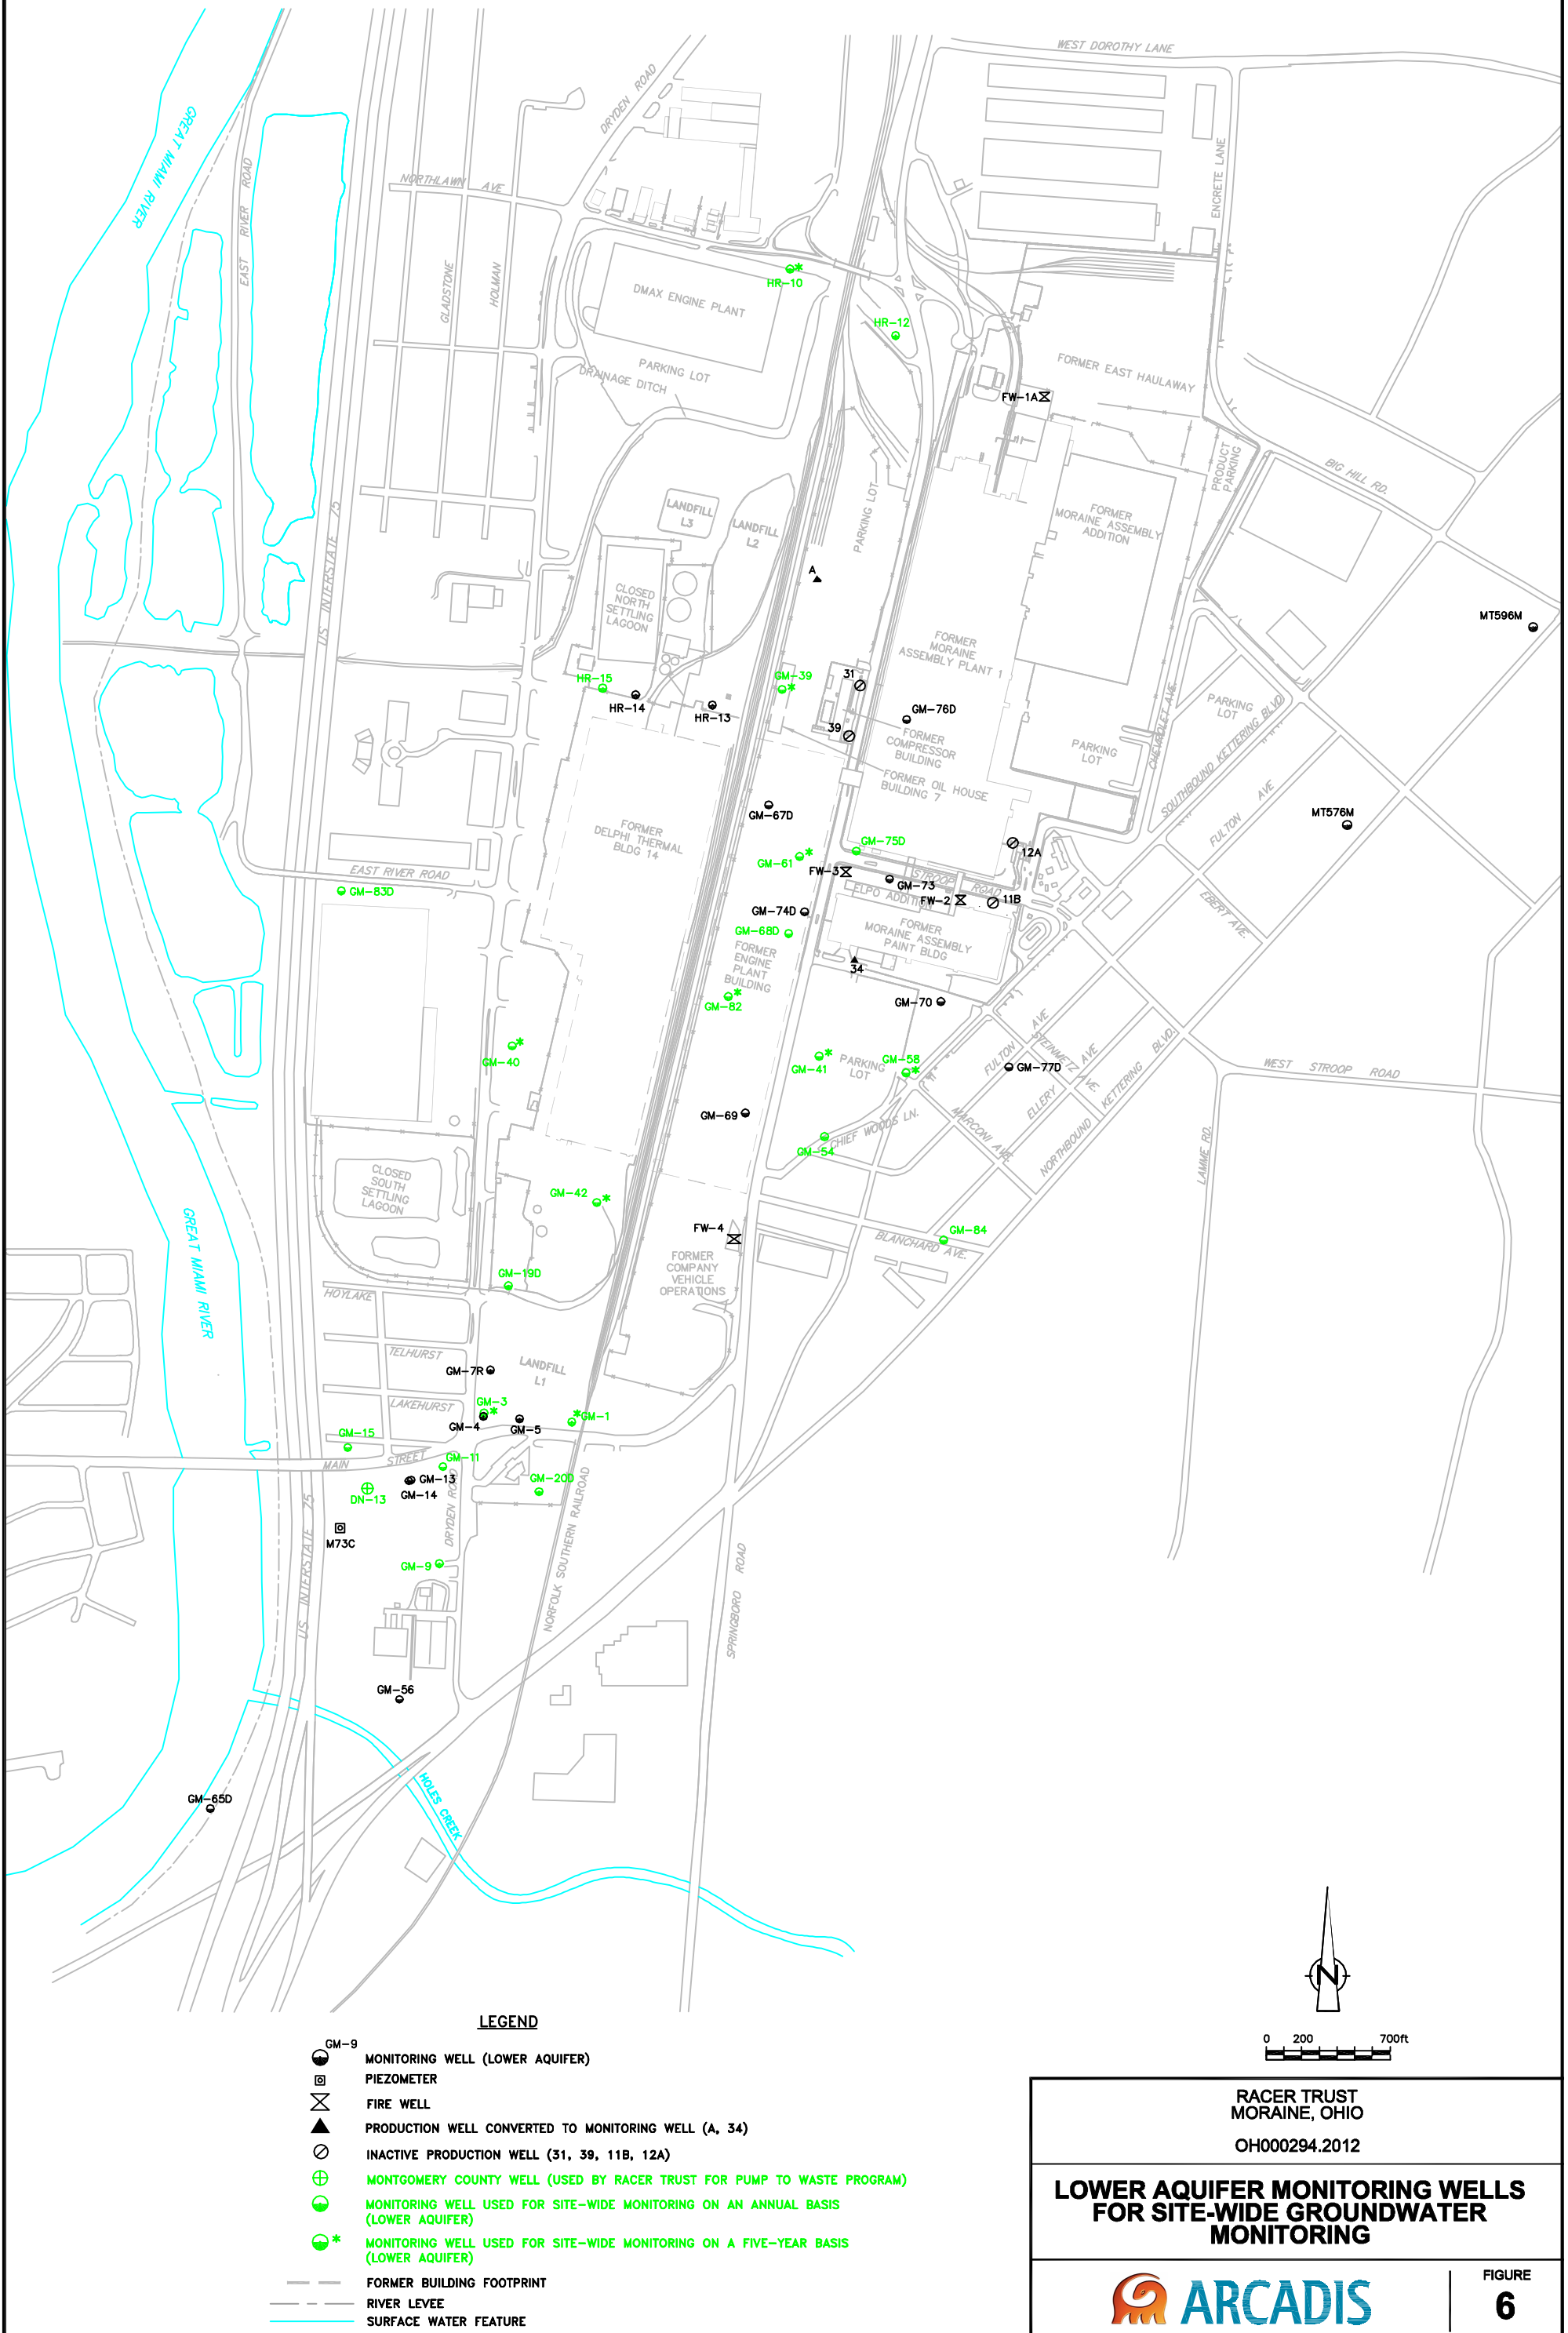

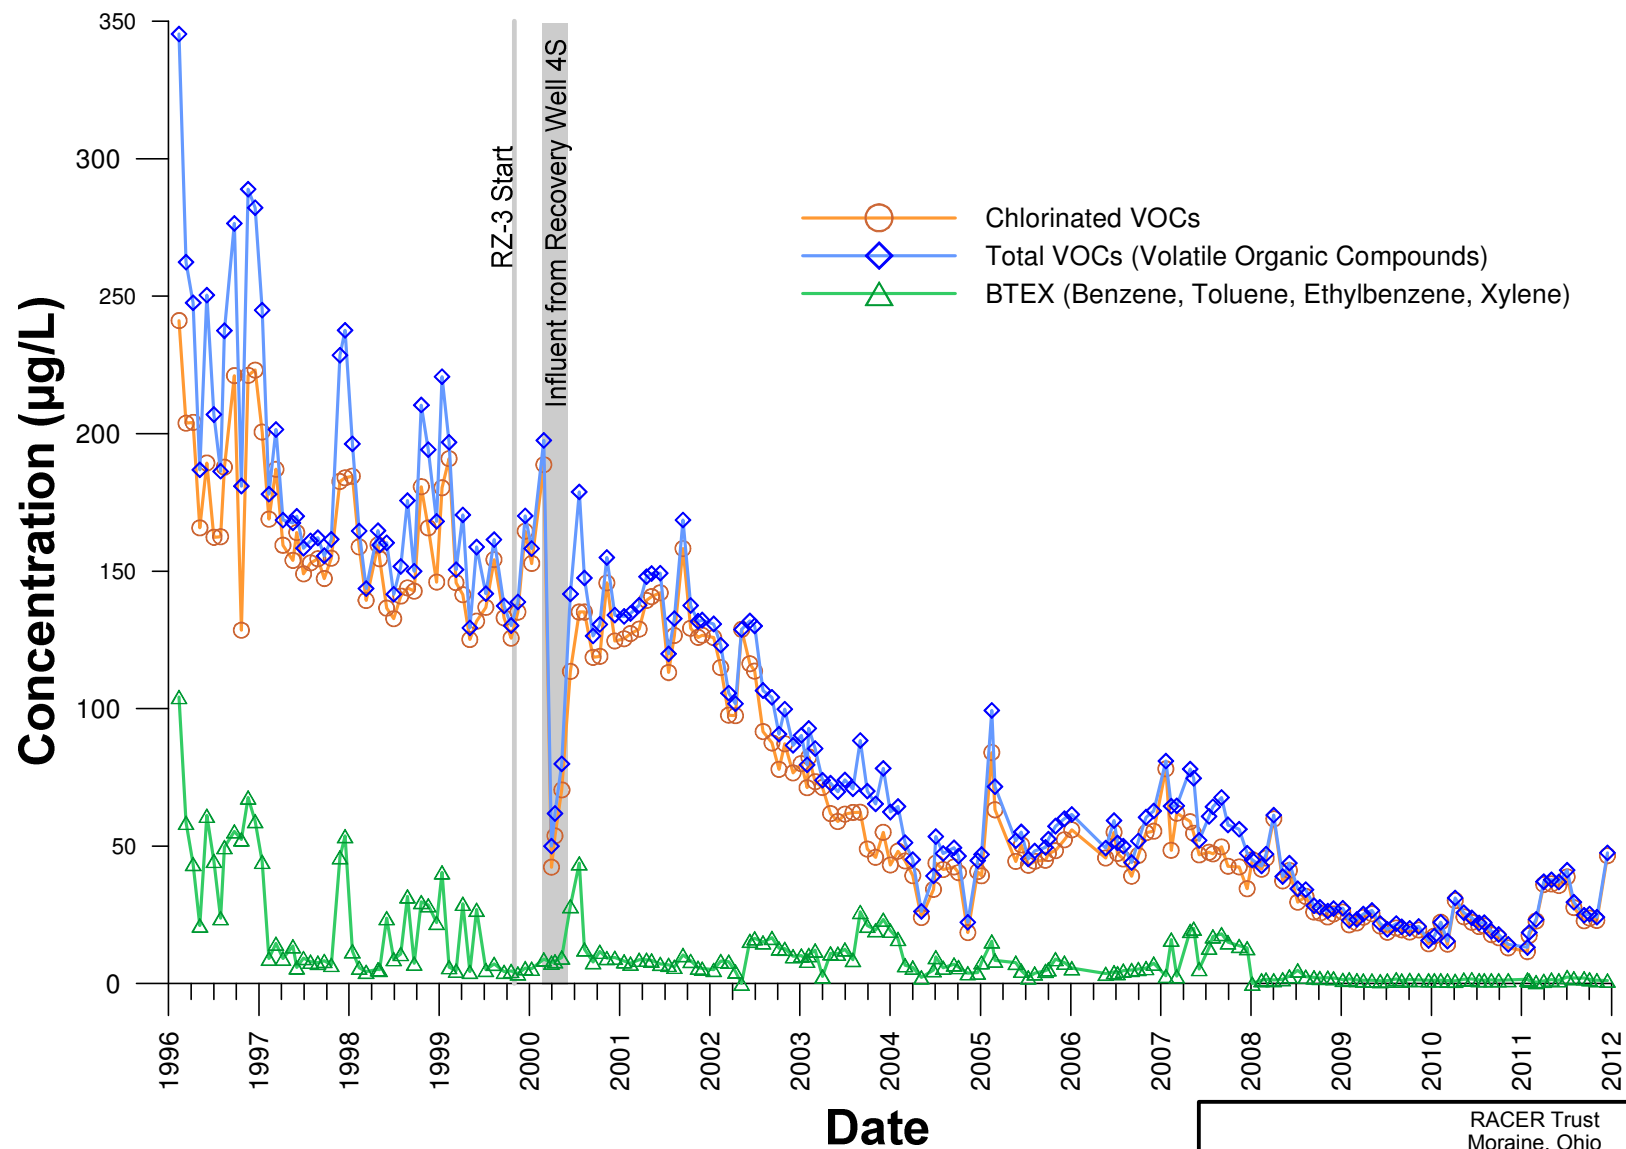


RACER Trust
Moraine, Ohio
OH000294.2012

RECOVERY WELL TW-2 INFLUENT VOCs
SINCE GROUNDWATER RECOVERY AND
TREATMENT STARTUP




FIGURE

7

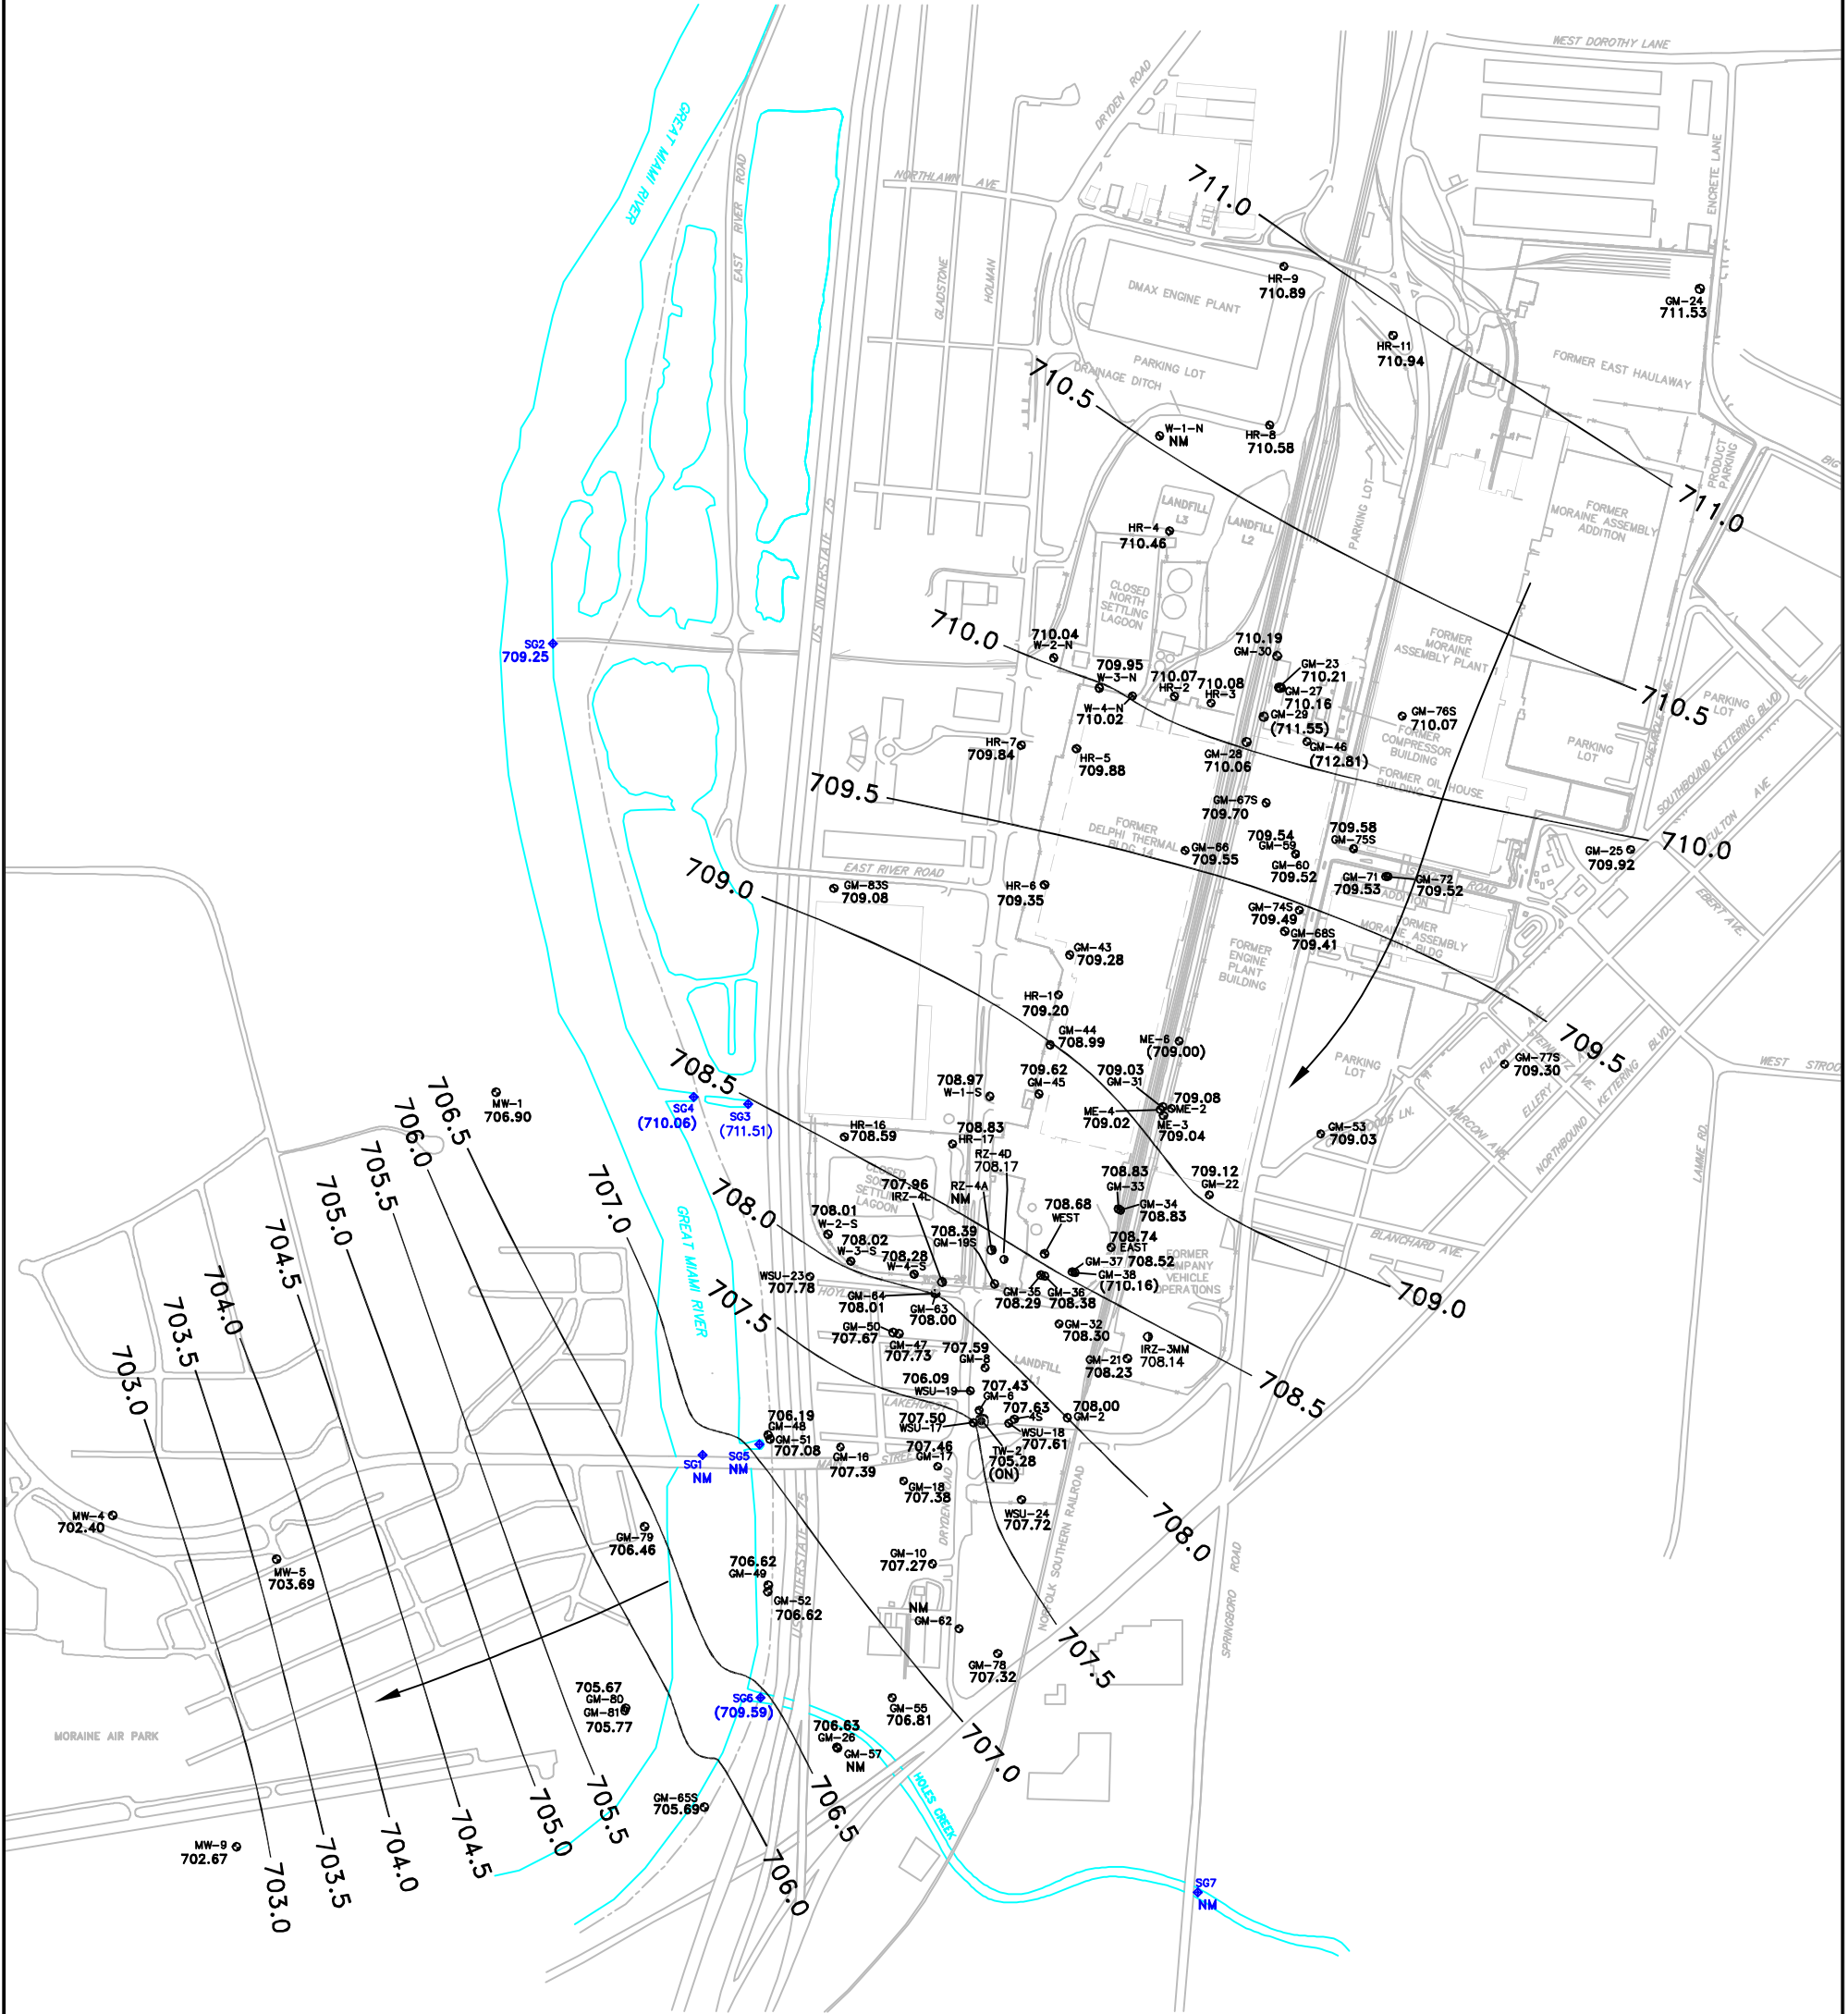


- LEGEND**
- MONITORING WELL (UPPER AQUIFER)
 - ⊕ RECOVERY WELL (TW-2)
 - ◆ 707.94 STREAM GAUGE AND STREAM GAUGE MEASUREMENT; NOT USED FOR CONTOURING
 - ⊙ CARBON INTRODUCTION WELL
 - RIVER LEVEE
 - 702.67 GROUNDWATER ELEVATION (FEET MSL)
 - 706.0 — GROUNDWATER CONTOUR (FEET MSL) (DASHED WHERE INFERRED)
 - () NOT USED FOR CONTOURING
 - NM NOT MEASURED
 - DRY LOW STREAM LEVEL, NO MEASURABLE WATER
 - ➔ FLOW DIRECTION
 - ON/OFF INDICATES WHETHER RECOVERY WELL IS IN OPERATION
 - CONE OF DEPRESSION AT RECOVERY WELL TW-2 (ESTIMATED INDIVIDUAL CONTOURS NOT SHOWN)
 - FORMER BUILDING FOOTPRINT
 - SURFACE WATER FEATURE
 - CONTOUR INTERVAL = 0.5 FOOT



RACER TRUST
MORaine, OHIO
OH000294.2012

**POTENTIOMETRIC SURFACE
(UPPER AQUIFER)
SEPTEMBER 27-28, 2011**



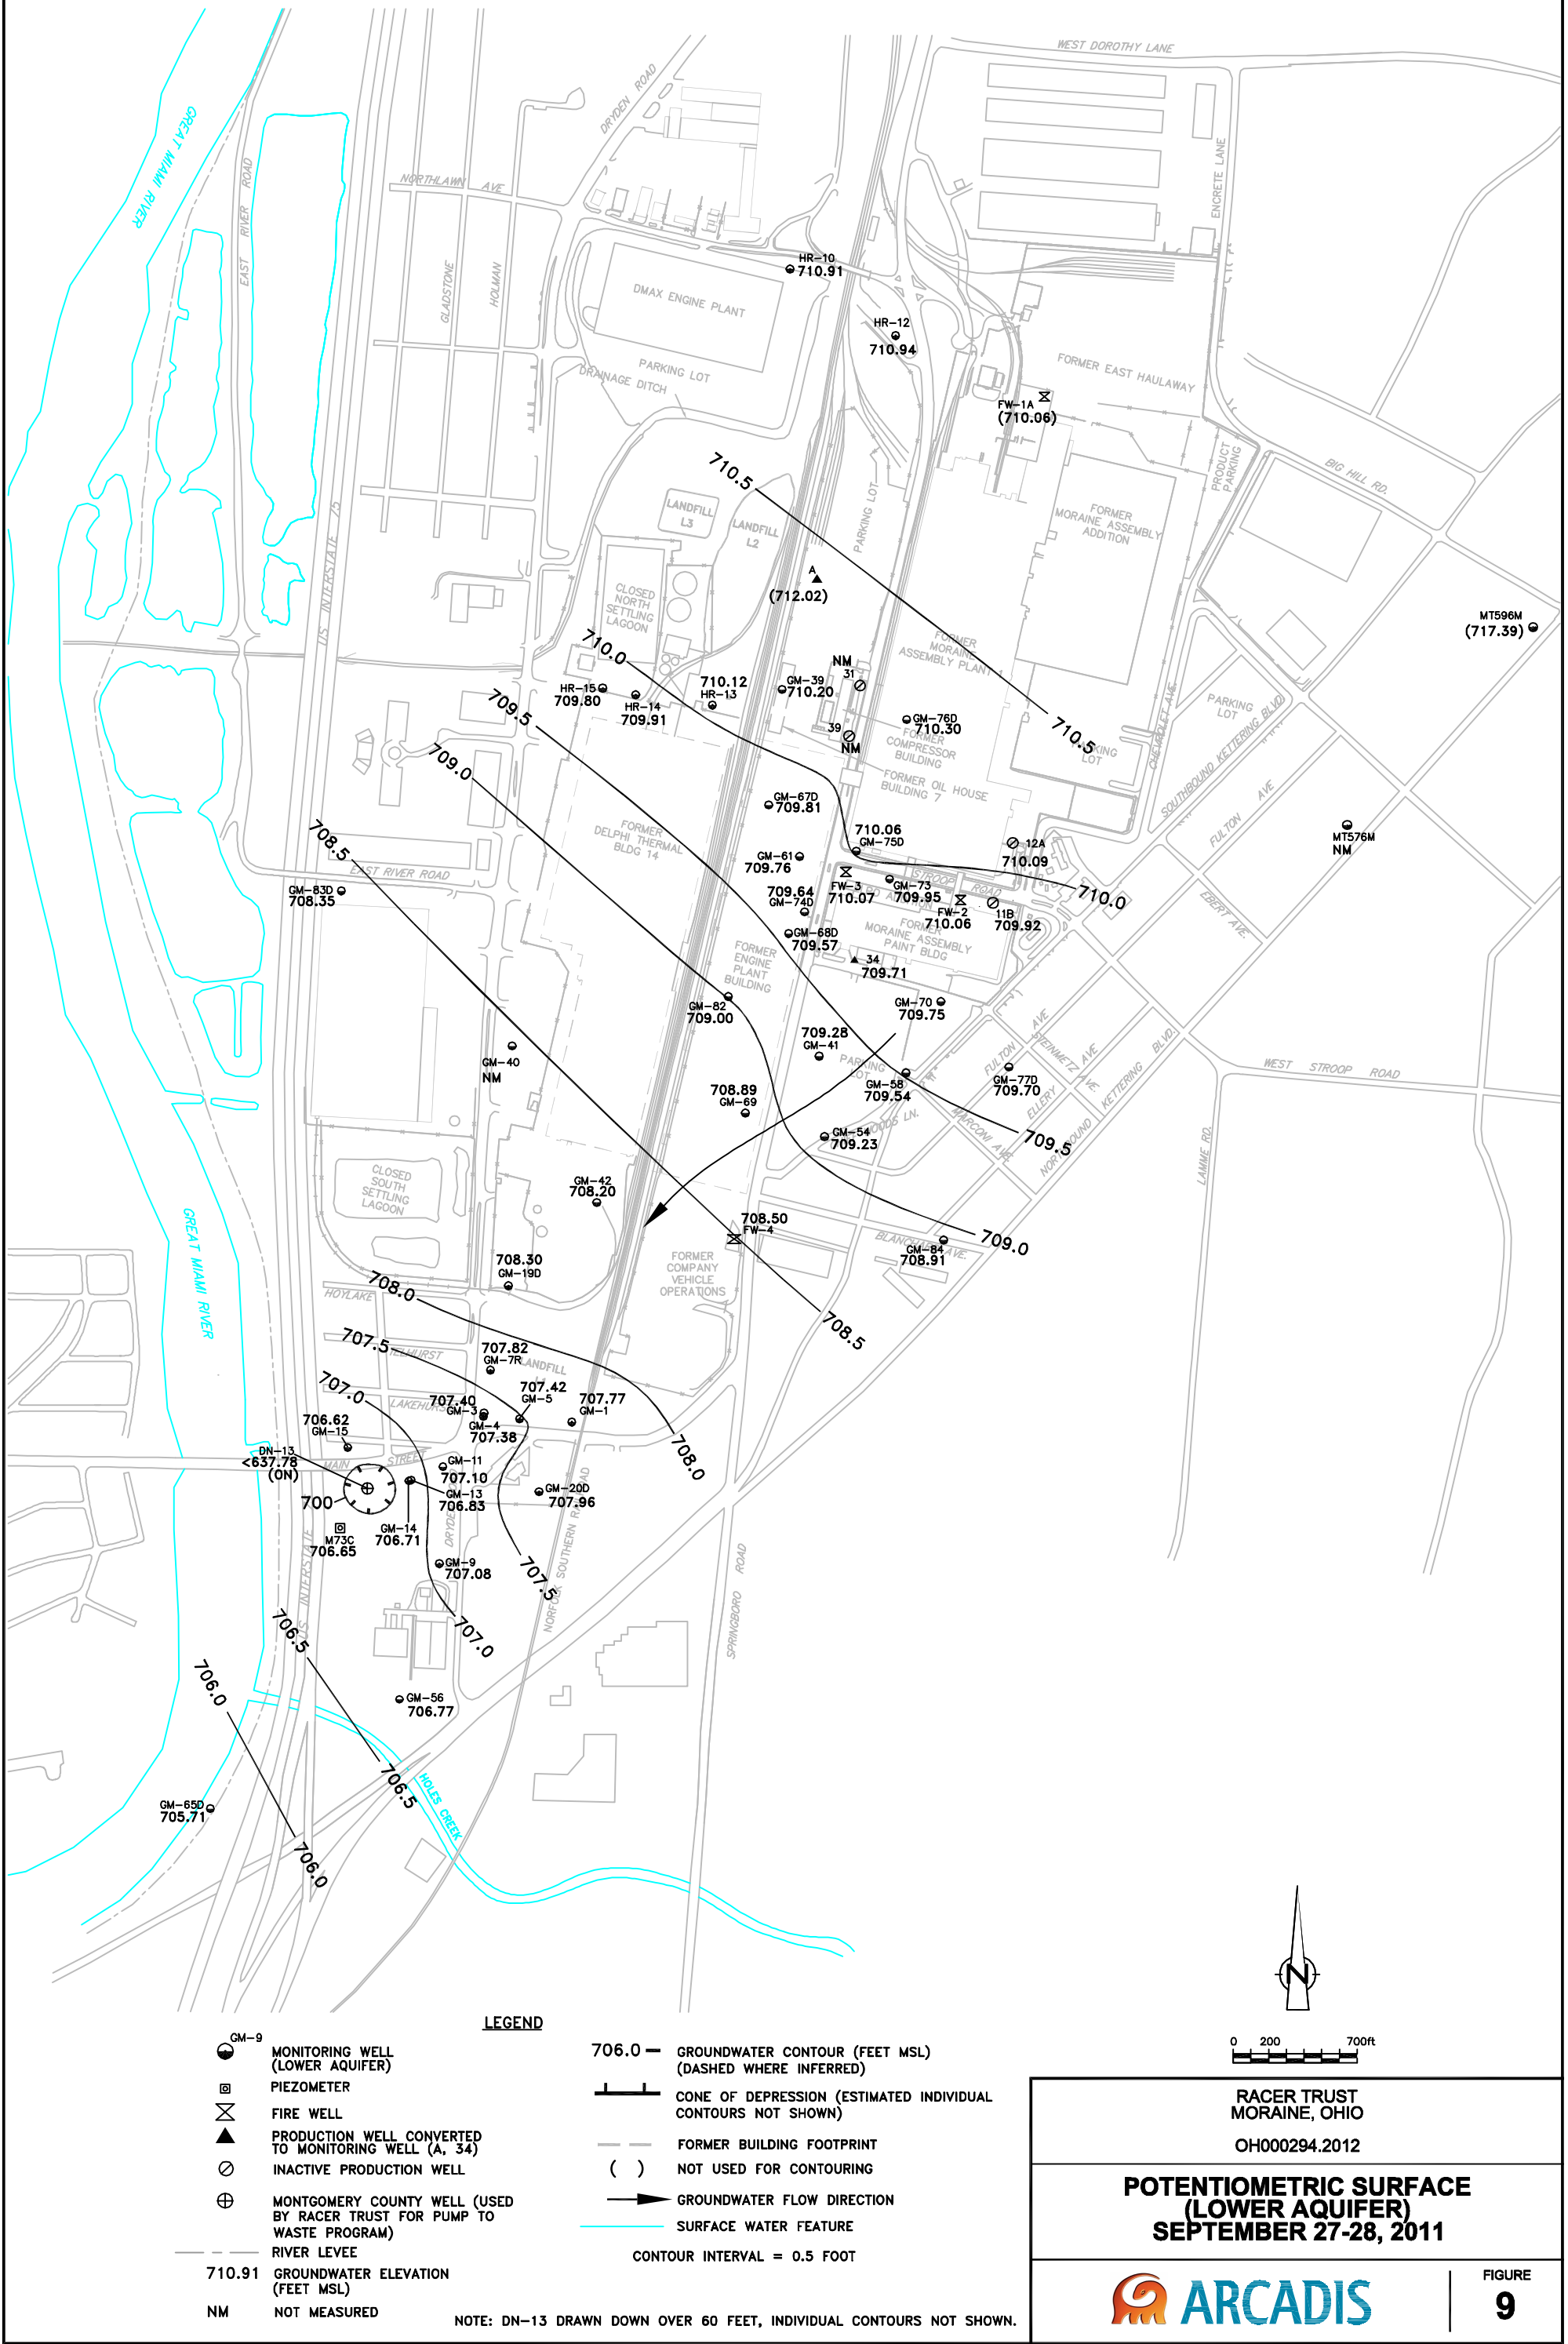

[illegible]

GM-39: LA (65-625) us/l	12/10/2003 us/l	8/20/2004 us/l	10/24/2005 us/l	9/27/2006 us/l	9/28/2007 us/l	10/1/2008 us/l	GM-76D: LA-BT (659-669) us/l	9/23/2007 us/l			
1,1,1-Trichloroethane	(N)	(N)	(N)	(N)	(N)	(N)	VGAs				
1,1-Dichloroethane	(N)	(U)	(N)	(N)	(N)	(N)	1,1,1-Trichloroethane	(N)	(D)	(U)	(1.0)
1,1-Dichloroethane	(N)	(U)	(N)	(N)	(N)	(N)	1,1-Dichloroethane	(N)	(D)	(U)	0.29 / 0.30 J
1,2-Dichloroethane	(N)	(U)	(N)	(N)	(N)	(N)	1,2-Dichloroethane	(N)	(D)	(U)	1.0
2,2,4,4-Tetrachloroethane	(N)	(U)	(N)	(N)	(N)	(N)	Benzene	(N)	(D)	(U)	1.0
2,2,4,4-Tetrachloroethane	(N)	(U)	(N)	(N)	(N)	(N)	1,1,2,2-Tetrachloroethane	(N)	(D)	(U)	1.0
Tetrachloroethane	(N)	(U)	(N)	(N)	(N)	(N)	Ethylbenzene	(N)	(D)	(U)	1.0
Toluene	0.18 U	(N)	(N)	(N)	(N)	(N)	Trichloroethane	(N)	(D)	(U)	0.65 / 0.63 J
1,1,2,2-Tetrachloroethane	(N)	(U)	(N)	(N)	(N)	(N)	Toluene	(N)	(D)	(U)	1.0
Trichloroethane	(N)	(U)	(N)	(N)	(N)	(N)	trans-1,2-Dichloroethane	(N)	(D)	(U)	1.0
Trichloroethane	1.6	(N)	(N)	(N)	(N)	(N)	Trichloroethane	(N)	(D)	(U)	2.5/2.0
Xylene (total)	(N)	(U)	(N)	(N)	(N)	(N)	Very chlorides	(N)	(D)	(U)	1.0

[illegible]

Xylene (total)	ND (1.0)	U (1)	U	Xylene (total)	ND (1.0)	U (1)	U	Vinyl chloride (Xylene total)	ND (1.4) ND (2.9)	U (1.7) U (3.3)
GM-67D: LA-BT (653-663)	5/3/2007									
1,1,1-Trichloroethane		0.59	J							
1,1-Dichloroethane		3.0	J							
1,1-Dichloroethene		0	J							
Benzene		ND (1.7)	U							
o,m-1,2-Dichlorobenzene		23	J							
Ethylbenzene		ND (1.7)	U							
Tetrachloroethene		64	J							
Toluene		ND (1.7)	U							
trans-1,2-Dichloroethene		4.5	J							
Trichloroethene		48.3	J							
Vinyl chloride		ND (1.7)	U							
Xylene (total)		ND (1.0)	U							
GM-75D: LA (643-653)	9/26/2007									
1,1,1-Trichloroethane		ND (1.50)	U							
1,1-Dichloroethane		ND (50)	U							
1,1-Dichloroethene		ND (50)	U							
o,m-1,2-Dichlorobenzene		ND (50)	U							
Ethylbenzene		ND (50)	U							
Tetrachloroethene		ND (50)	U							
Toluene		ND (50)	U							
Vinyl chloride		ND (50)	U							
Xylene (total)		ND (1.50)	U							

DM-41: LA (617-627)	12/10/2003	9/21/2004	10/24/2005	9/18/2006	5/20/2007
1,1,1-Trichloroethane	ND (11)	ND (6.2)	ND (10)	U/ND (10)	U/ND (4.3)
1,1-Dichloroethane	ND (11)	U/ND (6.2)	ND (10)	U/ND (10)	U/ND (4.3)
1,2-Dichloroethane	ND (11)	ND (6.2)	ND (10)	U/ND (10)	U/ND (4.3)
Benzene	ND (11)	ND (6.2)	ND (10)	U/ND (10)	U/ND (4.3)
1,1,2,2-Tetrachloroethane	ND (11)	ND (6.2)	ND (10)	U/ND (10)	U/ND (4.3)
Ethylbenzene	ND (11)	U/ND (6.2)	ND (10)	U/ND (10)	U/ND (4.3)
Triethylbenzene	ND (11)	U/ND (6.2)	ND (10)	U/ND (10)	U/ND (4.3)
Toluene	ND (11)	U/ND (6.2)	ND (10)	U/ND (10)	U/ND (4.3)
XYLENES (total)	ND (11)	U/ND (6.2)	ND (10)	U/ND (10)	U/ND (4.3)

[illegible][illegible]

|--|--|

Component	GC-70	GC-06	GC-41	GC-770
1,1,1-Trichloroethane	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)
1,2-Dichloroethane	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)
1,1-Dichloroethene	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)
Benzene	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)
trans-1,2-Dichloroethene	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)
Styrene	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)
Tetrachloroethene	ND (0.4)	45	18	ND (0.0)
Toluene	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)
trans-1,2-Dichloroethene	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)
Trichloroethene	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)
1,2-Dichloroethane	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)
Xylene (Total)	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)
Xylene (Total)	ND (0.4)	ND (0.0)	ND (0.0)	ND (0.0)

[illegible]


	9/28/1999	10/2/2000	11/14/2000	10/1/2002	10/2/2003	9/21/2004	10/25/2005	9/20/2006
1,1-Trichloroethane	ND (1.0)	1.1	2.2	0.80 U	1.3	1.2	1.2	0.95 J/0.0
1,1-Dichloroethane	ND (1.0)	ND (0.00)	U	0.29 J	0.48 U	ND (1.0)	ND (1.0)	ND (1.0)
1,1-Dichloroethene	ND (1.0)	ND (0.00)	U	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)
Trans-1,2-Dichloroethane	ND (1.0)	ND (1.0)	U	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)
Trichloroethene	76.1/76.0							
Vinyl chloride	ND (1.0)							
Xylene (total)	ND (1.0)							

	9/28/1999	10/2/2000	11/14/2000	10/1/2002	10/2/2003	9/21/2004	10/25/2005	9/20/2006
1,1-Trichloroethane	ND (1.0)	1.1	2.2	0.80 U	1.3	1.2	1.2	0.95 J/0.0
1,1-Dichloroethane	ND (1.0)	ND (0.0)	U	0.29 J	0.48 U	ND (1.0)	ND (1.0)	ND (1.0)
1,1-Dichloroethene	ND (1.0)	ND (0.0)	U	ND (1.0)	ND (1.1)	ND (1.0)	ND (1.0)	ND (1.0)
Toluene	ND (1.0)	U	U	U	U	U	U	U
trans-1,2-Dichloroethane	ND (1.0)	U	U	U	U	U	U	U
Trichloroethene	76.1/76.0	U	U	U	U	U	U	U
Vinyl chloride	ND (1.0)	U	U	U	U	U	U	U
Xylene (total)	ND (1.0)	U	U	U	U	U	U	U


[illegible][illegible][illegible][illegible]

0	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	U
1	U	ND (1.0)	ND (1.0)	ND (1.0)	U
6.6	U	7.9	6.9	6.3	
0	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	U
0	U	0.30	ND (1.0)	U	0.40
0	ND (1.0)	ND (1.0)	ND (1.0)	ND (1.0)	U
40	U	0.55	0.44	U	0.38
4.7	6.5	5.9	4.8		
1.5	1.7	1.3	1.3		
U	ND (2.0)	U	ND (2.0)	ND (2.0)	U


25/2006	9/18/2007	9/24/2008	9/22/2010	9/28/2011
ug/L	ug/L	ug/L	ug/L	ug/L
2.44	1.2	5.7	11.900 (1.2)	99.0 (1.0)

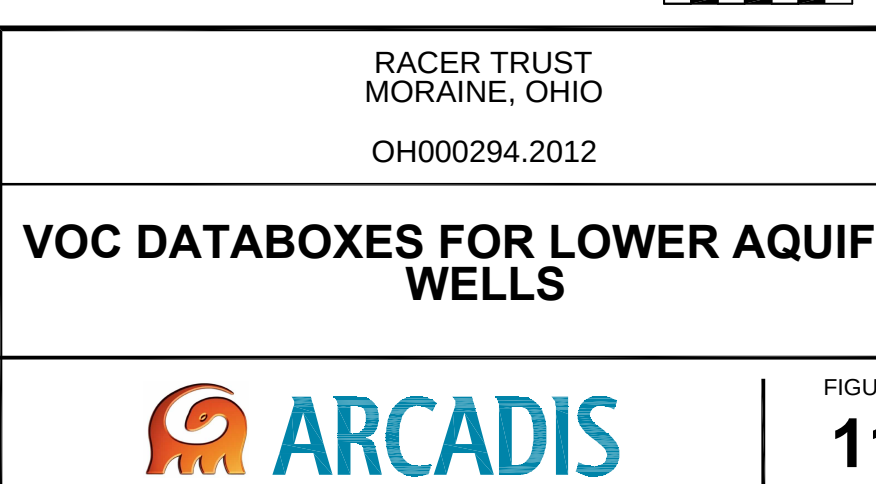


GM-23 (Source Well)

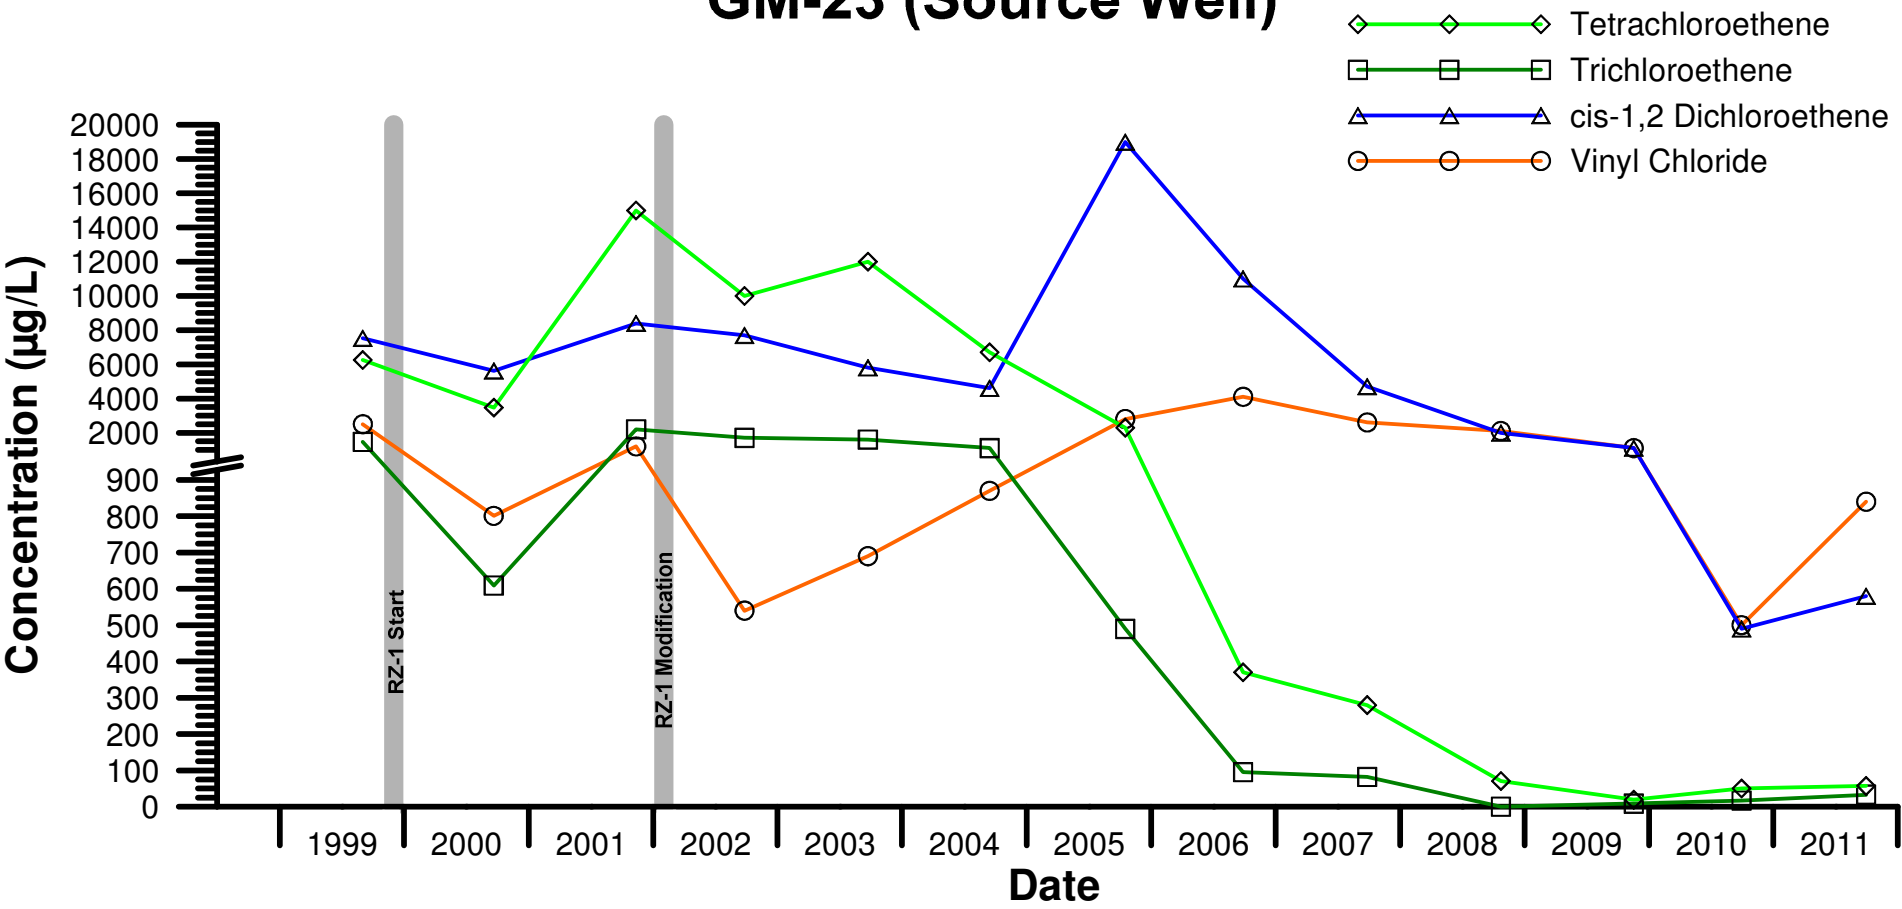


GM-29

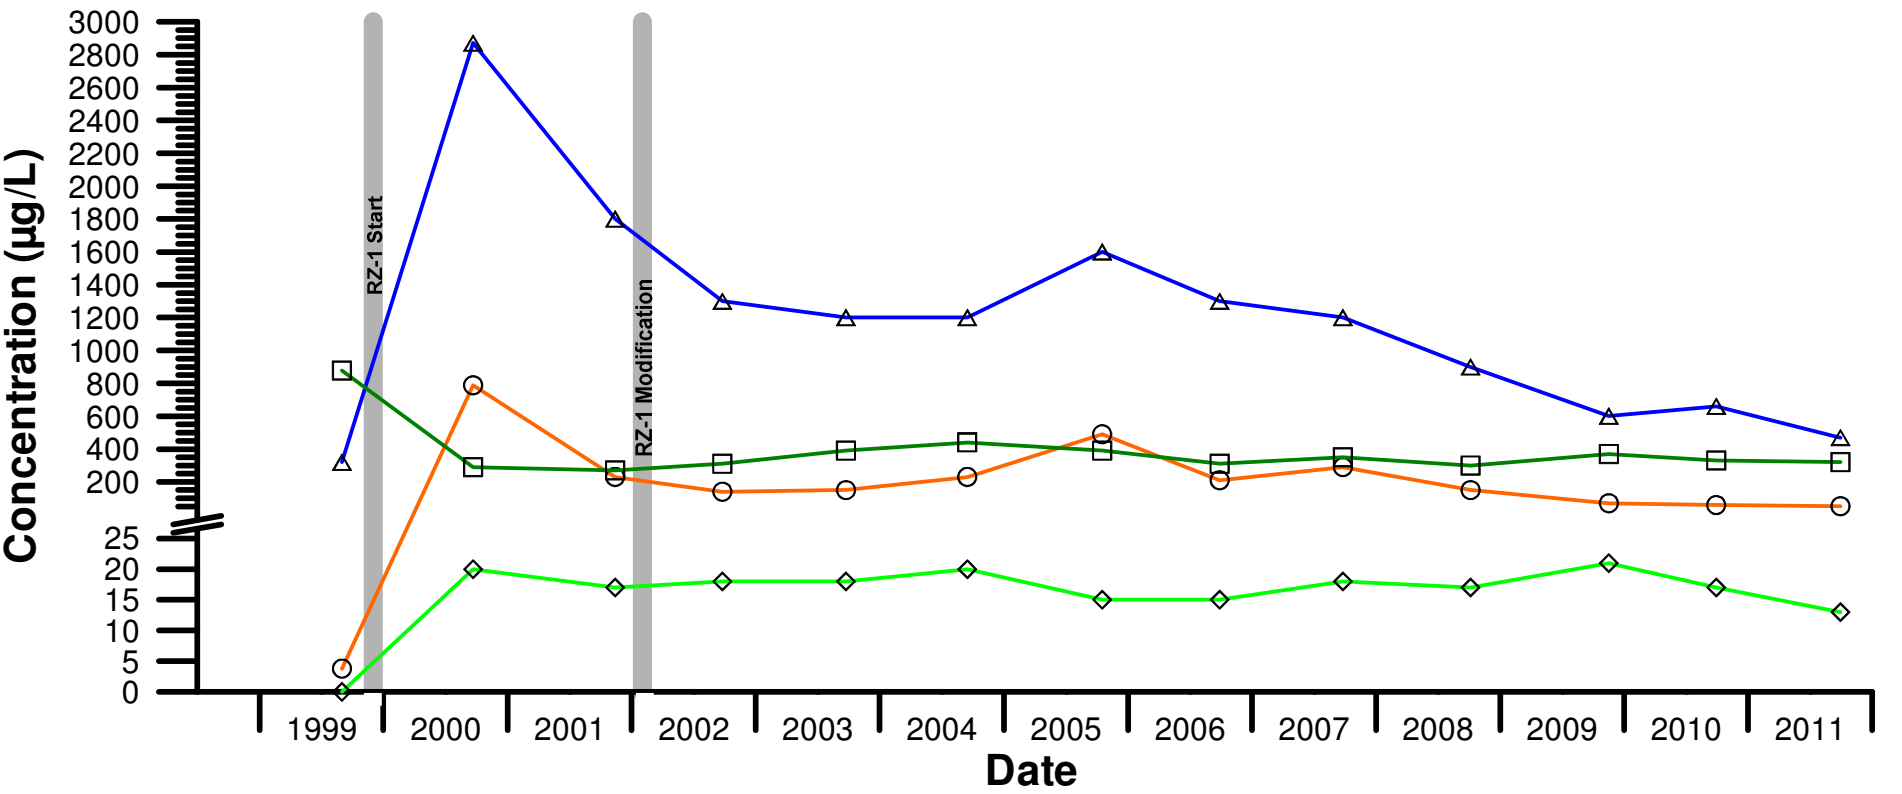


GM-28 (Downgradient Well)

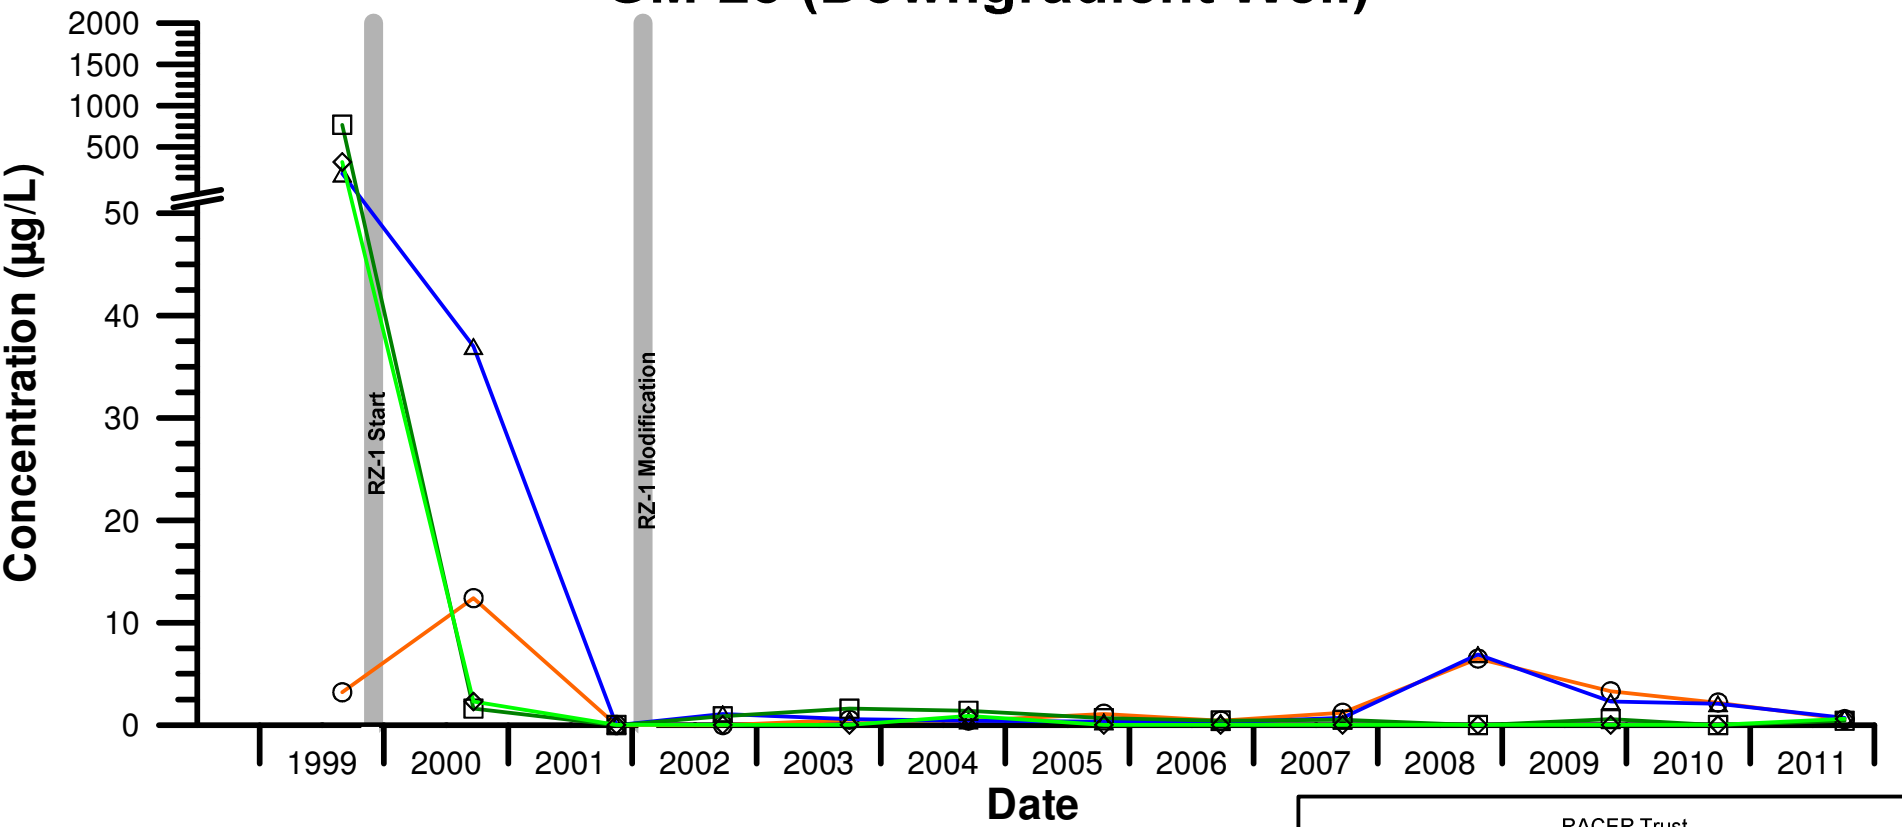

GM-22 (Upgradient)

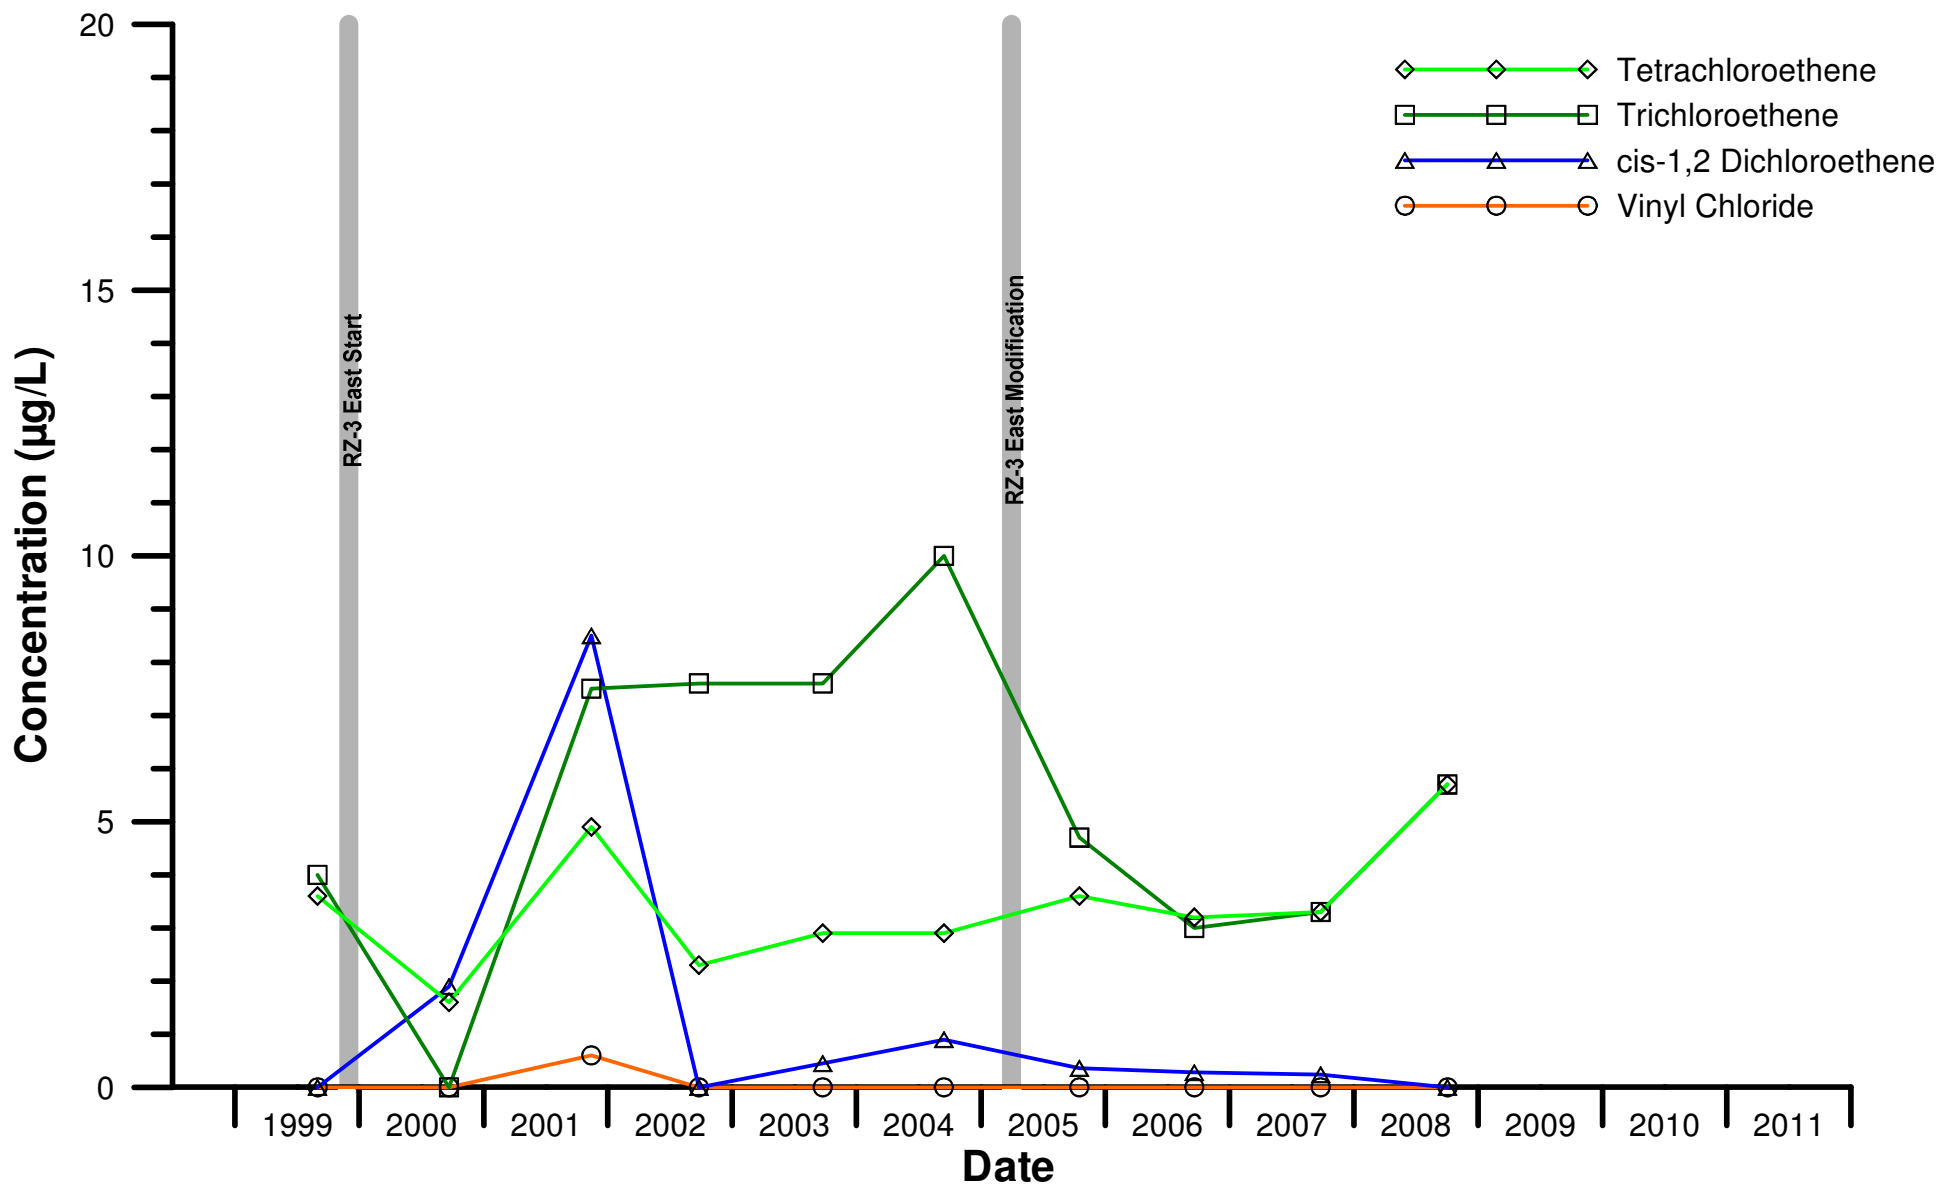




GM-21 (Downgradient Well)

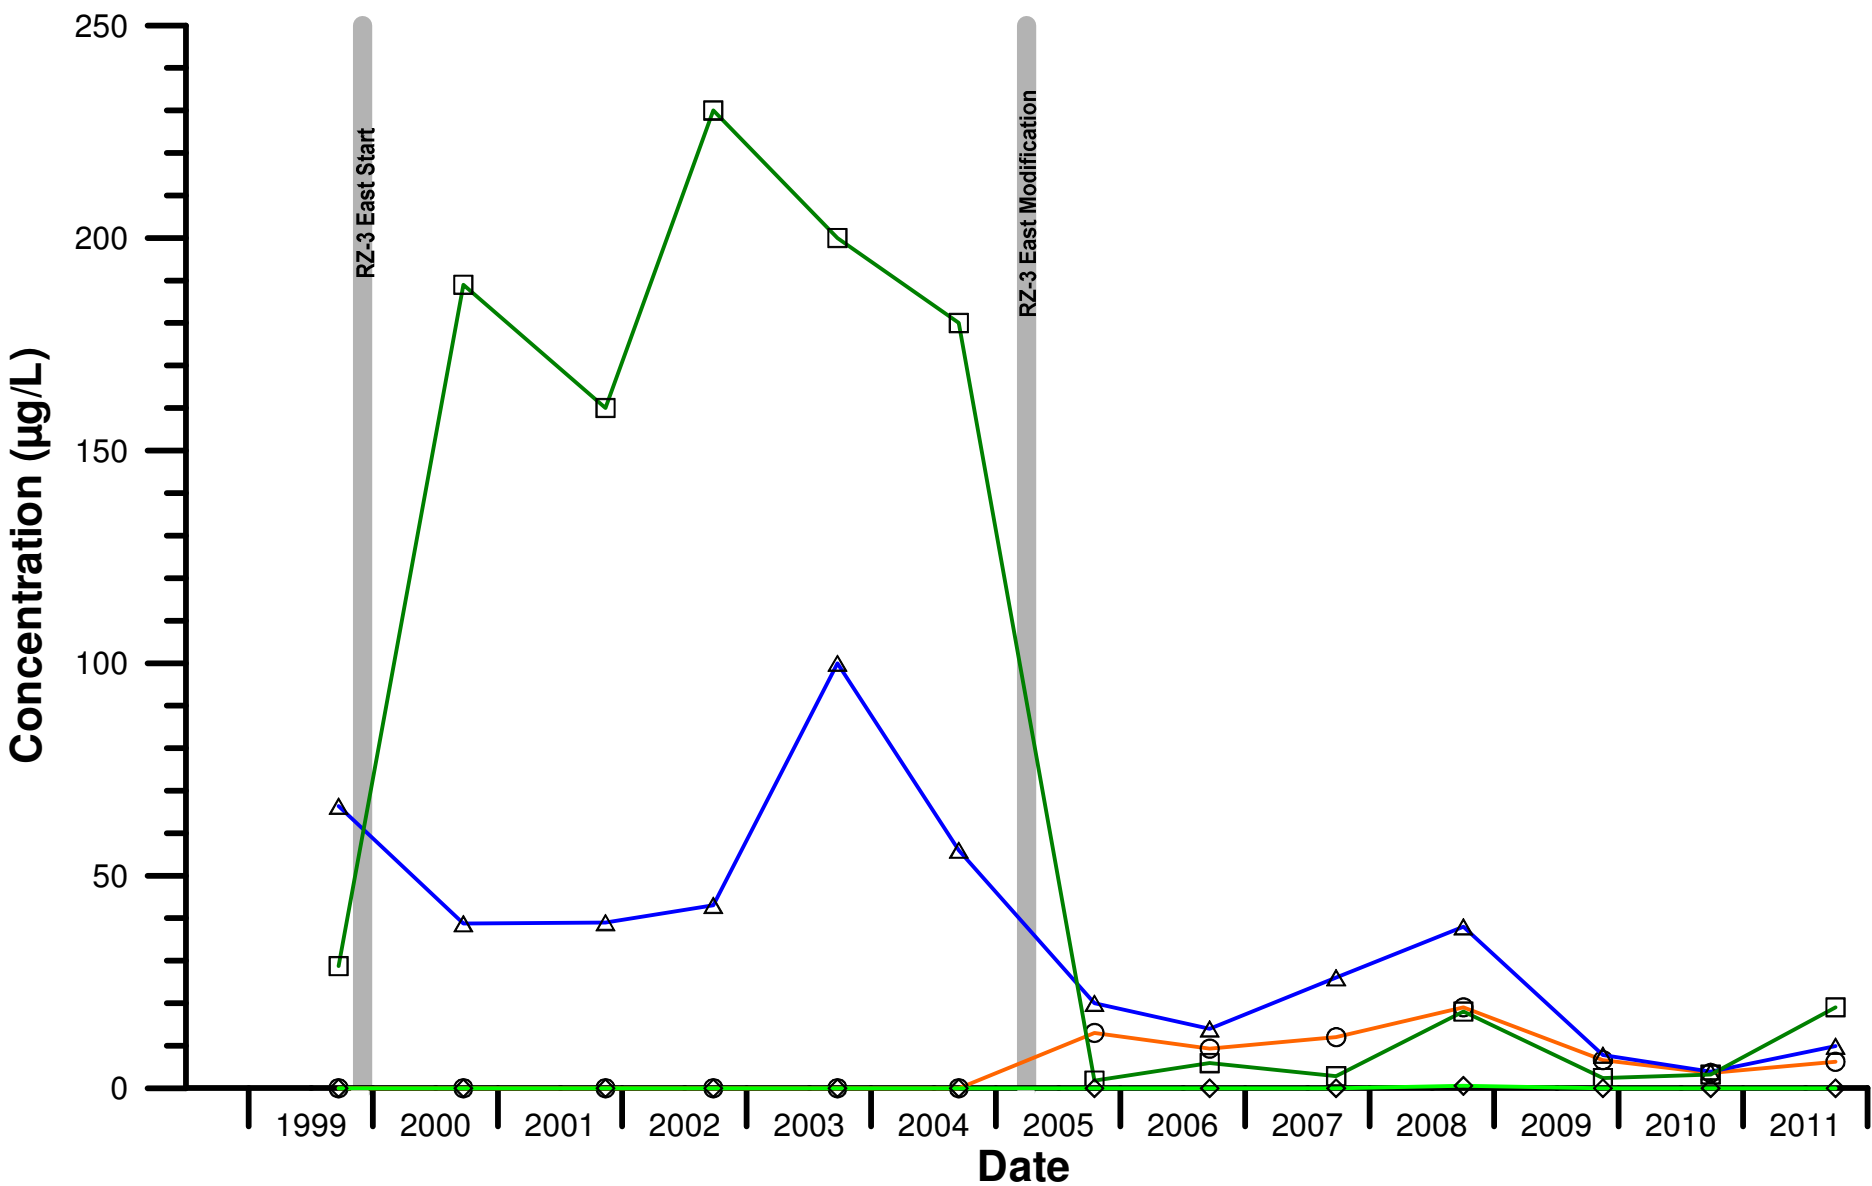

RACER Trust
MORaine, OHIO
OH000294.2012

RZ-3 East Area Groundwater
Concentration Graphs



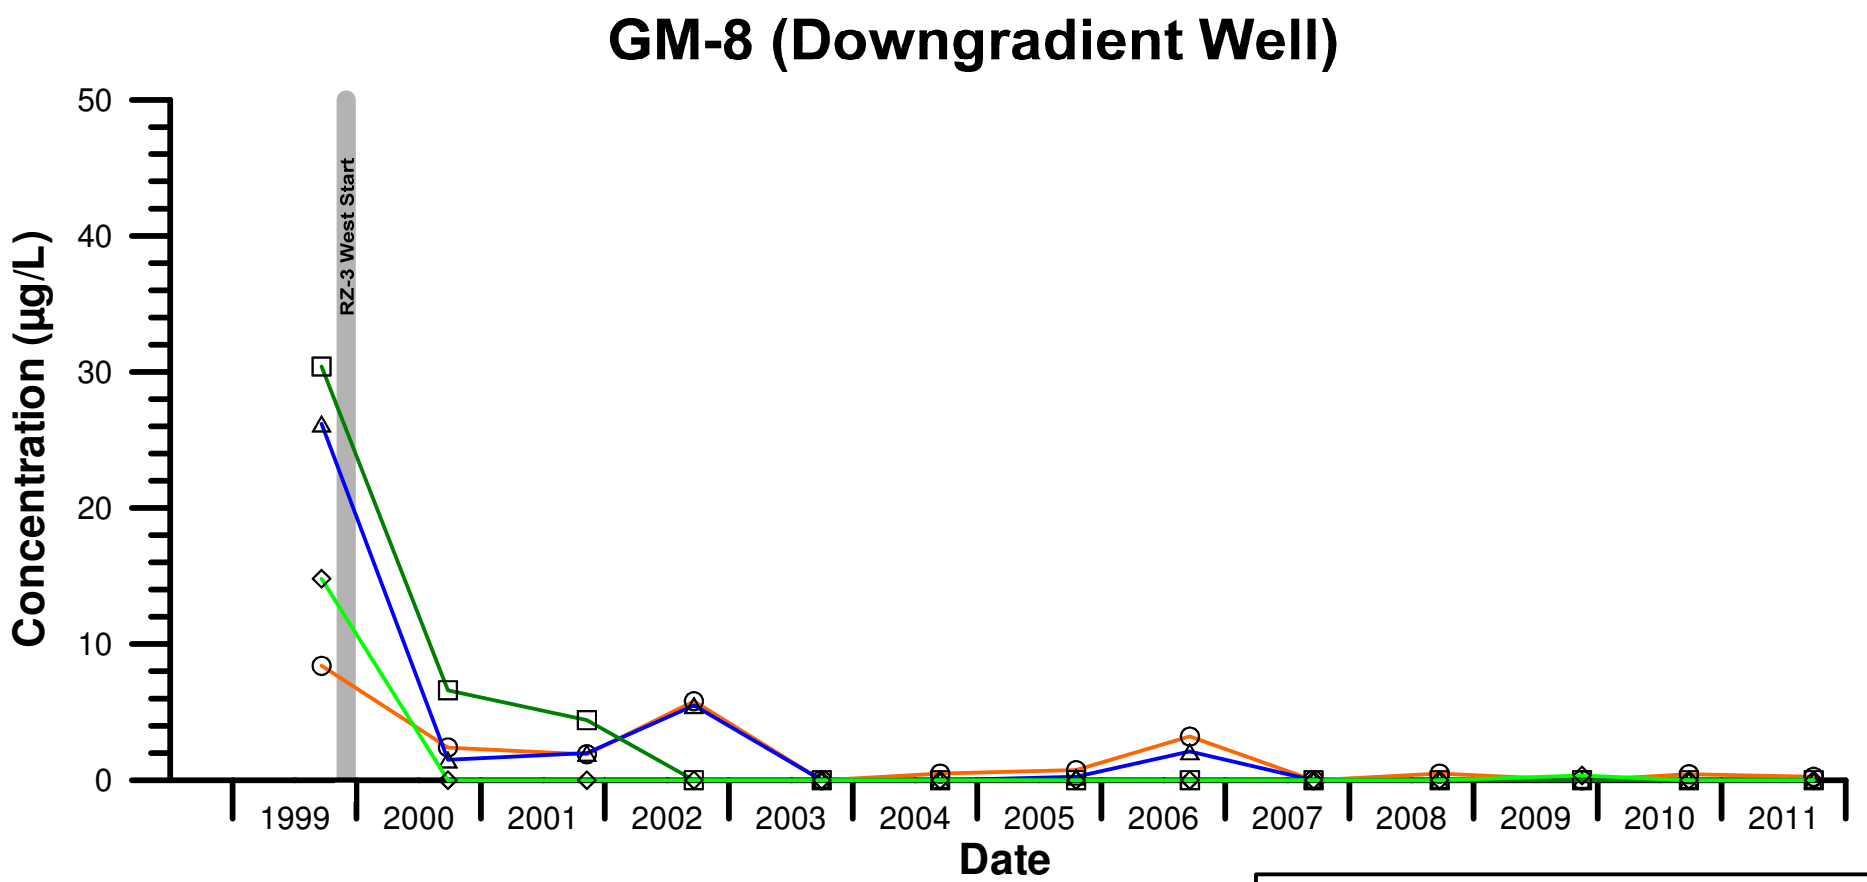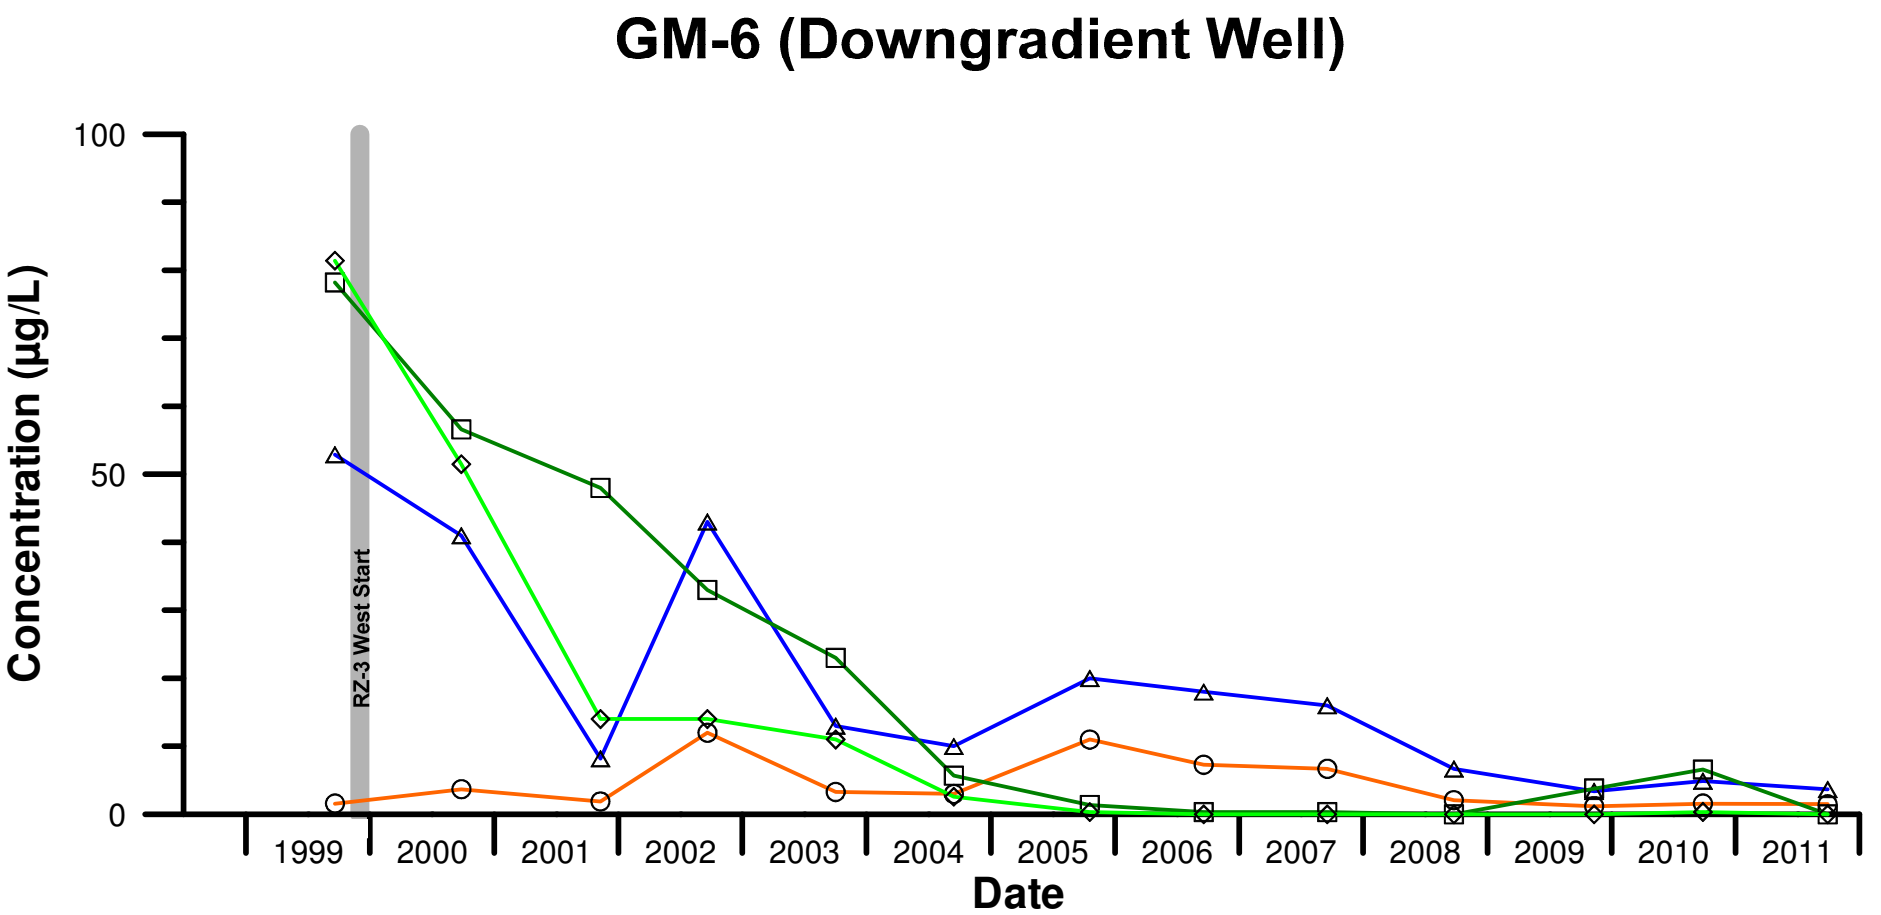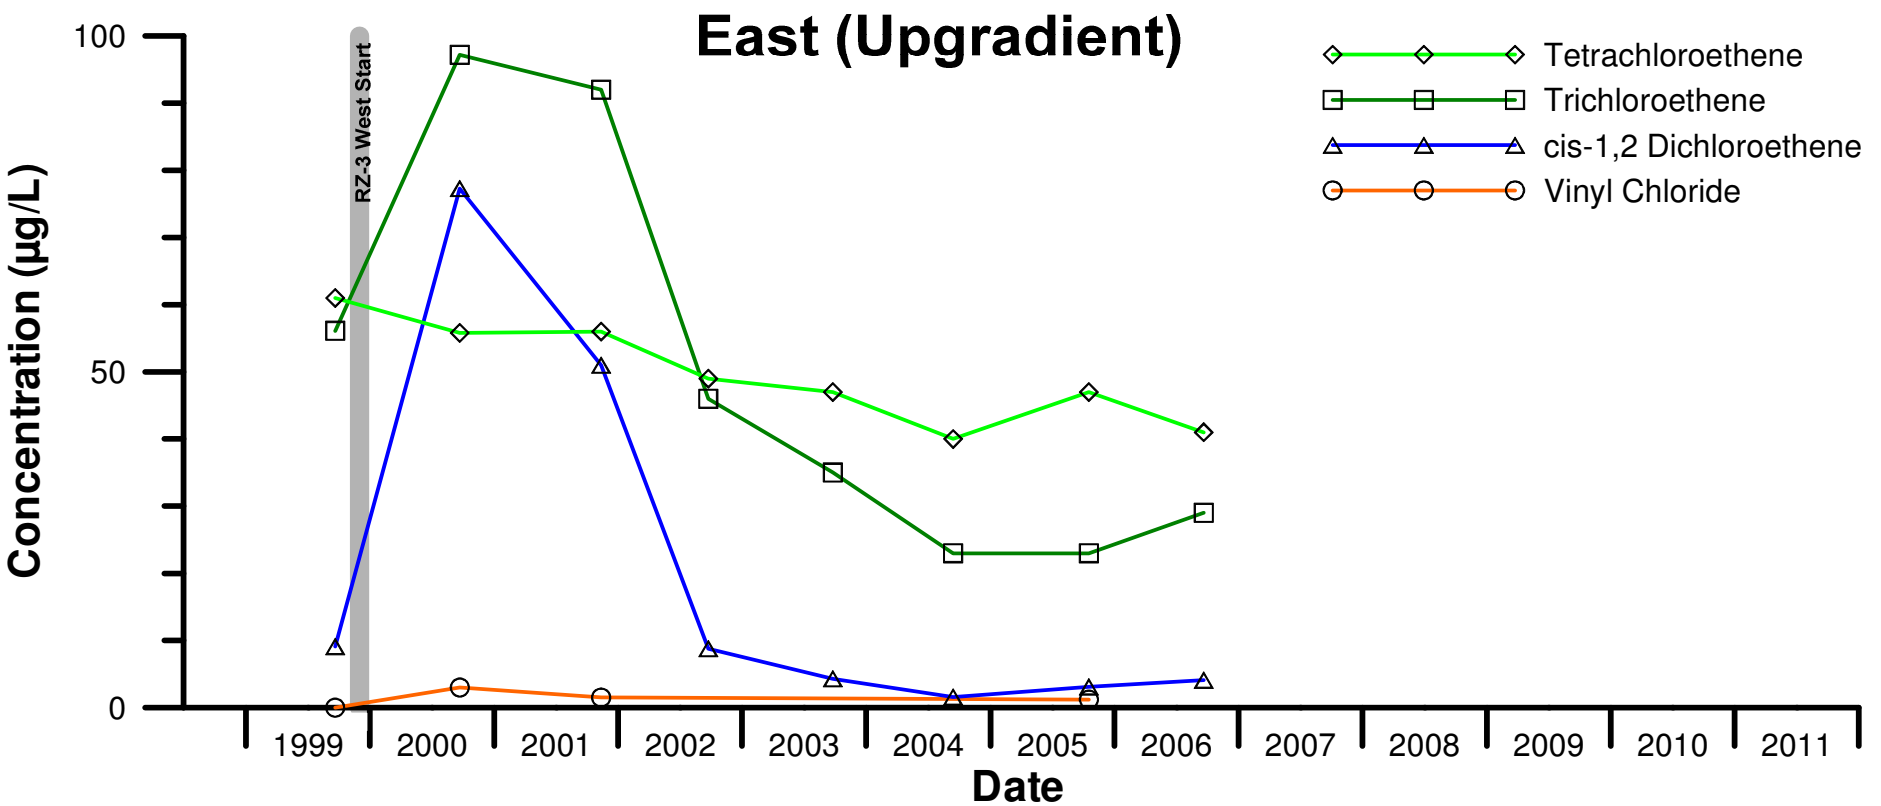

RACER Trust
MORaine, OHIO
OH000294.2012


RZ-3 West Area Groundwater Concentration Graphs



FIGURE

14

GM-19S (Downgradient Well)

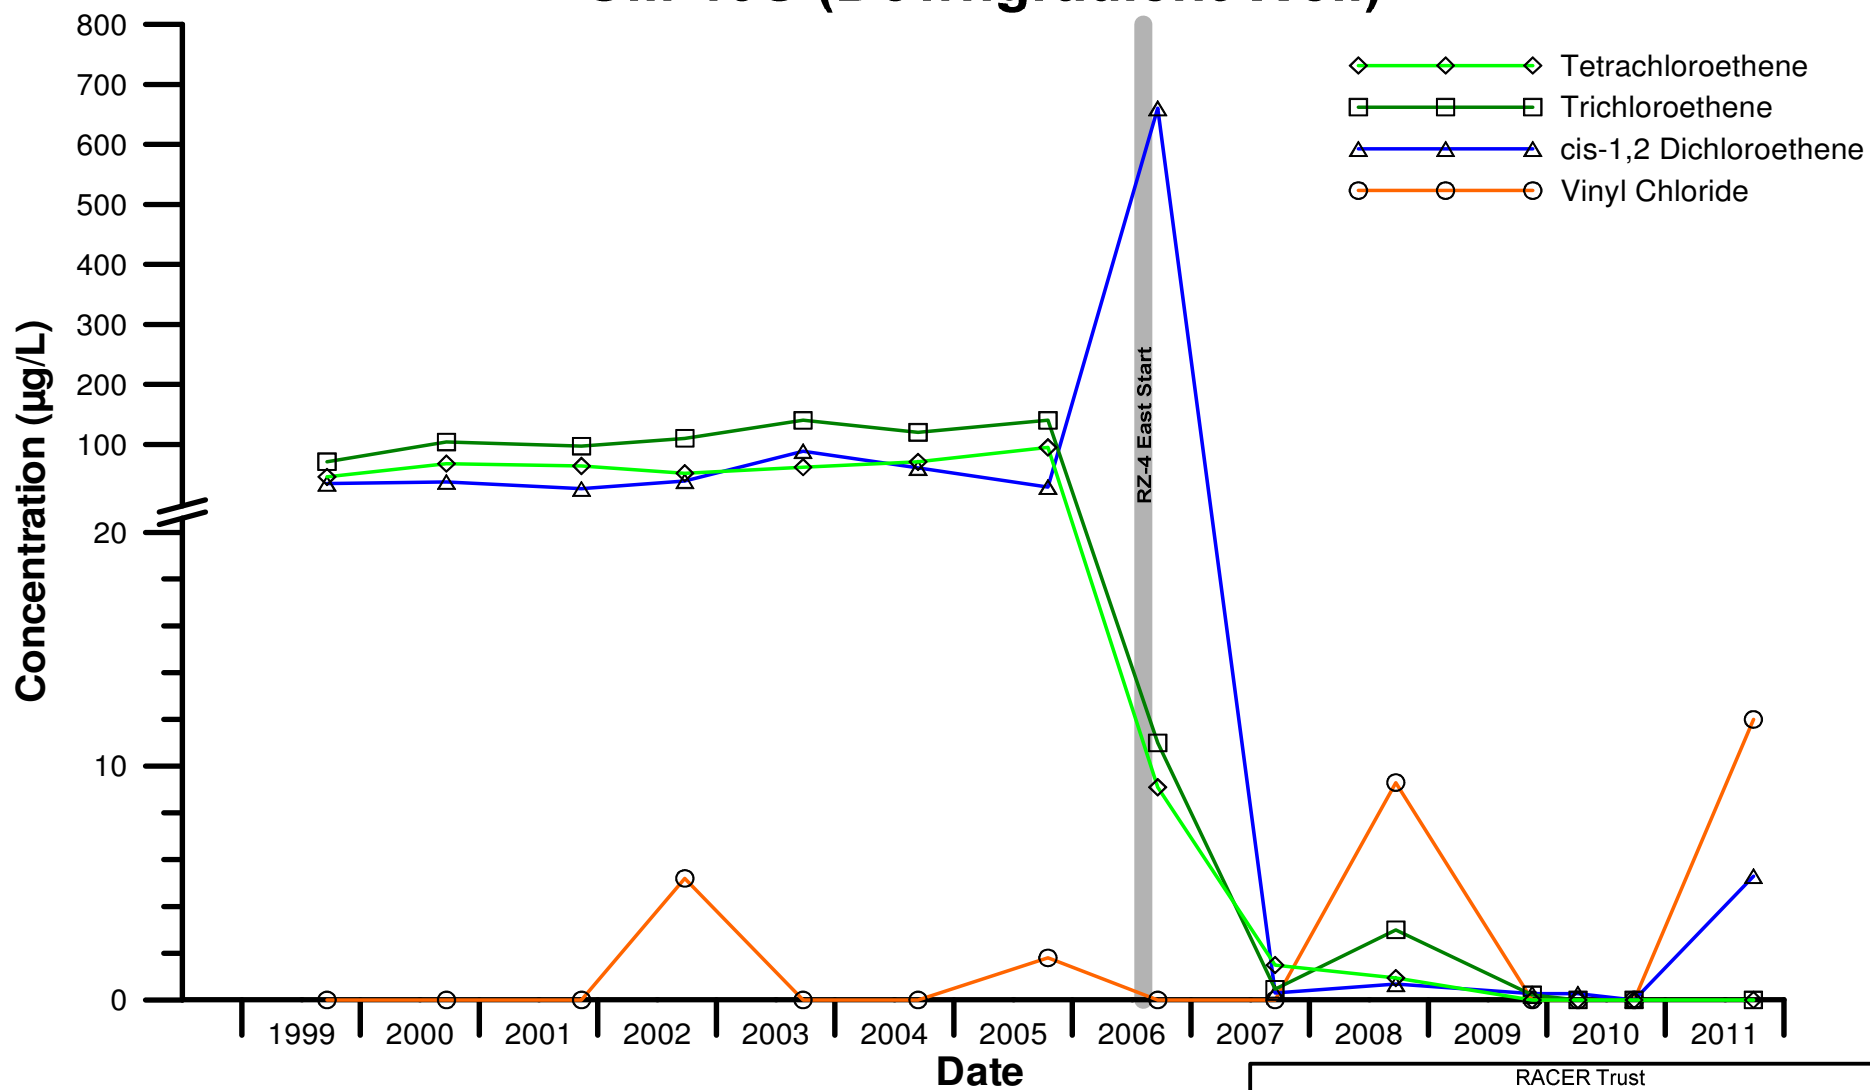

RACER Trust
Moraine, Ohio
OH000294.2012

RZ-4 East Area Groundwater
Concentration Graph



FIGURE
15



Appendix A

Site-Wide Groundwater VOC
Analytical Results from 1999 to 2010

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											Vinyl Chloride	Xylenes (total)
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethyl-benzene	PCE	Toluene	trans-1,2-DCE	TCE			
<u>Upgradient of the Site</u>														
HR-9	9/16/1999	20.3	52.2	<1.0	<1.0	20.3	<1.0	<1.0	<1.0	3.2	18.1	<1.0	<1.0	
	9/18/2000	20.5	51.0	<1.0	<1.0	16.3	<1.0	<1.0	<1.0	2.6	16.9	<1.0	<1.0	
	11/6/2001	17	38	0.95J	< 1.4	12	< 1.4	< 1.4	< 1.4	1.7	14	< 1.4	< 1.4	
	9/19/2002	13	46	1.1J	< 1.7	17	< 1.7	< 1.7	< 1.7	2.5	15	< 1.7	< 1.7	
	9/17/2003	12	35	< 1.2 U	< 1.2 U	11	< 1.2 U	< 1.2 U	< 1.2 U	1.5	11	< 1.2 U	< 1.2 U	
	9/13/2004	15	45	1 J	< 2 U	17	< 2 U	< 2 U	< 2 U	2.5	13	0.44 J	< 2 U	
	10/19/2005	14	42	0.97 J	< 1.2 U	19	< 1.2 U	< 1.2 U	< 1.2 U	2.8	12	0.46 J	< 2.5 U	
	9/21/2006	16	36	0.65 J	< 1.4 U	15	< 1.4 U	< 1.4 U	< 1.4 U	2.5	13	< 1.4 U	< 2.9 U	
	9/25/2007	8.9	62	0.56J	< 2.5 U	25	< 2.5 U	< 2.5 U	< 2.5 U	3.7	12	0.66J	<5 U	
	9/30/2008	8.2	58	0.49 J	< 2.5 U	32	< 2.5 U	< 2.5 U	< 2.5 U	4.5	11	< 2.5 U	< 5 U	
11/13/2009	8.6	59	0.47 J	< 2.0 U	31	< 2.0 U	< 2.0 U	< 2.0 U	4.3	9.9	0.52 J	< 4.0 U		
9/28/2010	4.6	74	0.50 J	< 2.5 U	38	< 2.5 U	< 2.5 U	< 2.5 U	5.3	9.5	0.67 J	< 5.0 U		
HR-11	9/14/1999	<1.0	13.5	<1.0	<1.0	3.3	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	
	9/18/2000	<1.0	32.9	<1.0	<1.0	18.5	<1.0	<1.0	<1.0	2.6	<1.0	<1.0	<1.0	
	11/6/2001	0.30J	33	<1.0	< 1.0	18	< 1.0	< 1.0	< 1.0	2.3	< 1.0	< 1.0	< 1.0	
	9/26/2002	< 1	18	< 1	< 1	6.1	< 1	< 1	< 1	0.72	< 1	< 1	< 1	
	9/18/2003	< 1 U	10	< 1 U	< 1 U	1.7	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	< 1 U	< 1 U	
	9/15/2004	< 1 U	7.3	< 1 U	< 1 U	0.45 J	< 1 U	2.2	< 1 U	< 0.5 U	< 1 U	< 1 U	< 1 U	
	10/17/2005	< 1.0 U	6.5	< 1.0 U	< 1.0 U	0.72 J	< 1.0 U	6.0	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U	
	9/25/2006	< 1 U	6.7	< 1 U	< 1 U	0.31 J	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U	
	9/19/2007	< 1 U	7.1	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U	
	9/25/2008	< 1 U	5.2	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U	
GM-24	9/23/1999	2.7	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0		
<u>On-Site</u>														
HR-8	9/16/1999	10.6	26.4	<1.0	<1.0	4.4	<1.0	<1.0	<1.0	1.5	1.6	<1.0	<1.0	
	9/18/2000	9.9	29.0	<1.0	<1.0	5.6	<1.0	<1.0	<1.0	1.8	1.1	<1.0	<1.0	
	11/6/2001	10	26	< 1.0	< 1.0	5.4	< 1.0	< 1.0	< 1.0	1.3	1.4	< 1.0	< 1.0	
	9/19/2002	11	18	0.44J	< 1.0	4.8	< 1.0	< 1.0	< 1.0	0.85	1.8	< 1.0	< 1.0	
	9/17/2003	7.8	13	< 1 U	< 1 U	2.8	< 1 U	< 1 U	< 1 U	0.63	1.3	< 1 U	< 1 U	
	9/13/2004	6.4	8.6	0.32 J	< 1 U	1.5	< 1 U	< 1 U	< 1 U	0.45 J	1	< 1 U	< 1 U	
	10/19/2005	4.4	5.5	0.19 J	< 1.0 U	1.3	< 1.0 U	0.24 J	< 1.0 U	0.28 J	0.66 J	< 1.0 U	< 2.0 U	
	9/21/2006	4.2	6.1	< 1 U	< 1 U	0.92 J	< 1 U	< 1 U	< 1 U	0.3 J	0.55 J	< 1 U	< 2 U	
W-1-N	9/17/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	
	9/19/2002	< 1.0	0.36J	< 1.0	< 1.0	< 0.50	< 1.0	< 1.0	< 1.0	< 0.50	< 1.0	< 1.0	< 1.0	
HR-4	9/14/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	1.2	<1.0	<1.0	1.4	<1.0	<1.0	
	9/20/2000	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	
	11/6/2001	0.17J	< 1.0	< 1.0	< 1.0	0.28J	< 1.0	0.88J	< 1.0	< 0.50	1.0	< 1.0	< 1.0	
	9/27/2002	< 1	< 1	< 1	< 1	< 0.5	< 1	0.59J	< 1	< 0.5	0.71J	< 1	< 1	
	9/18/2003	< 1 U	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	0.55 J	< 1 U	< 0.5 U	0.71 J	< 1 U	< 1 U	
	9/16/2004	< 1 U	0.77 J	< 1 U	< 1 U	< 0.5 U	< 1 U	1.3	< 1 U	< 0.5 U	0.5 J	< 1 U	< 1 U	
	10/20/2005	< 1.0 U	1.5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.39 J	< 1.0 U	< 1.0 U	0.32 J	< 1.0 U	< 2.0 U	
	9/25/2006	< 1 U	1.6	< 1 U	< 1 U	0.26 J	< 1 U	0.41 J	< 1 U	< 1 U	0.34 J	< 1 U	< 2 U	
	9/26/2007	< 1 U	3.6	< 1 U	< 1 U	< 1 U	< 1 U	0.33 J	< 1 U	< 1 U	0.31 J	< 1 U	< 2 U	
	9/30/2008	< 1 U	4.1	< 1 U	< 1 U	0.23 J	< 1 U	0.44 J	< 1 U	< 1 U	0.31 J	< 1 U	< 2 U	
	11/13/2009	< 1.0 U	5.5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.37 J	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U	
	9/28/2010	< 1.0 U	3.9	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.34 J	< 1.0 U	< 1.0 U	0.28 J	< 1.0 U	< 2.0 U	

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											Vinyl Chloride	Xylenes (total)
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethylbenzene	PCE	Toluene	trans-1,2-DCE	TCE			
W-2-N	9/14/1999	<1.0	<1.0	<1.0	<1.0	1.6	<1.0	<1.0	<1.0	<1.0	1.7	<1.0	<1.0	
	9/19/2000	<1.0	<1.0	<1.0	<1.0	1.2	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	
	11/6/2001	0.48J	0.33J	<1.0	<1.0	1.1	<1.0	<1.0	<1.0	<0.50	1.3	<1.0	<1.0	
	9/19/2002	<1.0	0.31J	<1.0	<1.0	1.6	<1.0	<1.0	<1.0	<0.50	1.4	<1.0	<1.0	
	9/18/2003	<1 U	<1 U	<1 U	<1 U	1.3	<1 U	<1 U	<1 U	<0.5 U	<1 U	<1 U	<1 U	
	9/16/2004	0.3 J	0.36 J	<1 U	<1 U	1.8	<1 U	0.31 J	<1 U	0.2 J	1.4	<1 U	<1 U	
	10/20/2005	<1.0 U	0.28 J	<1.0 U	<1.0 U	1.3	<1.0 U	<1.0 U	<1.0 U	<1.0 U	0.91 J	<1.0 U	<2.0 U	
	9/22/2006	0.25 J	0.29 J	<1 UJ	<1 UJ	1.4 J	<1 UJ	<1 UJ	<1 UJ	0.18 J	1 J	<1 UJ	<2 UJ	
	9/25/2007	<1 U	0.22 J	<1 U	<1 U	1.6	<1 U	<1 U	0.28J	<1 U	0.88J	<1 U	<2 U	
	9/29/2008	<1 U	<1 U	<1 U	<1 U	1.7	<1 U	<1 U	<1 U	<1 U	0.47 J	<1 U	<2 U	
	11/13/2009	<1.0 U	<1.0 U	<1.0 U	<1.0 U	1.5	<1.0 U	<1.0 U	<1.0 U	<1.0 U	0.37 J	<1.0 U	<2.0 U	
	9/24/2010	<1.0 U	<1.0 U	<1.0 U	<1.0 U	1.4	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<2.0 U	
W-3-N	9/17/1999	<1.0	<1.0	<1.0	<1.0	291	<1.0	2.5	<1.0	2.6	<1.0	12.8	<1.0	
	9/19/2000	<1.0	<1.0	<1.0	<1.0	282	<1.0	<1.0	<1.0	3.9	<1.0	24.0	<1.0	
	11/7/2001	<5.6	<5.6	<5.6	<5.6	160	<5.6	9.0	<5.6	2.2J	2.1J	7.6	<5.6	
	9/23/2002	<6.7	<6.7	<6.7	<6.7	150	<6.7	<6.7	<6.7	<3.3	<6.7	6.5J	<6.7	
	9/17/2003	<4 U	<4 U	<4 U	<4 U	100	<4 U	5.1	<4 U	1.6 J	1.7 J	6.6	<4 U	
	9/16/2004	<4 U	<4 U	<4 U	<4 U	120	<4 U	0.94 J	<4 U	1.6 J	<4 U	6.1	<4 U	
	10/20/2005	<4.0 U	<4.0 U	<4.0 U	<4.0 U	84	<4.0 U	1.4 J	<4.0 U	1.0 J	<4.0 U	8.0	<8.0 U	
	9/25/2006	<5 U	<5 U	<5 U	<5 U	140	<5 U	<5 U	<5 U	1.9 J	<5 U	9.6	<10 U	
	9/26/2007	<4 U	<4 U	<4 U	<4 U	110	<4 U	<4 U	<4 U	1.4 J	<4 U	5.6	<8 U	
	9/29/2008	<3.3 U	<3.3 U	<3.3 U	<3.3 U	98	<3.3 U	<3.3 U	<3.3 U	1.4 J	<3.3 U	3.8	<6.7 U	
	11/13/2009	<2.0 U	<2.0 U	<2.0 U	<2.0 U	72	<2.0 U	<2.0 U	<2.0 U	0.99 J	<2.0 U	3.2	<4.0 U	
	9/24/2010	<2.0 U	<2.0 U	<2.0 U	<2.0 U	56	<2.0 U	<2.0 U	<2.0 U	0.79 J	<2.0 U	2.4	<4.0 U	
W-4-N	9/17/1999	<1.0	1.3	<1.0	<1.0	2.2	<1.0	2.1	<1.0	<1.0	9.8	<1.0	<1.0	
	9/19/2000	<1.0	<1.0	<1.0	<1.0	2.0	<1.0	<1.0	<1.0	<1.0	7.3	<1.0	<1.0	
	11/7/2001	0.33J	0.89J	<1.0	<1.0	1.6	<1.0	0.92J	<1.0	<0.50	7.1	<1.0	<1.0	
	9/24/2002	0.44J	1.7	<1	<1	5.2	<1	0.94J	<1	0.33J	8.5	0.77J	<1	
	9/17/2003	0.26 J	0.94 J	<1 U	<1 U	1.7	<1 U	1.1	<1 U	<0.5 U	8.1	0.48 J	<1 U	
	9/16/2004	0.4 J	1.7	<1 U	<1 U	5.8	<1 U	1.7	<1 U	0.38 J	12	0.49 J	<1 U	
	10/20/2005	<1.0 U	1.2	<1.0 U	<1.0 U	2.0	<1.0 U	1.0	<1.0 U	<1.0 U	7.2	0.54 J	<2.0 U	
	9/25/2006	<1 U	1.3	<1 U	<1 U	2.4	<1 U	0.96 J	<1 U	0.19 J	7.6	0.56 J	<2 U	
	9/26/2007	0.34J	1.6	<1 U	<1 U	2.6	<1 U	0.88 J	<1 U	0.24 J	10	0.96 J	<2 U	
	9/29/2008	0.39 J	1.9	<1 U	<1 U	11	<1 U	0.38 J	<1 U	0.92 J	8.4	0.34 J	<2 U	
	11/13/2009	0.47 J	1.6	<1.0 U	<1.0 U	5.7	<1.0 U	0.68 J	<1.0 U	0.39 J	15	0.25 J	<2.0 U	
	9/24/2010	0.41 J	2.1	<1.0 U	<1.0 U	7.9	<1.0 U	0.67 J	<1.0 U	0.51 J	13	<1.0 U	<2.0 U	
HR-2	9/16/1999	<1.0	3.9	<1.0	<1.0	9.6	<1.0	<1.0	<1.0	1.5	<1.0	<1.0	<1.0	
	9/19/2000	<1.0	4.6	<1.0	<1.0	8.6	<1.0	<1.0	<1.0	1.1	<1.0	<1.0	<1.0	
	11/7/2001	<1.0	4.2	<1.0	<1.0	8.3	<1.0	<1.0	<1.0	1.1	0.56J	<1.0	<1.0	
	9/24/2002	<1	4.9	<1	<1	8.8	<1	<1	<1	1.2	0.46J	<1	<1	
	9/16/2003	<1 U	4.5	<1 U	<1 U	7.2	<1 U	<1 U	<1 U	0.96	0.4 J	<1 U	<1 U	
	9/16/2004	<1 U	5.6	<1 U	<1 U	7.8	<1 U	0.37 J	<1 U	1.1	0.53 J	0.23 J	<1 U	
	10/20/2005	<1.0 U	4.4	<1.0 U	<1.0 U	5.0	<1.0 U	<1.0 U	<1.0 U	0.78 J	0.35 J	0.29 J	<2.0 U	
	9/25/2006	<1 U	5.2	<1 U	<1 U	5.6	<1 U	<1 U	<1 U	0.79 J	0.48 J	<1 U	<2 U	
	9/26/2007	<1 U	5.3	<1 U	<1 U	5.0	<1 U	<1 U	<1 U	0.76J	0.45J	<1 U	<2 U	
	10/1/2008	<1 U	4.6	<1 U	<1 U	3.4	<1 U	<1 U	<1 U	0.47 J	0.36 J	<1 U	<2 U	
	11/13/2009	<1.0 U	5.6	<1.0 U	<1.0 U	3.7	<1.0 U	<1.0 U	<1.0 U	0.58 J	0.45 J	<1.0 U	<2.0 U	
	9/28/2010	<1.0 U	5.6	<1.0 U	<1.0 U	2.8	<1.0 U	<1.0 U	<1.0 U	0.41 J	0.39 J	<1.0 U	<1.0 U	

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethylbenzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes (total)
HR-3	9/16/1999	<1.0	6.2	<1.0	<1.0	6.1	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
	9/19/2000	<1.0	5.1	<1.0	<1.0	4.6	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
	11/7/2001	< 1.0	6.9	< 1.0	< 1.0	5.1	< 1.0	< 1.0	< 1.0	0.60	0.66J	< 1.0	< 1.0
	9/24/2002	< 1	15	< 1	< 1	9.9	< 1	< 1	< 1	1	1.4	< 1	< 1
	9/16/2003	< 1 U	13	< 1 U	< 1 U	9.9	< 1 U	< 1 U	< 1 U	1.1	1.6	< 1 U	< 1 U
	9/16/2004	0.27 J	23	< 1 U	< 1 U	18	< 1 U	0.32 J	< 1 U	1.8	8.1	< 1 U	< 1 U
	10/20/2005	0.34 J	18	< 1.0 U	< 1.0 U	11	< 1.0 U	< 1.0 U	< 1.0 U	1.5	10	< 1.0 U	< 2.0 U
	9/25/2006	< 1 U	10	< 1 U	< 1 U	8.2	< 1 U	< 1 U	< 1 U	0.99 J	7.2	< 1 U	< 2 U
	10/2/2008	0.84 J	16	0.27 J	< 1 UJ	17	< 1 U	< 1 U	< 1 U	1.6	32	2.2	< 2 U
GM-30	9/2/1999	<10	53.8J	<10	<10	7.5J	7030J	9.5J	6950J	<10	<10	<10	23300J
	9/20/2000	<1.0	50.6	<1.0	2.7	<1.0	2290	<1.0	98.9	<1.0	<1.0	<1.0	6770
	11/13/2001	< 25	31	< 25	< 25	< 12	840	< 25	5.0J	< 12	12J	< 25	2000
	9/27/2002	< 33	34	< 33	< 33	< 17	350	< 33	< 33	< 17	< 33	< 33	1400
	9/23/2003	< 120 U	< 120 U	< 120 U	< 120 U	< 62 U	1000	< 120 U	240	< 62 U	< 120 U	< 120 U	7000
	9/14/2004	< 40 U	33 J	< 40 U	< 40 U	< 20 U	530	< 40 U	< 40 U	< 20 U	< 40 U	< 40 U	3000
	10/17/2005	< 50 U	23 J	< 50 U	< 50 U	< 50 U	620	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	3800
	9/20/2006	< 33 U	25 J	< 33 U	< 33 U	< 33 U	570	< 33 U	5.8 J	< 33 U	< 33 U	< 33 U	2500
	9/26/2007	< 18 U	16 J	< 18 U	< 18 U	< 18 U	380	< 18 U	< 18 U	< 18 U	< 18 U	< 18 U	1300
10/6/2008	< 10 U	11	< 10 U	< 10 U	< 10 U	300	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	670	
GM-23	9/2/1999	7.2	32.5	17.2	1.9	7530	<1.0	6250	<1.0	54.5	1460	2500	7.0
	9/20/2000	2.0	16.3	5.1	<1.0	5620	<1.0	3470	<1.0	33.2	609	801	<1.0
	11/12/2001	< 420	< 420	< 420	< 420	8400	< 420	15000	< 420	< 210	2200	1200	< 420
	9/26/2002	< 400	< 400	< 400	< 400	7700	< 400	10000	< 400	< 200	1700	540	< 400
	9/23/2003	< 500 U	< 500 U	< 500 U	< 500 U	5800	< 500 U	12000	< 500 U	< 250 U	1600	690	< 500 U
	9/14/2004	< 500 U	< 500 U	< 500 U	< 500 U	4600	< 500 U	6700	< 500 U	< 250 U	1100	870	< 500 U
	10/17/2005	< 560 U	< 560 U	< 560 U	< 560 U	19000	< 560 U	2300	< 560 U	< 560 U	490 J	2800	< 1100 U
	9/28/2006	< 330 U	< 330 U	< 330 U	< 330 U	11000	< 330 U	370	< 330 U	270 J	95 J	4100	< 670 U
	9/27/2007	< 200 U	< 200 U	< 200 U	< 200 U	4700	< 200 U	280	< 200 U	130 J	82 J	2600	< 400 U
10/23/2008	< 62 U	< 62 U	< 62 U	< 62 U	2000	< 62 U	71	< 62 U	58 J	< 62 U	2100	< 120 U	
11/17/2009	< 20 U	5.0 J	< 20 U	< 20 U	1100	< 20 U	19 J	< 20 U	31	8.3 J	1100	< 40 U	
9/29/2010	< 22 U	< 22 U	< 22 U	< 22 U	490	< 22 U	50	< 22 U	16 J	17 J	500	< 44 U	
GM-27	9/1/1999	<1.0	2.4	<1.0	<1.0	20.6	<1.0	1.7	<1.0	<1.0	121	<1.0	<1.0
	9/20/2000	<1.0	2.2	<1.0	<1.0	13.9	<1.0	1.2	<1.0	<1.0	112	<1.0	<1.0
	11/13/2001	< 3.3	1.8J	< 3.3	< 3.3	13	< 3.3	6.8	< 3.3	< 1.7	110	< 3.3	< 3.3
	9/26/2002	< 3.3	1.7J	< 3.3	< 3.3	14	< 3.3	< 3.3	< 3.3	< 1.7	100	< 3.3	< 3.3
	9/23/2003	< 5 U	1.9 J	< 5 U	< 5 U	12	< 5 U	2.1 J	< 5 U	< 2.5 U	100	< 5 U	< 5 U
	9/15/2004	< 3.3 U	2 J	< 3.3 U	< 3.3 U	13	< 3.3 U	1.8 J	< 3.3 U	< 1.7 U	81	< 3.3 U	< 3.3 U
	10/17/2005	< 2.5 U	2.2 J	< 2.5 U	< 2.5 U	14	< 2.5 U	0.94 J	< 2.5 U	0.49 J	76	0.82 J	< 5.0 U
	9/28/2006	< 2.5 U	2.6	< 2.5 U	< 2.5 U	14	< 2.5 U	1 J	< 2.5 U	1 J	80	< 2.5 U	< 5 U
	9/27/2007	< 2 U	2.3	< 2 U	< 2 U	12	< 2 U	0.9 J	< 2 U	0.41 J	70	< 2 U	< 4 U
10/23/2008	< 1.4 U	2	< 1.4 U	< 1.4 U	11	< 1.4 U	0.9 J	< 1.4 U	0.51 J	57	0.44 J	< 2.9 U	
GM-29	9/1/1999	37.8	4.3	1.3	<1.0	320	<1.0	<20	<1.0	11.1	878	3.8	<1.0
	9/21/2000	24.5	16.6	3.1	<1.0	2871	<1.0	20.0	2.2	14.4	289	788	<1.0
	11/13/2001	< 50	< 50	< 50	< 50	1800	21J	17J	< 50	26	270	230	52
	9/25/2002	16J	< 40	< 40	< 40	1300	< 40	18J	< 40	21	310	140	< 40
	9/24/2003	18 J	< 33 U	< 33 U	< 33 U	1200	< 33 U	18 J	< 33 U	20	390	150	< 33 U
	9/15/2004	21 J	< 50 U	< 50 U	< 50 U	1200	< 50 U	20 J	< 50 U	21 J	440	230	< 50 U
	10/17/2005	19 J	18 J	< 50 U	< 50 U	1600	< 50 U	15 J	< 50 U	27 J	390	490	< 100 U
	9/28/2006	17 J	15 J	< 33 U	< 33 U	1300	< 33 U	15 J	< 33 U	20 J	310	210	< 67 U
	9/26/2007	15 J	15 J	< 50 U	< 50 U	1200	< 50 U	18 J	< 50 U	19 J	350	290	< 100 U
	10/6/2008	12 J	11 J	< 33 U	< 33 U	900	< 33 U	17 J	< 33 U	16 J	300	150	< 67 U
	11/17/2009	18	12	< 10 U	< 10 U	600	< 10 U	21 J	< 10 U	20	370	70	< 20 U
	9/29/2010	11 J	11 J	< 20 U	< 20 U	660	< 20 U	17 J	< 20 U	19 J	330	59	< 40 U

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethylbenzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes (total)
GM-28	9/1/1999	17.7	3.3	<1.0	<1.0	175	<1.0	316	<1.0	9.2	768	3.2	<1.0
	9/21/2000	5.0	9.9	<1.0	<1.0	37.0	<1.0	2.3	<1.0	22.3	1.6	12.4	<1.0
	11/15/2001	< 10	< 10	< 10	< 10	< 5.0	< 10	< 10	< 10	11	< 10	< 10	< 10
	9/24/2002	< 1	2.7	< 1	< 1	1.1	< 1	< 1	< 1.3 U	11	0.86J	< 1	< 1.2 U
	10/1/2003	< 1 U	3.3	< 1 U	< 1 U	0.58	< 1 U	< 1 U	< 1 U	4	1.6	0.53 J	< 1 U
	9/15/2004	< 1 U	3.3	< 1 U	< 1 U	0.41 J	< 1 U	0.88 J	< 1 U	1.2	1.4	0.44 J	< 1 U
	10/18/2005	< 1.0 U	4.0	< 1.0 U	< 1.0 U	0.32 J	< 1.0 U	< 1.0 U	< 1.0 U	0.63 J	0.66 J	1.1	< 2.0 U
	9/27/2006	< 1 U	4.2	< 1 U	< 1 U	0.26 J	< 1 U	< 1 U	< 1 U	0.66 J	0.43 J	0.42 J	< 2 U
	9/20/2007	< 1 U	4.6	< 1 U	< 1 U	0.72 J	< 1 U	< 1 U	< 1 U	0.58 J	0.51 J	1.2	< 2 U
	10/22/2008	< 5 U	2.2 J	< 5 U	< 5 U	6.9	< 5 U	< 5 U	< 5 U	1.3 J	< 5 U	6.5	< 10 U
	11/16/2009	< 1.0 U	3.6	< 1.0 U	< 1.0 U	2.3	< 1.0 U	< 1.0 U	< 1.0 U	1.7	0.58 J	3.3	< 2.0 U
	9/28/2010	< 1.0 U	4.6	< 1.0 U	< 1.0 U	2.1	< 1.0 U	< 1.0 U	< 1.0 U	1.5	< 1.0 U	2.2	< 2.0 U
GM-25	9/22/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
	10/21/2010	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
HR-7	9/17/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	9.8	<1.0	<1.0
	9/19/2002	< 1.0	< 1.0	< 1.0	< 1.0	0.65	< 1.0	< 1.0	< 1.0	< 0.50	9.4	< 1.0	< 1.0
	9/19/2002	< 1.0	< 1.0	< 1.0	< 1.0	0.65	< 1.0	< 1.0	< 1.0	< 0.50	9.4	< 1.0	< 1.0
	2/26/2008	< 1 U	0.26 J	< 1 U	< 1 U	0.94 J	< 1 U	< 1 U	< 1 U	< 1 U	7.3	< 1 U	< 2 U
	9/23/2010	< 1.0 U	0.26 J	< 1.0 U	< 1.0 U	1.4	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	7.5	< 1.0 U	< 2.0 U
HR-5	9/16/1999	<1.0	<1.0	<1.0	<1.0	10.5	<1.0	<1.0	<1.0	1.1	12.0	<1.0	<1.0
	9/19/2000	<1.0	<1.0	<1.0	<1.0	5.6	<1.0	<1.0	<1.0	3.0	<1.0	8.1	<1.0
	11/7/2001	0.17J	0.55J	< 1.0	< 1.0	7.8	< 1.0	< 1.0	< 1.0	0.74	11	< 1.0	< 1.0
	9/23/2002	< 1	0.55J	< 1	< 1	7.5	< 1	< 1	< 1	0.58	13	< 1	< 1
	9/18/2003	< 1 U	0.42 J	< 1 U	< 1 U	5	< 1 U	< 1 U	< 1 U	0.46 J	11	< 1 U	< 1 U
	9/13/2004	< 1 U	0.43 J	< 1 U	< 1 U	4.8	< 1 U	< 1 U	< 1 U	0.44 J	11	< 1 U	< 1 U
	10/18/2005	< 1.0 U	0.54 J	< 1.0 U	< 1.0 U	4.6	< 1.0 U	< 1.0 U	< 1.0 U	0.52 J	13	1.1	< 2.0 U
	9/22/2006	< 1 UJ	0.41 J	< 1 UJ	< 1 UJ	5.2 J	< 1 UJ	0.27 J	< 1 UJ	0.46 J	13 J	0.22 J	< 2 UJ
	9/24/2007	< 1 U	0.51J	< 1 U	< 1 U	5.4	< 1 U	< 1 U	< 1 U	0.41J	13	< 1 U	< 2 U
	9/29/2008	< 1 U	0.48 J	< 1 U	< 1 U	5.4	< 1 U	< 1 U	< 1 U	0.59 J	13	< 1 U	< 2 U
HR-6	9/16/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	2.0	<1.0	<1.0
	9/23/2002	< 1	< 1	< 1	< 1	< 0.5	< 1	< 1	< 1	< 0.5	1.5	< 1	< 1
HR-1	9/16/1999	1.6	2.4	<1.0	<1.0	5.8	<1.0	44.3	<1.0	3.9	56.0	<1.0	<1.0
	9/25/2000	1.3	2.4	<1.0	<1.0	8.5	<1.0	32.6	<1.0	3.2	56.4	<1.0	<1.0
	11/8/2001	2.2J	2.8J	< 3.3	< 3.3	9.9	< 3.3	36	< 3.3	2.8	86B	< 3.3	< 3.3
	9/23/2002	< 2	2.8	< 2	< 2	4.5	< 2	33	< 2	3.2	33	< 2	< 2
	9/18/2003	1 J	2.6	< 2 U	< 2 U	2.3	< 2 U	27	< 2 U	3.2	56	< 2 U	< 2 U
	9/13/2004	0.56 J	2.5	< 1 U	< 1 UJ	24	< 1 U	23	< 1 U	2.3	30	0.55 J	< 1 U
	10/18/2005	1.2	2.7	< 1.0 U	< 1.0 U	19	< 1.0 U	28	< 1.0 U	2.3	43	1.1	< 2.0 U
	9/25/2006	0.57 J	1.7	< 1.7 U	< 1.7 U	14	< 1.7 U	< 1.7 U	< 1.7 U	1.4 J	50	< 1.7 U	< 3.3 U
	9/24/2007	0.45J	2.2	0.21J	< 1 U	9.5	< 1 U	20	< 1 U	1.9	40	< 1 U	< 2 U
	9/29/2008	0.77 J	1.8 J	< 2.5 U	< 2.5 U	5	< 2.5 U	27	< 2.5 U	2 J	70	< 2.5 U	< 5 U
W-1-S	9/22/1999	<1.0	<1.0	<1.0	<1.0	8.0	<1.0	30.9	<1.0	1.1	11.6	<1.0	<1.0
	9/19/2002	< 2.0	0.97J	< 2.0	< 2.0	6.0	< 2.0	62	< 2.0	1.3	16	< 2.0	< 2.0
ME-6	8/31/1999	2.9	<1.0	<1.0	<1.0	255	<1.0	213	<1.0	<1.0	474	<1.0	<1.0
	9/21/2000	<1.0	<1.0	<1.0	<1.0	98.8	<1.0	6.7	1.9	2.5	19.0	6.1	<1.0
	11/15/2001	2.2	2.7	< 2.0	< 2.0	65	< 2.0	8.2	0.42J	1.8	23	13	< 2.0
	9/25/2002	< 10	< 10	< 10	< 10	5.2	< 10	< 10	6.6J	< 5	< 10	< 10	< 10
	10/1/2003	13	7.2	< 2 U	0.46 J	20	< 2 U	12	< 2 U	< 1 U	31	2.9	< 2 U
	9/15/2004	4.1	6.3	0.26 J	< 1 U	14	< 1 U	5.3	< 1 U	0.56	9.2	2.4	< 1 U
	10/18/2005	2.2	7.0	< 1.0 U	< 1.0 U	13	< 1.0 U	9.8	< 1.0 U	0.93 J	25	5.6	< 2.0 U
	9/27/2006	1.4	6.3	< 1.4 U	< 1.4 U	27	< 1.4 U	13	< 1.4 U	1.3 J	32	11	< 2.9 U
	9/20/2007	0.61 J	6.4	< 1 U	< 1 U	9.2	< 1 U	4.5	< 1 U	0.51 J	12	4.5	< 2 U
	10/22/2008	2.7	11	< 1 U	< 1 U	5.2	< 1 U	7.7	< 1 U	0.25 J	9	1.7	< 2 U
ME-1	8/31/1999	13.5	2.4	<1.0	<1.0	38.2	<1.0	83.6	<1.0	1.5	292	36	<1.0

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											Vinyl Chloride	Xylenes (total)
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethylbenzene	PCE	Toluene	trans-1,2-DCE	TCE			
GM-31	9/1/1999	<1.0	1.3	<1.0	<1.0	7.8	<1.0	1.3	<1.0	<1.0	27.2	<1.0	<1.0	
	9/21/2000	<1.0	1.1	<1.0	<1.0	40.2	<1.0	<1.0	<1.0	<1.0	8.5	<1.0	<1.0	
	11/15/2001	< 4.0	3.1J	< 4.0	< 4.0	120	< 4.0	< 4.0	< 4.0	1.8J	11	7.4	< 4.0	
	9/24/2002	< 6	5.9J	< 6	< 6	200	< 6	< 6	< 6	3.5	10	19	< 6	
	10/1/2003	< 5 U	6	< 5 U	< 5 U	170	< 5 U	< 5 U	< 5 U	3.5	28	10	< 5 U	
	9/15/2004	1.4 J	4 J	< 5 U	< 5 U	120	< 5 U	2.5 J	< 5 U	2.7	29	2.4 J	< 5 U	
	10/18/2005	3.4	6.2	0.42 J	< 2.0 U	120	< 2.0 U	< 2.0 U	< 2.0 U	3.7	67	3.1	< 4.0 U	
	9/27/2006	2.3 J	5.1	< 4 U	< 4 U	110	< 4 U	< 4 U	< 4 U	2.9 J	65	1.2 J	< 8 U	
	9/20/2007	3.7	4.8	< 3.3 U	< 3.3 U	100	< 3.3 U	< 3.3 U	< 3.3 U	2.8 J	90	1.1 J	6.7 U	
	10/23/2008	2.9	3.2	< 2.5 U	< 2.5 U	76	< 2.5 U	< 2.5 U	< 2.5 U	3	78	0.9 J	< 5 U	
ME-3	8/31/1999	42.5	6.1	<1.0	<1.0	5.7	<1.0	57.9	<1.0	<1.0	47.5	<1.0	<1.0	
	9/21/2000	6.4	3.4	<1.0	<1.0	2.9	<1.0	<1.0	1.4	2.9	<1.0	2.1	<1.0	
	11/15/2001	1.6	5.9	<1.0	<1.0	16	<1.0	1.3	0.34J	2.7	3.8	7.3	<1.0	
	9/24/2002	< 2.5	< 2.5	< 2.5	< 2.5	< 1.2	< 2.5	< 2.5	< 2.5	< 1.2	< 2.5	< 2.5	< 2.5	
	10/1/2003	0.31 J	24	< 1 U	0.6 J	0.96	< 1 U	< 1 U	< 1 U	< 0.5 U	1.5	< 1 U	< 1 U	
	9/15/2004	0.53 J	18	< 1 U	< 1 U	2.2	< 1 U	0.21 J	< 1 U	< 0.5 U	1.5	1.1	< 1 U	
	10/18/2005	1.6	15	< 1.0 U	< 1.0 U	1.1	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	1.9	1.6	< 2.0 U	
	9/27/2006	1.1	8.5	< 1 U	< 1 U	3.5	< 1 U	1.9	< 1 U	0.34 J	2.4	2.2	< 2 U	
	9/20/2007	2	3.8	< 1 U	< 1 U	1.2	< 1 U	5.2	< 1 U	< 1 U	3.6	0.82 J	< 2 U	
	10/22/2008	2.1	1.8	< 1 U	< 1 U	1.4	< 1 U	8.1	< 1 U	< 1 U	4.9	0.7 J	< 2 U	
GM-43	8/19/2004	< 9.1 U	6.9 J	< 9.1 U	< 9.1 U	210	< 9.1 U	16	< 9.1 U	8.7	100	2.8 J	< 9.1 U	
	9/22/2006	< 5 UJ	3.7 J	< 5 UJ	< 5 UJ	120 J	< 5 UJ	21 J	< 5 UJ	5.7 J	98 J	< 5 UJ	< 10 UJ	
	11/17/2009	2.5	5.7	0.74 J	< 2.5 U	150	< 2.5 U	28 J	< 2.5 U	6.2	180	1.0 J	< 5.0 U	
	9/24/2010	< 8.0 U	6.8 J	< 8.0 U	< 8.0 U	220	< 8.0 U	26	< 8.0 U	8.1	170	< 8.0 U	< 16 U	
GM-44	8/19/2004	4 J	3.3 J	< 6 U	< 6 U	130	< 6 U	57	< 6 U	4.4	140	< 6 U	< 6 U	
	4/9/2010	1.8 J	2.5 J	0.70 J	< 3.3 U	48	< 3.3 U	70	< 3.3 U	4.4	110	< 3.3 U	< 6.7 U	
GM-45	9/22/2006	3.5 J	3.1 J	< 8 UJ	< 8 UJ	54 J	< 8 UJ	230 J	< 8 UJ	2.7 J	230 J	< 8 UJ	< 16 UJ	
	4/9/2010	2.7 J	2.5 J	< 5.7 U	< 5.7 U	36	< 5.7 U	200	< 5.7 U	3.3 J	180	< 5.7 U	< 11 U	
HR-16	9/23/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	2.7	<1.0	<1.0	
	9/18/2002	< 1.0	< 1.0	< 1.0	< 1.0	0.46J	< 1.0	< 1.0	< 1.0	< 0.50	1.5	< 1.0	< 1.0	
	1/21/2008	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	1.3	< 1 U	< 2 U	
HR-17	9/23/1999	<1.0	<1.0	<1.0	<1.0	6.2	<1.0	15.5	<1.0	<1.0	7.4	<1.0	<1.0	
	9/28/2000	1.9	<1.0	<1.0	<1.0	<1.0	<1.0	3.7	<1.0	<1.0	4.4	<1.0	<1.0	
	11/8/2001	1.4	< 1.0	< 1.0	< 1.0	< 0.50	< 1.0	3.3	< 1.0	< 0.50	4.2B	< 1.0	< 1.0	
	9/18/2002	0.39J	1.5	< 1.0	< 1.0	5.1	< 1.0	22	< 1.0	1.4	12	< 1.0	< 1.0	
	9/25/2003	< 2 U	0.75 J	< 2 U	< 2 U	2.2	< 2 U	64	< 2 U	0.7 J	10	< 2 U	< 2 U	
	9/17/2004	< 5 U	2 J	< 5 U	< 5 U	7.1	< 5 U	82	< 5 U	1.6 J	18	< 5 U	< 5 U	
	10/19/2005	< 1.8 U	0.70 J	< 1.8 U	< 1.8 U	3.1	< 1.8 U	45	< 1.8 U	0.57 J	8.3	< 1.8 U	< 3.7 U	
	9/18/2006	< 1 U	0.6 J	< 1 U	< 1 U	4.6	< 1 U	34	< 1 U	0.46 J	5.6	< 1 U	< 2 U	
	9/25/2007	< 2.5 U	1.2 J	< 2.5 U	< 2.5 U	1.9 J	< 2.5 U	51	< 2.5 U	0.69 J	16	< 2.5 U	< 5 U	
	9/26/2008	< 4 U	1.1 J	< 4 U	< 4 U	2.7 J	< 4 U	120	< 4 U	1 J	31	< 4 U	< 8 U	
	11/12/2009	< 2.5 U	1.7 J	< 2.5 U	< 2.5 U	1.9 J	< 2.5 U	85	< 2.5 U	1.3 J	21	< 2.5 U	< 5.0 U	
	9/23/2010	< 1.7 U	1.9	< 1.7 U	< 1.7 U	2.2	< 1.7 U	60	< 1.7 U	1.2 J	18	< 1.7 U	< 3.3 U	
W-2-S	9/23/1999	1.9J	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	6.1	<1.0	<1.0	
	9/27/2000	1.6	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	5.0	<1.0	<1.0	
	11/8/2001	1.7	0.58J	< 1.0	< 1.0	0.49J	< 1.0	< 1.0	< 1.0	< 0.50	5.2B	< 1.0	< 1.0	
	9/18/2002	1.5	0.98J	< 1.0	< 1.0	0.90	< 1.0	< 1.0	< 1.0	< 0.50	4.9	< 1.0	< 1.0	
	9/26/2003	1.4	0.99 J	< 1 U	< 1 U	0.74	< 1 U	< 1 U	0.25 J	< 0.5 U	5.5	< 1 U	< 1 U	
	9/17/2004	1.5	1.3	< 1 U	< 1 U	1.1	< 1 U	0.55 J	< 1 U	< 0.5 U	6.0	< 1 U	< 1 U	
	10/19/2005	1.6	1.2	< 1.0 U	< 1.0 U	0.78 J	< 1.0 U	0.36 J	< 1.0 U	< 1.0 U	5.4	< 1.0 U	< 2.0 U	
	9/18/2006	1.8	1.2	< 1 U	< 1 U	1.2	< 1 U	< 1 U	< 1 U	< 1 U	5.1	< 1 U	< 2 U	
	9/24/2007	1.4	1.1	< 1 U	< 1 U	0.89 J	< 1 U	< 1 U	< 1 U	< 1 U	5.3	< 1 U	< 2 U	
	9/25/2008	1.4	0.92 J	< 1 U	< 1 U	0.78 J	< 1 U	< 1 U	< 1 U	< 1 U	5.2	< 1 U	< 2 U	
	11/12/2009	1.7	1.2	< 1.0 U	0.43 J	0.9 J	< 1.0 UJ	0.35 J	< 1.0 U	< 1.0 U	6.6	< 1.0 U	< 2.0 U	
	9/24/2010	1.4	1.1	< 1.0 U	< 1.0 U	0.82 J	< 1.0 U	0.33 J	< 1.0 U	< 1.0 U	5.9	< 1.0 U	< 2.0 U	

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethylbenzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes (total)
W-3-S	9/23/1999	3.9	<1.0	<1.0	<1.0	<1.0	<1.0	1.1	<1.0	<1.0	2.6	<1.0	<1.0
	9/28/2000	2.8	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	2.5	<1.0	<1.0
	11/8/2001	1.6	< 1.0	< 1.0	< 1.0	< 0.50	< 1.0	0.44J	< 1.0	< 0.50	1.5B	< 1.0	< 1.0
	9/18/2002	2.1	< 1.0	< 1.0	< 1.0	< 0.50	< 1.0	0.61J	< 1.0	< 0.50	2.4	< 1.0	< 1.0
	9/26/2003	1.8	< 1 U	< 1 U	< 1 U	0.34 J	< 1 U	0.81 J	< 1 U	< 0.5 U	2.0	< 1 U	< 1 U
	9/17/2004	2.4	0.21 J	< 1 U	< 1 U	< 0.5 U	< 1 U	1.2	< 1 U	< 0.5 U	2.9	< 1 U	< 1 U
	10/19/2005	2.5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	1.0	< 1.0 U	< 1.0 U	2.9	< 1.0 U	< 2.0 U
	9/18/2006	2.5	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	0.6 J	< 1 U	< 1 U	3.4	< 1 U	< 2 U
	9/24/2007	1.4	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	0.72 J	< 1 U	< 1 U	2.0	< 1 U	< 2 U
	9/26/2008	1.2	0.21 J	< 1 U	< 1 U	0.52 J	< 1 U	1.3	< 1 U	< 1 U	2.1	< 1 U	< 2 U
	11/12/2009	1.2	< 1.0 U	< 1.0 U	< 1.0 U	0.33 J	< 1.0 UJ	0.87 J	< 1.0 U	< 1.0 U	2.5	< 1.0 U	< 2.0 U
	9/23/2010	0.87 J	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.95 J	< 1.0 U	< 1.0 U	2.3	< 1.0 U	< 2.0 U
W-4-S	9/23/1999	3.3	1.2	<1.0	<1.0	4.4	<1.0	30.5J	<1.0	<1.0	14.7J	<1.0	<1.0
	9/28/2000	3.0	1.0	<1.0	<1.0	4.0	<1.0	15.4	<1.0	<1.0	11.3	<1.0	<1.0
	11/8/2001	2.9	1.1	< 1.0	< 1.0	3.3	< 1.0	13	< 1.0	0.43J	8.9B	< 1.0	< 1.0
	9/18/2002	2.3	0.87J	< 1.0	< 1.0	3.6	< 1.0	17	< 1.0	0.60	9.8	< 1.0	< 1.0
	9/26/2003	2	0.92 J	< 1 U	< 1 U	3.6	< 1 U	24	0.25 J	0.78	13	< 1 U	< 1 U
	9/17/2004	2.3	1.2	< 1 U	< 1 U	4.4	< 1 U	18	< 1 U	0.97	13	< 1 U	< 1 U
	10/19/2005	2.4	1.4	< 1.0 U	< 1.0 U	4.3	< 1.0 U	20	< 1.0 U	1.1	13	< 1.0 U	< 2.0 U
	9/19/2006	1.7	1.3	< 1 U	< 1 U	4.3	< 1 U	18	< 1 U	1	12	< 1 U	< 2 U
	9/24/2007	1.5	1.8	< 1 U	< 1 U	5.9	< 1 U	26	< 1 U	1.3	16	< 1 U	< 2 U
	9/26/2008	0.95 J	1.3	0.21 J	< 1 U	6	< 1 U	32	< 1 U	1.2	16	< 1 U	< 2 U
	11/12/2009	1.3	1.6	< 1.0 U	< 1.0 U	9.1	< 1.0 U	39	< 1.0 U	1.5	23	< 1.0 U	< 2.0 U
	9/23/2010	1.1	1.6	< 1.0 U	< 1.0 U	9.1	< 1.0 U	31	< 1.0 U	1.5	20	< 1.0 U	< 2.0 U
GM-19S	9/20/1999	16.0	7.7	1.0	<1.0	34.6	<1.0	46.0	<1.0	2.3	71.1	<1.0	<1.0
	9/22/2000	14.5	4.4	<1.0	<1.0	37.6	<1.0	68.0	<1.0	2.6	104	<1.0	<1.0
	11/12/2001	7.6	2.9J	< 3.3	< 3.3	26	< 3.3	64	< 3.3	2.0	97	< 3.3	< 3.3
	9/26/2002	6.3	6.3	< 4	< 4	39	< 4	52	< 4	2.7	110	5.2	< 4
	9/25/2003	13	8.3	1.6 J	< 5 U	89	< 5 U	62	< 5 U	2.9	140	< 5 U	< 5 U
	9/13/2004	14	8.1	1.9 J	< 4 U	61	< 4 U	71	< 4 U	2.4	120	< 4 U	< 4 U
	10/18/2005	13	9.0	1.2 J	< 1.7 U	29	< 1.7 U	95	< 1.7 U	1.0 J	140	1.8	< 3.3 U
	9/21/2006	9.7 J	7 J	< 22 U	< 22 U	660	< 22 U	9.1 J	< 22 U	10 J	11 J	< 22 U	< 44 U
	9/17/2007	0.59 J	10	< 1 U	< 1 U	0.3 J	< 1 U	1.5	< 1 U	0.29 J	0.46 J	< 1 U	< 2 U
	9/23/2008	< 1 U	13	< 1 U	< 1 U	0.68 J	< 1 U	0.94 J	< 1 U	0.52 J	3	9.3	< 2 U
	11/17/2009	< 1.0 U	12	< 1.0 U	< 1.0 U	0.27 J	< 1.0 U	< 1.0 U	< 1.0 U	0.37 J	0.22 J	< 1.0 U	< 2.0 U
	4/7/2010	< 1.0 U	9.6	< 1.0 U	< 1.0 U	0.27 J	< 1.0 U	< 1.0 U	< 1.0 U	0.45 J	< 1.0 U	< 1.0 U	< 2.0 U
9/27/2010	< 1.0 U	9.5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.46 J	< 1.0 U	< 1.0 U	< 2.0 U	
EAST	9/21/1999	21.0	5.4	<1.0	<1.0	9.1	<1.0	61.0	<1.0	<1.0	56.1	<1.0	<1.0
	9/22/2000	22.2	7.7	1.2	<1.0	77.3	<1.0	55.8	<1.0	1.8	97.2	3.0	<1.0
	11/12/2001	13	6.2	0.90J	< 3.3	51	< 3.3	56	< 3.3	2.7	92	1.5J	< 3.3
	9/23/2002	10	3.9	0.73J	< 2	8.8	< 2	49	< 2	< 1	46	< 2	< 2
	9/25/2003	7.1	2.3	< 2 U	< 2 U	4.3	< 2 U	47	< 2 U	< 1 U	35	< 2 U	< 2 U
	9/13/2004	5.7	0.72 J	0.34 J	< 1 U	1.6	< 1 U	40	< 1 U	< 0.5 U	23	< 1 U	< 1 U
	10/18/2005	5.9	3.0	< 1.0 U	< 1.0 U	3.1	< 1.0 U	47	< 1.0 U	< 1.0 U	23	1.2	< 2.0 U
	9/21/2006	10	3.2	0.59 J	< 1.4 U	4.1	< 1.4 U	41	< 1.4 U	< 1.4 U	29	< 1.4 U	< 2.9 U
WEST	9/21/1999	24.8	25.6	<1.0	<1.0	125	<1.0	41.3	<1.0	<1.0	37.3	<1.0	<1.0
GM-33	9/25/2003	21	8.4	1 J	< 2.5 U	19	< 2.5 U	37	< 2.5 U	0.72 J	75	< 2.5 U	< 2.5 U
	9/13/2004	17	5.4	1.1 J	< 2 U	9.5	< 2 U	37	< 2 U	0.45 J	55	< 2 U	< 2 U
	10/18/2005	18	6.4	0.69 J	< 1.0 U	7.4	< 1.0 U	50	< 1.0 U	0.36 J	71	1.0	< 2.0 U
	9/21/2006	18	4.5	1.1 J	< 1.7 U	6.9	< 1.7 U	37	< 1.7 U	0.44 J	64	< 1.7 U	< 3.3 U
	9/24/2007	15	4.9	0.68 J	< 1.7 U	5.5	< 1.7 U	32	< 1.7 U	0.34 J	49	< 1.7 U	< 3.3 U
	10/23/2008	8.4	2.9	0.58 J	< 1.4 U	4.1	< 1.4 U	38	< 1.4 U	< 1.4 U	36	< 1.4 U	< 2.9 U

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethylbenzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes (total)
GM-35	9/25/2003	17	46	4 J	< 8 U	300	< 8 U	21	< 8 U	12	270	59	< 8 U
	9/13/2004	17	36	4.1 J	< 11 U	270	< 11 U	21	< 11 U	9.1	230	50	< 11 U
	10/18/2005	12	36	1.8 J	< 5.0 U	190	< 5.0 U	29	< 5.0 U	9.3	240	23	< 10 U
	9/22/2006	5.5 J	26 J	< 5 UJ	< 5 UJ	160 J	< 5 UJ	14 J	< 5 UJ	11 J	130 J	13 J	< 10 UJ
	9/24/2007	5.8 J	26	< 10 U	< 10 U	140	< 10 U	22	< 10 U	8 J	110	12	< 20 U
	9/29/2008	4.6 J	20	< 10 U	< 10 U	92	< 10 U	20	< 10 U	9.4 J	88	7.9 J	< 20 U
	11/13/2009	4.7	17	1.0 J	< 3.3 U	74	< 3.3 U	33	< 3.3 U	8.2	120	4.6	< 6.7 U
	9/27/2010	4.8	19	0.97 J	< 4.0 U	73	< 4.0 U	37	< 4.0 U	8.9	120	4.3	< 8.0 U
GM-32	9/22/1999	<1.0	3.3	<1.0	<1.0	2.6	<1.0	1.2	1.0	4.2	3.2	3.0	<1.0
	9/25/2000	<1.0	35.9	<1.0	<1.0	<1.0	<1.0	<1.0	10.4	20.3	<1.0	<1.0	<1.0
	11/12/2001	< 5.0	6.2	< 5.0	4.3J	< 2.5	0.79J	< 5.0	12	2.9	< 5.0	1.1J	3.0J
	9/20/2002	< 10	9.7J	< 10	< 10	< 5	< 10	< 10	< 10	< 5	< 10	< 10	< 10
	10/1/2003	< 2 U	5.5	< 2 U	1.5 J	< 1 U	< 2 U	< 2 U	< 2 U	1	< 2 U	< 2 U	< 2 U
	9/14/2004	< 10 U	3 J	< 10 U	< 10 U	< 5 U	< 10 U	< 10 U	< 10 U	< 5 U	< 10 U	< 10 U	< 10 U
	10/19/2005	< 10 U	4.9 J	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 20 U
	9/19/2006	< 10 U	3.7 J	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 20 U
	9/18/2007	< 5 U	4.3 J	< 5 U	1.6 J	< 5 U	< 5 U	< 5 U	< 5 U	1 J	< 5 U	< 5 U	3.4 J
	9/23/2008	< 10 U	4 J	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 20 U
GM-22	9/1/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	3.6	<1.0	<1.0	4.0	<1.0	<1.0
	9/21/2000	<1.0	2.4	<1.0	<1.0	1.9	<1.0	1.6	<1.0	<1.0	<1.0	<1.0	<1.0
	11/13/2001	4.4	6.8	0.58J	< 1.0	8.5	< 1.0	4.9	< 1.0	0.17J	7.5	0.60J	< 1.0
	9/25/2002	0.93J	< 2	< 2	< 2	< 1	< 2	2.3	< 2	< 1	7.6	< 2	< 2
	9/24/2003	1.2	1	< 1 U	< 1 U	0.45 J	< 1 U	2.9	< 1 U	< 0.5 U	7.6	< 1 U	< 1 U
	9/14/2004	1.7	2.1	< 1 U	< 1 U	0.9	< 1 U	2.9	< 1 U	< 0.5 U	10	< 1 U	< 1 U
	10/17/2005	0.96 J	1.0	< 1.0 U	< 1.0 U	0.36 J	< 1.0 U	3.6	< 1.0 U	< 1.0 U	4.7	< 1.0 U	< 2.0 U
	9/20/2006	0.47 J	1.1	< 1 U	< 1 U	0.28 J	< 1 U	3.2	< 1 U	< 1 U	3	< 1 U	< 2 U
	9/26/2007	0.66 J	0.72 J	< 1 U	< 1 U	0.24 J	< 1 U	3.3	< 1 U	< 1 U	3.3	< 1 U	< 2 U
	10/3/2008	0.73 J	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	5.7	< 1 U	< 1 U	5.7	< 1 U	< 2 U
GM-21	9/22/1999	53.1	9.0	3.9	<1.0	66.4	<1.0	<1.0	<1.0	7.8	28.7	<1.0	<1.0
	9/22/2000	15.7	5.6	1.6	<1.0	38.7	<1.0	<1.0	<1.0	12.9	189	<1.0	<1.0
	11/13/2001	6.9	3.8J	< 5.0	< 5.0	39	< 5.0	< 5.0	< 5.0	15	160	< 5.0	< 5.0
	9/25/2002	31	5J	2.6J	< 6.7	43	< 6.7	< 6.7	< 6.7	5.1	230	< 6.7	< 6.7
	9/24/2003	31	6.9 J	2 J	< 8 U	100	< 8 U	< 8 U	< 8 U	2.9 J	200	< 8 U	< 8 U
	9/14/2004	26	4.2 J	3.1 J	< 9.1 U	56	< 9.1 U	< 9.1 U	< 9.1 U	7.9	180	< 9.1 U	< 9.1 U
	10/17/2005	4.3	3.4	< 1.0 U	< 1.0 U	20	< 1.0 U	< 1.0 U	< 1.0 U	22	1.8	13	< 2.0 U
	9/20/2006	12	8.6	0.19 J	< 1 U	14	< 1 U	< 1 U	< 1 U	4.3	5.9	9.3	< 2 U
	9/26/2007	8.5	18	< 1.4 U	< 1.4 U	26	< 1.4 U	< 1.4 U	< 1.4 U	2.5	2.8	12	< 2.9 U
	10/3/2008	8.7	15	0.33 J	< 1.4 U	38	< 1.4 U	0.56 J	< 1.4 U	4.7	18	19	< 2.9 U
	11/16/2009	2.4	22	< 1.0 U	< 1.0 U	7.8	< 1.0 U	< 1.0 U	< 1.0 U	4.4	2.4	6.6	< 2.0 U
	9/28/2010	0.75 J	20	< 1.0 U	< 1.0 U	3.9	< 1.0 U	< 1.0 U	< 1.0 U	3.0	3.2	3.6	< 2.0 U
GM-8	9/20/1999	1.9	30.2	<1.0	3.4	26.2	20.7	14.8	<1.0	12.0	30.4	8.4	2.3
	9/26/2000	<1.0	36.5	<1.0	1.1	1.5	12.5	<1.0	<1.0	5.4	6.6	2.4	1.9
	11/9/2001	0.40J	40	< 1.0	0.78J	2.0	0.40J	< 1.0	< 1.0	3.6	4.4	1.9	0.39J
	9/20/2002	< 2	63	< 2	5.5	5.5	7.5	< 2	1.8J	9	< 2	5.8	1.5J
	10/1/2003	< 2 U	48	< 2 U	5.4	< 1 U	11	< 2 U	< 2 U	4.4	< 2 U	< 2 U	< 2 U
	9/14/2004	< 1 U	15	< 1 U	4.2	< 0.5 U	19	< 1 U	< 1 U	1.1	< 1 U	0.48 J	1.1
	10/19/2005	< 1.0 U	16	< 1.0 U	3.5	0.24 J	29	< 1.0 U	0.39 J	0.99 J	< 1.0 U	0.73 J	< 2.0 U
	9/19/2006	< 5 U	18	< 5 U	2.1 J	2.1 J	< 5 U	< 5 U	< 5 U	1 J	< 5 U	3.2 J	< 10 U
	9/18/2007	< 2 U	9.1	< 2 U	2.4	< 2 U	1.7 J	< 2 U	< 2 U	0.9 J	< 2 U	< 2 U	0.9 J
	9/23/2008	< 1 U	1.7	< 1 U	6.8	< 1 U	8.6	< 1 U	< 1 U	0.27 J	< 1 U	0.48 J	3.9
	11/16/2009	<1.0 U	2.9	<1.0 U	3.9	<1.0 U	5.5	0.34 J	0.13 J	0.22 J	<1.0 U	<1.0 U	1.3 J
	9/27/2010	< 1.0 U	3.0	< 1 U	4.7	< 1.0 U	0.33 J	< 1.0 U	0.18 J	0.29 J	< 1.0 U	0.44 J	< 2.0 U

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethylbenzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes (total)
GM-6	9/20/1999	24.6	33.2	1.2	<1.0	52.9	<10	81.4	<1.0	2.0	78.2	1.6	<10
	9/26/2000	12.1	13.0	<1.0	<1.0	41.0	<1.0	51.5	<1.0	2.2	56.6	3.7	<1.0
	11/9/2001	3.9	14	<2.0	<2.0	8.2	<2.0	14	<2.0	1.8	48	1.9J	<2.0
	9/20/2002	1.4J	60	<2	2.2	43	<2	14	<2	8.6	33	12	<2
	10/2/2003	0.19 J	20	<1 U	1	13	0.22 J	11	<1 U	2.5	23	3.3	<1 U
	9/14/2004	<1 U	18	<1 U	1.7	10	<1 U	2.6	<1 U	1.9	5.7	3	<1 U
	10/19/2005	<1.0 U	21	<1.0 U	0.49 J	20	<1.0 U	0.34 J	<1.0 U	2.1	1.4	11	<2.0 U
	9/19/2006	<1 U	16	<1 U	<1 U	18	<1 U	<1 U	<1 U	1.6	0.35 J	7.3	<2 U
	9/18/2007	<1 U	26	<1 U	0.42 J	16	<1 U	<1 U	<1 U	2.6	0.34 J	6.7	<2 U
	9/24/2008	<1 U	<8.4 U	<1 U	1.2	6.7	<1 U	<1 U	<1 U	1.3	<1 U	2.1	<2 U
	11/11/2009	<1.0 U	6.9	<1.0 U	1.3	3.4	<1.0 U	<1.0 U	<1.0 U	0.68 J	3.8	1.2	<2.0 U
	9/27/2010	<1.0 U	6.2	<1 U	1.1	4.9	<1.0 U	0.38 J	<1.0 U	0.89 J	6.6	1.6	<2.0 U
GM-53	9/14/2006	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<2.0 U
GM-59	9/15/2006	<14 U	<14 U	<14 U	<14 U	4 J	<14 U	310	<14 U	<14 U	94	<14 U	<29 U
	10/3/2008	<33 U	<33 U	<33 U	<33 U	41	<33 U	750	<33 U	<33 U	750	<33 U	<67 U
	11/17/2009	<6.7 U	<6.7 U	<6.7 U	<6.7 U	3.3 J	<6.7 U	500 J	<6.7 U	<6.7 U	170	<6.7 U	<13 U
	4/8/2010	<8.0 U	<8.0 U	<8.0 U	<8.0 U	2.9 J	<8.0 U	280	<8.0 U	<8.0 U	69	<8.0 U	<16 U
	9/29/2010	<15 U	<15 U	<15 U	<15 U	5.7 J	<15 U	520	<15 U	<15 U	350	<15 U	<31 U
GM-60	9/15/2006	<25 U	<25 U	<25 U	<25 U	220	<25 U	510	<25 U	<25 U	570	<25 U	<50 U
	10/3/2008	<25 U	<25 U	<25 U	<25 U	360	<25 U	900	<25 U	<25 U	920	<25 U	<50 U
	11/17/2009	<20 U	<20 U	<20 U	<20 U	160	<20 U	1100 J	<20 U	<20 U	1400	<20 U	<40 U
	4/8/2010	<22 U	<22 U	<22 U	<22 U	17 J	<22 U	820	<22 U	<22 U	740	<22 U	<44 U
	9/29/2010	<40 U	<40 U	<40 U	<40 U	940	<40 U	970	<40 U	10 J	1300	18 J	<80 U
GM-66	5/2/2007	<2.9 U	8.3	<2.9 U	<2.9 U	84	<2.9 U	<2.9 U	<2.9 U	3.3	31	4.1	<5.7 U
GM-67S	5/3/2007	<5.7 U	2.8 J	<5.7 U	<5.7 U	5.2 J	<5.7 U	1.1 J	<5.7 U	<5.7 U	140	<5.7 U	<11 U
GM-68S	5/4/2007	0.62 J	<2.5 U	<2.5 U	<2.5 U	<2.5 U	<2.5 U	28	<2.5 U	<2.5 U	78	<2.5 U	<5 U
GM-71	5/3/2007	<2 U	<2 U	<2 U	<2 U	<2 U	<2 U	62	<2 U	<2 U	11	<2 U	<4 U
GM-72	5/3/2007	<1.7 U	<1.7 U	<1.7 U	<1.7 U	<1.7 U	<1.7 U	53	<1.7 U	<1.7 U	0.66 J	<1.7 U	<3.3 U
GM-74S	9/27/2007	<4 U	<4 U	<4 U	<4 U	<4 U	<4 U	140	<4 U	<4 U	83	<4 U	<8 U
	4/9/2010	<5.7 U	<5.7 U	<5.7 U	<5.7 U	<5.7 U	<5.7 U	200	<5.7 U	<5.7 U	44	<5.7 U	<11 U
GM-75S	9/26/2007	<14 U	<14 U	<14 U	<14 U	<14 U	<14 U	490	<14 U	<14 U	210	<14 U	<29 U
	10/6/2008	<20 U	<20 U	<20 U	<20 U	<20 U	<20 U	690	<20 U	<20 U	250	<20 U	<40 U
	11/16/2009	<10 U	<10 U	<10 U	<10 U	4.9 J	<10 U	640	<10 U	<10 U	260	<10 U	<20 U
	9/29/2010	<29 U	<29 U	<29 U	<29 U	14 J	<29 U	650	<29 U	<29 U	890	<29 U	<57 U
GM-76S	9/23/2007	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	1.2	<1 U	<1 U	1.6	<1 U	<2 U
GM-83S	2/26/2008	<1 U	<1 U	<1 U	<1 U	2.9	<1 U	<1 U	0.18 J	0.3 J	<1 U	<1 U	<2 U
Downgradient of the Site													
TW-2	9/26/2000	4.5	27.8	<1.0	<1.0	22.5	10.4	5.0	<1.0	2.9	43.1	5.9	3.2
	11/9/2001	3.9	20	<2.0	<2.0	8.8	0.38J	8.5	<2.0	2.4	48	2.7	<2.0
	9/20/2002	2.2	9	<2	<2	26	<2	5.9	<2	1.4	70	2.5	<2
	10/2/2003	0.66 J	5.7	<1 U	1.5	8.3	0.86 J	4.7	<1 U	0.59	24	1.4	<1 U
	9/14/2004	<1 U	22	<1 U	2.9	5.5	<1 U	<1 U	<1 U	2	1.5	2.5	<1 U
	10/20/2005	<1.0 U	12	<1.0 U	2.5	5.3	12	<1.0 U	3.4	1.4	<1.0 U	4.4	5.0
	9/19/2006	0.55 J	3.4	<1 U	<1 U	11	<1 U	7	<1 U	0.38 J	32	0.27 J	<2 U
	9/18/2007	<1 U	1.7	<1 U	0.81 J	7.9	<1 U	1.9	<1 U	0.25 J	24	0.97 J	<2 U
	9/24/2008	<1 U	<1.9 U	<1 U	1.4	<5.2 U	0.76 J	1.4	<1 U	0.36 J	7.5	1	<2 U
	11/11/2009	<2.5 U	1.1 J	<2.5 U	<2.5 U	1.6 J	<2.5 U	<2.5 U	<2.5 U	<2.5 U	1.1 J	<2.5 U	<5.0 U
	9/28/2010	<1.0 U	2.0	<1.0 U	1.2	2.1	<1.0 U	0.52 J	<1.0 U	0.30 J	1.6	0.71 J	<2.0 U
4S	9/20/1999	<1.0	1.6	<1.0	1.6	<1.0	<10	<1.0	<1.0	<1.0	<1.0	<1.0	<10
	10/2/2003	<2 U	7	<2 U	1.6 J	<1 U	1.7 J	<2 U	<2 U	1.7	<2 U	<2 U	<2 U
	9/14/2004	<5 U	7.5	<5 U	4.5 J	<2.5 U	4.7 J	<5 U	1.1 J	<2.5 U	<5 U	<5 U	2.4 J
	10/19/2005	<4.0 U	2.3 J	<4.0 U	1.6 J	<4.0 U	1.6 J	<4.0 U	<4.0 U	0.95 J	<4.0 U	<4.0 U	<8.0 U
	9/20/2006	<1 U	5.6	<1 U	0.7 J	0.25 J	0.52 J	<1 U	<1 U	0.75 J	<1 U	<1 U	<2 U

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											Vinyl Chloride	Xylenes (total)
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethylbenzene	PCE	Toluene	trans-1,2-DCE	TCE			
GM-2	9/20/1999	5.5	1.4	<1.0	<1.0	8.4	<10	6.0	<1.0	<1.0	61.6	<1.0	<10	
	9/25/2000	5.7	3.7	<1.0	<1.0	39.2	<1.0	7.7	<1.0	1.3	82.8	1.7	<1.0	
	11/9/2001	6.1	6.1	<3.3	<3.3	26	<3.3	8.4	<3.3	1.1J	65	<3.3	<3.3	
	9/20/2002	0.75J	3.4	<1	<1	7.6	<1	8.7	<1	0.37J	26	<1	<1	
	10/2/2003	0.21 J	1.7	<1 U	<1 U	4.7	0.21 J	5.7	<1 U	<0.5 U	13	0.46 J	<1 U	
	9/14/2004	<1 U	1.6	<1 U	<1 U	5.6	<1 U	4	<1 U	0.23 J	6.2	<1 U	<1 U	
	10/19/2005	<1.0 U	2.0	<1.0 U	<1.0 U	6.8	<1.0 U	3.6	<1.0 U	0.26 J	4.6	0.24 J	<2.0 U	
	9/20/2006	<1 U	2.1	<1 U	<1 U	7.7	<1 U	2.6	<1 U	0.34 J	5.1	0.61 J	<2 U	
	9/18/2007	<1 U	1.4	<1 U	<1 U	4.9	<1 U	1.6	<1 U	0.28 J	2.3	1.1	<2 U	
	9/24/2008	<1 U	<1.1 U	<1 U	<1 U	6.7	<1 U	1.3	<1 U	0.19 J	2.4	<1 U	<2 U	
	11/11/2009	<1.0 U	1	<1.0 U	<1.0 U	3.2	<1.0 U	0.90 J	<1.0 U	<1.0 U	1.4	2.3	<2.0 U	
	9/27/2010	<1.0 U	1.2	<1 U	<1.0 U	3.8	<1.0 U	0.44 J	<1.0 U	<1.0 U	0.95 J	2.5	<2.0 U	
GM-16	9/21/1999	2.2	<1.0	<1.0	<1.0	1.7	<1.0	44.1	<1.0	<1.0	8.5	<1.0	<1.0	
	9/26/2000	2.5	<1.0	<1.0	<1.0	<1.0	<1.0	16.2	<1.0	<1.0	3.5	<1.0	<1.0	
	11/8/2001	2.2	0.31J	<1.0	<1.0	0.39J	<1.0	17	<1.0	<0.50	3.6	<1.0	<1.0	
	9/24/2002	1.4J	4.1	<2	<2	6.2	<2	63	<2	1.6	28	<2	<2	
	9/22/2003	1.9 J	2.8 J	<4 U	<4 U	5.8	<4 U	110	<4 U	1.1 J	57	<4 U	<4 U	
	9/16/2004	3.1 J	4.3	<3.3 U	<3.3 U	7.4	<3.3 U	130	<3.3 U	1 J	90	<3.3 U	<3.3 U	
	10/19/2005	1.7 J	1.1 J	<3.3 U	<3.3 U	2.8 J	<3.3 U	100	<3.3 U	0.90 J	55	<3.3 U	<6.7 U	
	9/18/2006	2.1	1.1 J	<1.4 U	<1.4 U	3.8	<1.4 U	98	<1.4 U	1 J	51	<1.4 U	<2.9 U	
	9/25/2007	1.4 J	1.5 J	<4 U	<4 U	43	<4 U	94	<4 U	1.3 J	52	<4 U	<8 U	
	9/30/2008	1.8 J	3.8	<3.3 U	<3.3 U	20	<3.3 U	100	<3.3 U	1.1 J	48	<3.3 U	<6.7 U	
	11/16/2009	1.4 J	1.6 J	<3.3 U	<3.3 U	12	<3.3 U	110	<3.3 U	1.5 J	74	<3.3 U	<6.7 U	
	9/23/2010	1.1 J	1.3 J	<4.0 U	<4.0 U	2.2 J	<4.0 U	110	<4.0 U	1.2 J	75	<4.0 U	<8.0 U	
GM-17	9/21/1999	6.4	26.4	<1.0	<1.0	30.0	<1.0	<1.0	<1.0	2.6	28.7	1.4	<1.0	
	9/27/2000	6.7	23.9	<1.0	<1.0	41.6	<1.0	24.6	<1.0	2.5	48.4	<1.0	<1.0	
	11/8/2001	6.8	7.3	<3.3	<3.3	16	<3.3	48	<3.3	1.8	79	<3.3	<3.3	
	9/19/2002	2.3	6.0	<1.2	<1.2	13	<1.2	22	<1.2	0.67	39	0.79J	<1.2	
	9/24/2003	1.3	1.2	<1 U	<1 U	2.9	<1 U	12	<1 U	<0.5 U	24	<1 U	<1 U	
	9/15/2004	1.1	4	<1 U	<1 U	11	<1 U	3.6	<1 U	0.64	22	0.49 J	<1 U	
	10/20/2005	1.4	5.5	<1.0 U	<1.0 U	9.0	<1.0 U	8.1	<1.0 U	0.57 J	29	2.0	<2.0 U	
	9/27/2006	0.46 J	3.2	<1 U	<1 U	9.5	<1 U	11	<1 U	0.49 J	24	0.54 J	<2 U	
	9/18/2007	0.31 J	1.5	<1 U	<1 U	4	<1 U	7.3	<1 U	0.22 J	15	<1 U	<2 U	
	9/24/2008	0.29 J	<1 U	<1 U	<1 U	<1.9 U	<1 U	4.8	<1 U	<1 U	10	<1 U	<2 U	
GM-18	9/22/1999	42.6	22.6	1.3	<1.0	35.3	<1.0	4.9	<1.0	2.2	131	<1.0	<1.0	
	9/27/2000	31.8	10.4	<1.0	<1.0	23.9	<1.0	7.8	<1.0	1.8	115	<1.0	<1.0	
	11/8/2001	23	3.3	1.3J	<3.3	14	<3.3	12	<3.3	1.6J	93	<3.3	<3.3	
	9/19/2002	18	6.0	<3.3	<3.3	15	<3.3	28	<3.3	1.6J	98	<3.3	<3.3	
	9/22/2003	10	3.7	<2 U	<2 U	8.8	<2 U	24	<2 U	<1 U	77	0.75 J	<2 U	
	9/15/2004	5.2	2.2	0.46 J	<2 U	5.9	<2 U	20	<2 U	<1 U	53	<2 U	<2 U	
	10/20/2005	7.0	15	0.30 J	<1.0 U	14	<1.0 U	21	<1.0 U	1.2	70 J	3.0	<2.0 U	
	9/27/2006	6.2	17	<2.9 U	<2.9 U	21	<2.9 U	15	<2.9 U	2 J	72	2.5 J	<5.7 U	
	9/19/2007	5.4	13	<2.5 U	<2.5 U	19	<2.5 U	14	<2.5 U	1.2 J	64	1.1 J	<5 U	
	9/24/2008	2.3	<6.1 U	<1.4 U	<1.4 U	13	<1.4 U	16	<1.4 U	0.79 J	38	<1.4 U	<2.9 U	
WSU-22	3/1/2006	3.1	1.7	<1.7 U	<1.7 U	4.3	<1.7 U	110	<1.7 U	1.2 J	88	<1.7 U	<3.3 U	
WSU-23	3/1/2006	2.5	0.97 J	<1 U	<1 U	0.44 J	<1 U	<1 U	<1 U	<1 U	7.1	<1 U	<2 U	
	11/30/2006	2.1	0.73 J	0.2 J	<1 U	0.46 J	<1 U	<1 U	<1 U	<1 U	6.1	<1 U	<2 U	

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											Vinyl Chloride	Xylenes (total)
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethylbenzene	PCE	Toluene	trans-1,2-DCE	TCE			
WSU-24	9/23/1999	2.4	<1.0	<1.0	<1.0	<1.0	<1.0	1.9	<1.0	<1.0	17.0	<1.0	<1.0	
	9/26/2000	2.1	<1.0	<1.0	<1.0	2.7	<1.0	1.2	<1.0	<1.0	16.8	<1.0	<1.0	
	11/9/2001	2.4	0.81J	<1.0	<1.0	4.0	<1.0	1.6	<1.0	<0.50	18	<1.0	<1.0	
	9/24/2002	1.4	<1	<1	<1	<0.5	<1	1.2	<1	<0.5	13	<1	<1	
	9/22/2003	0.67 J	<1 U	<1 U	<1 U	<0.5 U	<1 U	1	<1 U	<0.5 U	7.9	<1 U	<1 U	
	9/16/2004	0.58 J	<1 U	<1 U	<1 U	<0.5 U	<1 U	1.3	<1 U	<0.5 U	8	<1 U	<1 U	
	10/20/2005	1.5	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	1.2	<1.0 U	<1.0 U	11	<1.0 U	<2.0 U	
	9/26/2006	0.65 J	<1 U	<1 U	<1 U	<1 U	<1 U	0.81 J	<1 U	<1 U	10	<1 U	<2 U	
	9/19/2007	0.66 J	<1 U	<1 U	<1 U	<1 U	<1 U	0.89 J	<1 U	<1 U	7.9	<1 U	<2 U	
9/25/2008	0.62 J	0.85 J	<1 U	<1 U	2.4 J	<1 U	1.7	<1 U	0.35 J	12 J	<1 U	<2 U		
GM-10	9/21/1999	1.7	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	14.8	<1.0	<1.0	
	9/27/2000	2.5	1.4	<1.0	<1.0	5.7	<1.0	1.4	<1.0	<1.0	23.2	<1.0	<1.0	
	11/8/2001	2.7	3.4	<1.0	<1.0	16	<1.0	1.9	<1.0	0.93	27	1.2	<1.0	
	9/18/2002	1.8	0.61J	<1.0	<1.0	2.3	<1.0	1.1	<1.0	<0.50	19	<1.0	<1.0	
	9/24/2003	0.96 J	<1 U	<1 U	<1 U	<0.5 U	<1 U	2.2	<1 U	<0.5 U	33	<1 U	<1 U	
	9/14/2004	1.2	<1 U	<1 U	<1 U	0.38 J	<1 U	1.5	<1 U	<0.5 U	15	<1 U	<1 U	
	10/20/2005	1.6	<1.0 U	<1.0 U	<1.0 U	0.31 J	<1.0 U	1.2	<1.0 U	<1.0 U	12	<1.0 U	<2.0 U	
	9/27/2006	0.9 J	0.29 J	<1 U	<1 U	0.77 J	<1 U	0.98 J	<1 U	<1 U	11	<1 U	<2 U	
	9/19/2007	0.75 J	<1 U	<1 U	<1 U	0.35 J	<1 U	0.93 J	<1 U	<1 U	8.8	<1 U	<2 U	
9/24/2008	0.53 J	<1 U	<1 U	<1 U	<1 U	<1 U	0.85 J	<1 U	<1 U	5.9	<1 U	<2 U		
GM-25	9/22/1999	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	
	10/21/2010	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<2.0 U	
GM-26	9/22/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	
	9/27/2000	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	
	11/12/2001	0.19J	<1.0	<1.0	<1.0	<0.50	<1.0	1.1	<1.0	<0.50	<1.0	<1.0	<1.0	
	9/25/2002	<1	<1	<1	<1	<0.5	<1	0.92J	<1	<0.5	<1	<1	<1	
	10/1/2003	<1 U	<1 U	<1 U	<1 U	<0.5 U	<1 U	0.85 J	<1 U	<0.5 U	<1 U	<1 U	<1 U	
	9/16/2004	<1 U	<1 U	<1 U	<1 U	<0.5 U	<1 U	1.3	<1 U	<0.5 U	<1 U	<1 U	<1 U	
	10/20/2005	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	1.0	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<2.0 U	
	9/21/2006	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	0.91 J	<1 U	<1 U	<1 U	<1 U	<2 U	
	9/27/2007	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	1.2	<1 U	<1 U	<1 U	<1 U	<2 U	
	1/21/2008	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	1.2	<1 U	<1 U	<1 U	<1 U	<2 U	
	10/1/2008	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	1.4	<1 U	<1 U	<1 U	<1 U	<2 U	
	11/12/2009	<1.0 U	<1.0 U	<1.0 U	0.51 J	<1.0 U	<1.0 U	1.6	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<2.0 U	
9/22/2010	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	1.6	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<2.0 U		
GM-46	3/2/2006	<1 U	2.7	<1 U	<1 U	6.8	<1 U	<1 U	<1 U	0.35 J	22	1.9	<2 U	
	11/30/2006	<1 U	0.43 J	<1 U	<1 U	5.2	<1 U	0.67 J	<1 U	<1 U	1.5	1.5	<2 U	
GM-47	3/1/2006	2.2	1.8	<1.0 U	<1.0 U	7.2	<1.0 U	78	0.28 J	1.5	50	<1.0 U	<2.0 U	
	9/19/2006	2.2	1.7 J	<2.0 U	<2.0 U	9.5	<2.0 U	64	<2.0 U	1.4 J	44	<2.0 U	<4.0 U	
	11/30/2006	1.9 J	1.7 J	<2.0 U	<2.0 U	8.9	<2.0 U	69	<2.0 U	1.4 J	51	<2.0 U	<4.0 U	
	9/25/2007	2.2 J	2.4 J	<7.1 U	<7.1 U	170	<7.1 U	71	<7.1 U	4.6 J	53	<7.1 U	<14 U	
	10/1/2008	1.4 J	2 J	<5 U	<5 U	160	<5 U	86	<5 U	3.9 J	36	1.9 J	<10 U	
	11/13/2009	1.0 J	2.4 J	<2.5 U	<2.5 U	61	<2.5 U	61	<2.5 U	2.8	29	0.66 J	<5.0 U	
	1/28/2010	0.85 J	2.3 J	<2.5 U	<2.5 U	51	<2.5 U	60	<2.5 U	2.5	24	<2.5 U	<5.0 U	
9/23/2010	0.77 J	2.7	<1.7 U	<1.7 U	42	<1.7 U	60	<1.7 U	2.4	22	0.39 J	<3.3 U		
GM-48	3/1/2006	0.62 J	0.71 J	<1 U	<1 U	0.7 J	<1 U	<1 U	0.25 J	<1 U	2.1	<1 U	<2 U	
	11/30/2006	0.97 J	0.72 J	<1 U	<1 U	0.83 J	<1 U	0.26 J	<1 U	0.19 J	2.4	<1 U	<2 U	
GM-49	3/1/2006	2.4	3.4	<1 U	<1 U	4.7	<1 U	2.5	0.25 J	0.66 J	8.4	<1 U	<2 U	
	11/30/2006	1.8	2.6	<1 U	<1 U	3.8	<1 U	3.1	<1 U	0.53 J	11	<1 U	<2 U	

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											Vinyl Chloride	Xylenes (total)
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethyl-benzene	PCE	Toluene	trans-1,2-DCE	TCE			
GM-50	4/28/2006	2.4 J	1.9 J	< 5.0 U	< 5.0 U	5.2	< 5.0 U	180	< 5.0 U	1.6 J	120	< 5.0 U	< 10 U	
	9/19/2006	1.4 J	1.5 J	< 5.6 U	< 5.6 U	13	< 5.6 U	150	< 5.6 U	1.7 J	84	< 5.6 U	< 11 U	
	11/30/2006	1.6 J	1.5 J	< 5.0 U	< 5.0 U	34	< 5.0 U	140	< 5.0 U	1.5 J	86	< 5.0 U	< 10 U	
	9/25/2007	1.4 J	1.9 J	< 5.9 U	< 5.9 U	130	< 5.9 U	100	< 5.9 U	2.5 J	44	< 5.9 U	< 12 U	
	10/1/2008	1.6 J	1.7 J	< 2.5 U	< 2.5 U	13	< 2.5 U	82	< 2.5 U	0.68 J	54	< 2.5 U	< 5 U	
	11/13/2009	1.8 J	1.3 J	< 5.0 U	< 5.0 U	11	< 5.0 U	110	< 5.0 U	< 5.0 U	120	< 5.0 U	< 10 U	
	1/28/2010	1.5 J	1.2 J	< 5.0 U	< 5.0 U	8.1	< 5.0 U	130	< 5.0 U	< 5.0 U	120	< 5.0 U	< 10 U	
	9/23/2010	1.6 J	< 5.0 U	< 5.0 U	< 5.0 U	4.0 J	< 5.0 U	130	< 5.0 U	0.95 J	140	< 5.0 U	< 10 U	
GM-51	4/28/2006	0.9 J	< 1 U	< 1 U	< 1 U	0.32 J	< 1 U	6.7	< 1 U	< 1 U	4.9	< 1 U	< 2 U	
	11/30/2006	0.76 J	< 1 U	< 1 U	< 1 U	0.26 J	< 1 U	6.6	< 1 U	< 1 U	5	< 1 U	< 2 U	
	9/27/2007	0.61 J	0.23 J	< 1 U	< 1 U	1	< 1 U	7.2	0.29 J	< 1 U	3.9	< 1 U	< 2 U	
	9/30/2008	0.6 J	0.78 J	< 1 U	< 1 U	2	< 1 U	9.3	< 1 U	0.7 J	7.7	< 1 U	< 2 U	
GM-52	4/28/2006	2	0.94 J	< 2 U	< 2 U	1.9 J	< 2 U	75	< 2 U	0.67 J	61	< 2 U	< 4 U	
	11/30/2006	1.3 J	0.93 J	< 2 U	< 2 U	2.7	< 2 U	67	< 2 U	0.76 J	47	< 2 U	< 4 U	
	9/26/2007	1.3 J	1.5 J	< 2.5 U	< 2.5 U	18	< 2.5 U	88	< 2.5 U	1 J	47	< 2.5 U	< 5 U	
	9/30/2008	1.9 J	3	< 2.5 U	< 2.5 U	14	< 2.5 U	88	< 2.5 U	< 2.5 U	43	< 2.5 U	< 5 U	
	11/12/2009	1.1 J	1.1 J	< 2.5 U	< 2.5 U	1.5 J	< 2.5 U	94	< 2.5 U	0.83 J	43	< 2.5 U	< 5.0 U	
	1/27/2010	1.0 J	1.0 J	< 4.0 U	< 4.0 U	1.6 J	< 4.0 U	94	< 4.0 U	0.99 J	42	< 4.0 U	< 8.0 U	
	9/22/2010	0.92 J	0.94 J	< 3.3 U	< 3.3 U	1.8 J	< 3.3 U	90	< 3.3 U	0.74 J	50	< 3.3 U	< 6.7 U	
GM-55	9/14/2006	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	7.4	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U	
	11/12/2009	< 1.0 U	< 1.0 U	< 1.0 U	0.46 J	< 1.0 U	< 1.0 U	7.7	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U	
	9/22/2010	< 1.0 U	< 1.0 U	< 1.0 U	0.23 J	< 1.0 U	< 1.0 U	7.2	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U	
GM-57	9/14/2006	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	0.21 J	1.9	0.48 J	< 1 U	< 1 U	< 1 U	< 2 U	
	1/21/2008	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	1.9	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U	
GM-62 ⁽¹⁾	9/14/2006	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	15	0.24 J	< 1 U	< 1 U	< 1 U	< 2 U	
	4/8/2010	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	20	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U	
GM-63	9/14/2006	2.3 J	1.9 J	< 5 U	< 5 U	5.6	< 5 U	160	< 5 U	1.4 J	120	< 5 U	< 10 U	
	12/1/2006	2.3 J	1.9 J	< 4 U	< 4 U	8.8	< 4 U	140	< 4 U	1.3 J	100	< 4 U	< 8 U	
	9/25/2007	2.7 J	1.8 J	< 6.7 U	< 6.7 U	5 J	< 6.7 U	130	< 6.7 U	< 6.7 U	120	< 6.7 U	< 13 U	
	10/1/2008	4 J	2.2 J	< 5 U	< 5 U	4.9 J	< 5 U	140	< 5 U	< 5 U	92	< 5 U	< 10 U	
	1/28/2010	2.0 J	< 5.7 U	< 5.7 U	< 5.7 U	3.2 J	< 5.7 U	150	< 5.7 U	< 5.7 U	140	< 5.7 U	< 11 U	
GM-64	9/14/2006	1.8 J	1.8 J	< 2.5 U	< 2.5 U	16	< 2.5 U	77	< 2.5 U	1.6 J	34	< 2.5 U	< 5 U	
	12/1/2006	2.1 J	2.1 J	< 2.5 U	< 2.5 U	42	< 2.5 U	85	< 2.5 U	2 J	35	< 2.5 U	< 5 U	
	9/25/2007	< 3.3 U	2.7 J	< 3.3 U	< 3.3 U	74	< 3.3 U	11	< 3.3 U	6.6	4.5	18	< 6.7 U	
	10/1/2008	0.55 J	2.7	< 1 U	< 1 U	15	< 1 U	31	< 1 U	2.3	14	2.3	< 2 U	
GM-65S	5/2/2007	0.62 J	0.78 J	< 1 U	< 1 U	1.7	< 1 U	11	< 1 U	< 1 U	8	< 1 U	< 2 U	
	1/21/2008	0.58 J	0.54 J	< 1 U	< 1 U	1.5	< 1 U	13	< 1 U	< 1 U	7.9	< 1 U	< 2 U	
	10/6/2008	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	8.7	< 1 U	< 1 U	3.8	< 1 U	< 2 U	
	11/12/2009	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	11	< 1.0 U	< 1.0 U	2.5	< 1.0 U	< 2.0 U	
	1/27/2010	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.22 J	< 1.0 U	13	< 1.0 U	< 1.0 U	2.8	< 1.0 U	< 2.0 U	
	9/22/2010	< 1.0 U	0.34 J	< 1.0 U	< 1.0 U	0.63 J	< 1.0 U	9.9	< 1.0 U	< 1.0 U	2.3	< 1.0 U	< 2.0 U	
GM-77S	9/27/2007	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U	
	10/21/2010	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U	

Table A-1. Annual Groundwater Analytical Results for the Upper Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethyl-benzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes (total)
GM-78	10/23/2007	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	8.9	0.23 J	< 1 U	< 1 U	< 1 U	< 2 U
	1/21/2008	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	11	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U
	10/2/2008	< 1 U	< 1 U	< 1 U	< 1 UJ	< 1 U	< 1 U	11	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U
	11/12/2009	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 UJ	12	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U
	9/28/2010	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	11	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U
GM-79	10/23/2007	0.66 J	0.24 J	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	1.6	< 1 U	< 2 U
	10/2/2008	0.65 J	< 1 U	< 1 U	< 1 UJ	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	1.8	< 1 U	< 2 U
	11/12/2009	0.72 J	0.31 J	< 1.0 U	0.48 J	0.28 J	< 1.0 UJ	< 1.0 U	< 1.0 U	< 1.0 U	2.1	< 1.0 U	< 2.0 U
	9/22/2010	0.51 J	0.23 J	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	1.6	< 1.0 U	< 2.0 U
GM-80	10/23/2007	< 1 U	0.38 J	< 1 U	< 1 U	1.5	< 1 U	0.68 J	< 1 U	0.21 J	4	< 1 U	< 2 U
	9/22/2008	< 1 U	0.39 J	< 1 U	< 1 U	3.6	< 1 U	0.93 J	< 1 U	0.19 J	5.4	< 1 U	< 2 U
	11/12/2009	0.24 J	0.55 J	< 1.0 U	< 1.0 U	3.2	< 1.0 U	1.6	< 1.0 U	0.25 J	9.8	< 1.0 U	< 2.0 U
	4/9/2010	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.85 J	< 1.0 U	1.9	< 1.0 U	< 1.0 U	6.6	< 1.0 U	< 2.0 U
	9/21/2010	< 1.0 U	0.30 J	< 1.0 U	< 1.0 U	1.3	< 1.0 U	2.6	< 1.0 U	< 1.0 U	6	< 1.0 U	< 2.0 U
GM-81	10/23/2007	0.22 J	0.93 J	< 1 U	< 1 U	0.98 J	< 1 U	< 1 U	< 1 U	< 1 U	0.61 J	< 1 U	< 2 U
	4/9/2010	0.23 J	0.92 J	< 1.0 U	< 1.0 U	1.5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	1.2	< 1.0 U	< 2.0 U

(1) - Well abandoned.

All concentrations presented in micrograms per liter.

VOCs - Volatile Organic Compounds.

1,1,1-TCA - 1,1,1-Trichloroethane.

1,1-DCA - 1,1-Dichloroethane.

1,1-DCE - 1,1-Dichloroethene.

cis-1,2-DCE - cis-1,1-Dichloroethene.

PCE - Tetrachloroethene.

trans-1,2-DCE - trans-1,2-Dichloroethene.

TCE - Trichloroethene.

< - Constituent not detected above laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above laboratory reporting limit shown.

Table A-2. Annual Groundwater Analytical Results for the Lower Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethyl-benzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes
Upgradient of the Site													
HR-10	9/15/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
	9/29/2000	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
	11/14/2001	< 1.0	< 1.0	< 1.0	< 1.0	< 0.50	< 1.0	< 1.0	< 1.0	< 0.50	< 1.0	< 1.0	< 1.0
	9/27/2002	< 1	< 1	< 1	< 1	< 0.5	< 1	< 1	< 1	< 0.5	< 1	< 1	< 1
	9/17/2003	< 1 U	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	< 1 U	< 1 U
	9/20/2004	< 1 U	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	< 1 U	< 1 U
	10/24/2005	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U
	9/26/2006	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U
	9/25/2007	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U
9/30/2008	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U	
HR-12	9/14/1999	<1.0UJ	2.7	<1.0	1.2	1.8	<1.0	<1.0	<1.0	<1.0	<1.0	1.7	<1.0
	9/28/2000	<1.0	2.2	<1.0	<1.0	2.0	<1.0	<1.0	<1.0	<1.0	<1.0	2.5	<1.0
	11/14/2001	< 1.0	3.6	< 1.0	< 1.0	2.7	< 1.0	< 1.0	< 1.0	0.23	< 1.0	3.8	< 1.0
	9/26/2002	< 1	2.4	< 1	< 1	2.1	< 1	< 1	< 1	< 0.5	< 1	1.7	< 1
	9/18/2003	< 1 U	1.7	< 1 U	< 1 U	1.4	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	1.6	< 1 U
	9/21/2004	< 1 U	1.8	< 1 U	< 1 U	1.2	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	1.1	< 1 U
	10/24/2005	< 1.0 U	2.1	< 1.0 U	< 1.0 U	1.5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.36 J	< 2.0 U
	9/26/2006	< 1 U	2.1	< 1 U	< 1 U	1.3	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U
	9/19/2007	< 1 U	2.2	< 1 U	< 1 U	1.3	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U
	9/25/2008	0.39 J	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	1.3	< 1 U	< 1 U	5.1	< 1 U	< 2 U
	11/13/2009	< 1.0 U	2	< 1.0 U	< 1.0 U	1.1	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U
	9/28/2010	< 1.0 U	2.1	< 1.0 U	< 1.0 U	1.2	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U
On-Site													
HR-14	9/15/1999	<1.0	<1.0	<1.0	<1.0	7.9	<1.0	<1.0	<1.0	<1.0	3.4	11.5	<1.0
	9/30/2002	< 1	< 1	< 1	< 1	3.6	< 1	< 1	< 1	< 0.5	1.2	< 1	< 1
HR-15	9/15/1999	<1.0	<1.0	<1.0	<1.0	2.5	<1.0	<1.0	<1.0	<1.0	<1.0	11.0	<1.0
	9/29/2000	<1.0	<1.0	<1.0	<1.0	2.8	<1.0	<1.0	<1.0	<1.0	<1.0	11.2	<1.0
	11/14/2001	< 1.0	< 1.0	< 1.0	< 1.0	0.86	< 1.0	< 1.0	< 1.0	< 0.50	< 1.0	< 1.0	< 1.0
	9/30/2002	< 1	< 1UJ	< 1	< 1	1	< 1	< 1	< 1	< 0.5	< 1	< 1	< 1
	9/17/2003	< 1 U	< 1 U	< 1 U	< 1 U	2.2	< 1 U	< 1 U	< 1 U	< 0.5 U	0.29 J	14	< 1 U
	9/21/2004	< 1 U	< 1 U	< 1 U	< 1 U	2.5	< 1 U	< 1 U	< 1 U	< 0.5 U	0.38 J	19	< 1 U
	10/25/2005	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	2.2	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.40 J	14	< 2.0 U
	9/25/2006	< 1 U	< 1 U	< 1 U	< 1 U	2.2	< 1 U	< 1 U	< 1 U	< 1 U	0.5 J	13	< 2 U
	9/26/2007	< 1 U	< 1 U	< 1 U	< 1 U	2.5	< 1 U	< 1 U	< 1 U	< 1 U	0.37 J	15	< 2 U
	9/29/2008	< 1 U	< 1 U	< 1 U	< 1 U	3.6	< 1 U	< 1 U	< 1 U	< 1 U	0.47 J	9.7	< 2 U
	11/13/2009	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	3.1	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.7 J	6.5	< 2.0 U
	9/24/2010	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	3.0	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.60 J	3.8	< 2.0 U

Table A-2. Annual Groundwater Analytical Results for the Lower Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethyl-benzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes
HR-13	9/15/1999	1.6	41.4	<1.0	<1.0	20.8	<1.0	<1.0	<1.0	3.1	3.4	<1.0	<1.0
	9/29/2000	1.7	39.5	<1.0	<1.0	14.1	<1.0	<1.0	<1.0	2.5	2.0	<1.0	<1.0
	11/14/2001	0.74J	15	<1.0	0.18J	6.5	<1.0	<1.0	<1.0	0.65	1.2	<1.0	<1.0
	9/30/2002	1.4	25	<1	<1	11	<1	<1	<1	1.4	3.6	<1	<1
	9/16/2003	2.2	33	<1 U	<1 U	12	<1 U	<1 U	<1 U	1.8	5.7	<1 U	<1 U
	9/21/2004	2.6	30	0.27 J	<1 U	12	<1 U	<1 U	<1 U	1.5	21	0.43 J	<1 U
	10/25/2005	2.3	25	0.25 J	<1.0 U	11	<1.0 U	0.20 J	<1.0 U	1.5	20	<1.0 U	<2.0 U
	9/25/2006	2	22	0.18 J	<1 U	9	<1 U	0.2 J	<1 U	1.4	15	<1 U	<2 U
31	9/25/2007	<1 U	1.5	<1 U	<1 U	1.1	<1 U	<1 U	<1 U	<1 U	5.1	<1 U	<2 U
	9/29/2000	<1.0	7.4	<1.0	<1.0	8.4	<1.0	<1.0	<1.0	<1.0	12.9	4.4	<1.0
39	11/15/2001	<1.0	3.1	<1.0	<1.0	2.4	<1.0	<1.0	<1.0	<0.50	5.1	2.5	<1.0
	9/27/2002	<1	1.6	<1	<1	1.3	<1	<1	<1	<0.5	3.8	0.51J	<1
GM-39	9/24/2003	<1 U	0.58 J	<1 U	<1 U	0.71	<1 U	<1 U	<1 U	<0.5 U	0.89 J	<1 U	<1 U
	12/10/2003	<1 U	<1 U	<1 U	<1 U	<0.5 U	<1 U	<1 U	0.18 J	<0.5 U	<1 U	1.3	<1 U
	9/20/2004	<1 U	<1 U	<1 U	<1 U	<0.5 U	<1 U	<1 U	<1 U	<0.5 U	<1 U	1.8	<1 U
	10/24/2005	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	0.77 J	<2.0 U
	9/27/2006	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	1.7	<2 U
	9/26/2007	<1 U	<1 U	<1 U	<1 U	19 J	<1 U	<1 U	<1 U	0.23 J	<1 U	1.6	<2 U
	10/1/2008	<1 U	<1 U	<1 U	<1 U	0.67 J	<1 U	<1 U	<1 U	<1 U	<1 U	3.2	<2 U
GM-40	12/10/2003	<1 U	<1 U	<1 U	<1 U	<0.5 U	<1 U	<1 U	<1 U	<0.5 U	<1 U	3.1	<1 U
	9/20/2004	<1 U	<1 U	<1 U	<1 U	<0.5 U	<1 U	<1 U	<1 U	<0.5 U	<1 U	3.2	<1 U
	10/25/2005	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	2.9	<2.0 U
	9/26/2006	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	3.9	<2 U
	9/25/2007	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	4	<2 U
	9/30/2008	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	<1 U	3.6	<2 U
GM-61	9/15/2006	0.5 J	2.2	<1.7 U	<1.7 U	2.6	<1.7 U	20	0.44 J	<1.7 U	36	<1.7 U	<3.3 U
	9/26/2007	0.59 J	1.6 J	<1.7 U	<1.7 U	3.9	<1.7 U	28	<1.7 U	<1.7 U	56	<1.7 U	<3.3 U
	10/1/2008	<1 U	0.94 J	0.19 J	<1 U	20	<1 U	13	<1 U	0.92 J	23	0.75 J	<2 U
GM-41	12/10/2003	<11 U	<11 U	<11 U	<1 U	10	<11 U	<11 U	<11 U	<5.6 U	320	<11 U	<11 U
	9/21/2004	<6.2 U	<6.2 U	<6.2 U	<6.2 U	24	<6.2 U	<6.2 U	<6.2 U	<3.1 U	180	<6.2 U	<6.2 U
	10/24/2005	<10 U	<10 U	<10 U	<10 U	16	<10 U	<10 U	<10 U	<10 U	250	<10 U	<20 U
	9/18/2006	<4 U	<4 U	<4 U	<4 U	11	<4 U	<4 U	<4 U	<4 U	210	<4 U	<8 U
	5/3/2007	<6.7 U	<6.7 U	<6.7 U	<6.7 U	15	<6.7 U	<6.7 U	<6.7 U	<6.7 U	170	2.4 J	<13 U
	9/20/2007	<6.7 U	<6.7 U	<6.7 U	<6.7 U	17	<6.7 U	<6.7 U	<6.7 U	1.4 J	230	1.9 J	<13 U
	9/26/2008	<7.1 U	<7.1 U	<7.1 U	<7.1 U	11	<7.1 U	<7.1 U	<7.1 U	<7.1 U	180	<7.1 U	<14 U
GM-58	9/14/2006	<1 U	<1 U	<1 U	<1 U	0.73 J	<1 U	4.4	0.4 J	<1 U	0.72 J	<1 U	<2 U
	11/30/2006	<3.3 U	<3.3 U	<3.3 U	<3.3 U	<3.3 U	<3.3 U	85	<3.3 U	<3.3 U	<3.3 U	<3.3 U	<6.7 U
	5/3/2007	<2.9 U	<2.9 U	<2.9 U	<2.9 U	<2.9 U	<2.9 U	82	<2.9 U	<2.9 U	<2.9 U	<2.9 U	<5.7 U
	9/20/2007	<3.3 U	<3.3 U	<3.3 U	<3.3 U	<3.3 U	<3.3 U	69	<3.3 U	<3.3 U	<3.3 U	<3.3 U	<6.7 U
	9/26/2008	<2.5 U	<2.5 U	<2.5 U	<2.5 U	<2.5 U	<2.5 U	80	<2.5 U	<2.5 U	<2.5 U	<2.5 U	<5 U

Table A-2. Annual Groundwater Analytical Results for the Lower Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethyl-benzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes
GM-54	9/14/2006	< 6.7 U	< 6.7 U	< 6.7 U	< 6.7 U	< 6.7 U	< 6.7 U	180	< 6.7 U	< 6.7 U	3.2 J	< 6.7 U	< 13 U
	5/2/2007	< 5 U	< 5 U	< 5 U	< 5 U	< 5 U	< 5 U	160	< 5 U	< 5 U	2.9 J	< 5 U	< 10 U
	9/20/2007	< 5 U	< 5 U	< 5 U	< 5 U	< 5 U	< 5 U	150	< 5 U	< 5 U	2.4 J	< 5 U	< 10 U
	9/30/2008	< 5.7 U	< 5.7 U	< 5.7 U	< 5.7 U	< 5.7 U	< 5.7 U	190	< 5.7 U	< 5.7 U	2.5 J	< 5.7 U	< 11 U
	11/13/2009	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	120	< 5.0 U	< 5.0 U	2.9 J	< 5.0 U	< 10 U
	1/28/2010	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	120	< 5.0 U	< 5.0 U	2.4 J	< 5.0 U	< 10 U
	9/23/2010	< 2.5 U	< 2.5 U	< 2.5 U	< 2.5 U	< 2.5 U	< 2.5 U	92	< 2.5 U	< 2.5 U	2.2 J	< 2.5 U	< 5.0 U
GM-42	12/9/2003	< 1 U	0.46 J	< 1 U	< 1 U	11	< 1 U	0.27 J	< 1 U	0.34 J	0.37 J	1	< 1 U
	9/20/2004	< 1 U	0.7 J	0.25 J	< 1 U	16	< 1 U	< 1 U	< 1 U	0.44 J	0.43 J	0.92 J	< 1 U
	10/25/2005	< 1.0 U	0.64 J	0.21 J	< 1.0 U	17	< 1.0 U	0.19 J	< 1.0 U	0.59 J	0.85 J	0.56 J	< 2.0 U
	9/26/2006	< 1 U	0.5 J	< 1 U	< 1 U	14	< 1 U	< 1 U	< 1 U	0.44 J	0.64 J	0.45 J	< 2 U
	9/25/2007	< 1 U	0.67 J	< 1 U	< 1 U	18	< 1 U	< 1 U	0.18 J	0.69 J	2.2	0.44 J	< 2 U
	9/30/2008	< 1 U	0.66 J	0.53 J	< 1 U	20	< 1 U	< 1 U	< 1 U	0.89 J	9.9	0.31 J	< 2 U
GM-19D	9/28/1999	<1.0	<1.0	<1.0	<1.0	1.2	<1.0	<1.0	<1.0	<1.0	13.5	1.5	<1.0
	10/2/2000	<1.0	<1.0	<1.0	<1.0	3.5	<1.0	<1.0	<1.0	<1.0	2.9	15.7	<1.0
	11/14/2001	0.18J	< 1.0	< 1.0	< 1.0	0.92	< 1.0	< 1.0	0.38J	< 0.50	3.7	13	< 1.0
	9/26/2002	< 1	< 1	< 1	< 1	0.81	< 1	< 1	< 1	< 0.5	3.1	0.36J	< 1
	9/25/2003	< 1 U	< 1 U	< 1 U	< 1 U	1.8	< 1 U	< 1 U	< 1 U	< 0.5 U	0.24 J	17	< 1 U
	9/20/2004	0.31 J	< 1 U	< 1 U	< 1 U	2	< 1 U	< 1 U	< 1 U	< 0.5 U	3.5	18	< 1 U
	10/25/2005	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	2.7	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	1.2	15	< 2.0 U
	9/26/2006	< 1 U	< 1 U	< 1 U	< 1 U	2	< 1 U	< 1 U	< 1 U	< 1 U	1.4	18	< 2 U
	9/17/2007	0.25 J	< 1 U	< 1 U	< 1 U	1.4	< 1 U	< 1 U	< 1 U	< 1 U	3.2	16	< 2 U
	9/23/2008	< 1 U	< 1 U	< 1 U	< 1 U	2.4	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	9.8	< 2 U
	11/11/2009	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	2.1	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	1.7	14	< 2.0 U
	9/27/2010	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	2.4	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.98 J	9.9	< 2.0 U
GM-7R	9/28/1999	4.2	<1.0	<1.0	<1.0	2.1	<1.0	<1.0	<1.0	<1.0	76.1	<1.0	<1.0
GM-67D	5/3/2007	0.59 J	3	0.36 J	< 1.7 U	23	< 1.7 U	54	< 1.7 U	0.83 J	45	< 1.7 U	< 3.3 U
GM-68D	5/4/2007	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	< 50 U	1500	< 50 U	< 50 U	750	< 50 U	< 100 U
	10/3/2008	< 5 U	< 5 U	< 5 U	< 5 U	14	< 5 U	190	< 5 U	< 5 U	46	< 5 U	< 10 U
	11/16/2009	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	4.5	< 2.0 U	130 J	< 2.0 U	< 2.0 U	35	< 2.0 U	< 4.0 U
	9/29/2010	< 3.3 U	< 3.3 U	< 3.3 U	< 3.3 U	3.0 J	< 3.3 U	100	< 3.3 U	< 3.3 U	22	< 3.3 U	< 6.7 U
GM-69	5/3/2007	< 12 U	8.7 J	< 12 U	< 12 U	29	< 12 U	6.5 J	< 12 U	< 12 U	300	< 12 U	< 24 U
GM-70	5/3/2007	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	11	< 1 U	< 1 U	0.32 J	< 1 U	< 2 U
GM-73	10/23/2007	< 6.7 U	< 6.7 U	< 6.7 U	< 6.7 U	< 6.7 U	< 6.7 U	160	< 6.7 U	< 6.7 U	22	< 6.7 U	< 13 U
GM-74D	9/27/2007	< 8 U	< 8 U	< 8 U	< 8 U	< 8 U	< 8 U	250	< 8 U	< 8 U	130	< 8 U	< 16 U
	4/9/2010	< 2.5 U	< 2.5 U	< 2.5 U	< 2.5 U	8.0	< 2.5 U	98	< 2.5 U	< 2.5 U	50	< 2.5 U	< 5.0 U
GM-75D	9/26/2007	< 50 U	< 50 U	< 50 U	< 50 U	24 J	< 50 U	470	< 50 U	< 50 U	1700 J	< 50 U	< 100 U
	10/6/2008	< 33 U	< 33 U	< 33 U	< 33 U	120	< 33 U	220	< 33 U	< 33 U	750	< 33 U	< 67 U
	11/16/2009	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	15	< 5.0 U	320	< 5.0 U	< 5.0 U	210	< 5.0 U	< 10 U
	4/8/2010	< 9.1 U	< 9.1 U	< 9.1 U	< 9.1 U	19	< 9.1 U	320	< 9.1 U	< 9.1 U	200	< 9.1 U	< 18 U
	9/29/2010	< 9.1 U	< 9.1 U	< 9.1 U	< 9.1 U	12	< 9.1 U	260	< 9.1 U	< 9.1 U	190	< 9.1 U	< 18 U
GM-76D	9/23/2007	< 1 U	0.3 J	< 1 U	< 1 U	< 1 U	< 1 U	0.63 J	< 1 U	< 1 U	2.7	< 1 U	< 2 U

Table A-2. Annual Groundwater Analytical Results for the Lower Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethyl-benzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes
GM-82	2/26/2008	< 2 U	2.3	< 2 U	< 2 U	47	< 2 U	60	< 2 U	1.9 J	91	< 2 U	< 4 U
	10/2/2008	1 J	2.4 J	0.64 J	< 3.3 U	46	< 3.3 U	51	< 3.3 U	2 J	100	< 3.3 U	< 6.7 U
GM-83D	2/26/2008	< 1 U	< 1 U	< 1 U	< 1 U	0.28 J	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	1.5	< 2 U
	10/2/2008	< 1 U	< 1 U	< 1 U	< 1 UJ	0.3 J	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	1.3	< 2 U
	11/11/2009	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.31 J	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	2.1	< 2.0 U
	9/22/2010	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.31 J	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	2.0	< 2.0 U
GM-84	2/26/2008	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	0.57 J	< 1 U	5.5	< 1 U	< 2 U
	10/2/2008	< 1 U	< 1 U	< 1 U	< 1 UJ	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	6.6	< 1 U	< 2 U
	11/16/2009	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	6.3	< 1.0 U	< 2.0 U
	1/27/2010	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	6.4	< 1.0 U	< 2.0 U
	9/23/2010	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	5.9	< 1.0 U	< 2.0 U
Downgradient of the Site													
GM-3	9/28/1999	1.7	<1.0	<1.0	<1.0	1.1	<1.0	1.2	<1.0	<1.0	7.5	<1.0	<1.0
	10/2/2000	1.0	2.1	<1.0	<1.0	8.3	<1.0	1.5	<1.0	1.1	9.4	<1.0	<1.0
	11/14/2001	0.16J	0.95J	< 1.0	< 1.0	2.6	< 1.0	0.48J	< 1.0	0.25J	2.9	< 1.0	< 1.0
	10/1/2002	0.74J	1.8	< 1	< 1	8.9	< 1	1.4	< 1	1.2	9.5	0.63J	< 1
	10/2/2003	0.96 J	1.6	< 1 U	< 1 U	5.5	0.26 J	1.7	< 1 U	0.77	12	< 1 U	< 1 U
	9/21/2004	1	1.8	< 1 U	< 1 U	4.9	< 1 U	2	< 1 U	0.75	13	< 1 U	< 1 U
	10/25/2005	0.83 J	1.6	< 1.0 U	< 1.0 U	4.7	< 1.0 U	2.0	< 1.0 U	0.66 J	14	< 1.0 U	< 2.0 U
	9/22/2006	0.59 J	2 J	< 1 UJ	< 1 UJ	6.1 J	< 1 UJ	2.1 J	< 1 UJ	1 J	13 J	0.27 J	< 2 UJ
	9/18/2007	0.67 J	1.5	< 1 U	< 1 U	3.8	< 1 U	1.9	< 1 U	0.77 J	14	< 1 U	< 2 U
	9/24/2008	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 UJ	< 1 U	< 1 U	< 1 UJ	< 1 U	< 2 U
GM-4	9/28/1999	<1.0	<1.0	<1.0	<1.0	2.3	<1.0	<1.0	<1.0	<1.0	13.4	<1.0	<1.0
GM-5	9/28/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	3.9	<1.0	1.3	<1.0	<1.0
GM-1	9/28/1999	1.1	<1.0	<1.0	<1.0	<1.0	<1.0	2.0	5.2	<1.0	30.6	<1.0	<1.0
	10/2/2000	2.2	<1.0	<1.0	<1.0	<1.0	<1.0	2.8	<1.0	<1.0	37.2	<1.0	<1.0
	11/14/2001	0.80J	0.29J	< 1.0	< 1.0	< 0.50	< 1.0	1.3	< 1.0	< 0.50	19	< 1.0	< 1.0
	10/1/2002	1.3 J	0.48 J	< 1.4 U	< 1.4 U	0.95	< 1.4 U	2.3	< 1.4 U	< 0.72 U	39	< 1.4 U	< 1.4 U
	10/2/2003	1.2	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	2	< 1 U	< 0.5 U	34	< 1 U	< 1 U
	9/21/2004	1.2	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	2.1	< 1 U	< 0.5 U	35	< 1 U	< 1 U
	10/25/2005	0.95 J	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	2.1	< 1.0 U	< 1.0 U	34	< 1.0 U	< 2.0 U
	9/20/2006	0.76 J	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	2.1	< 1 U	< 1 U	34	< 1 U	< 2 U
	9/18/2007	0.74 J	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	1.8	< 1 U	< 1 U	32	< 1 U	< 2 U
	9/24/2008	0.69 J	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	1.8	< 1 U	< 1 U	31	< 1 U	< 2 U

Table A-2. Annual Groundwater Analytical Results for the Lower Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethyl-benzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes
GM-15	9/24/1999	<1.0	2.4	<1.0	<1.0	4.3	<1.0	<1.0	<1.0	<1.0	4.1	<1.0	<1.0
	10/2/2000	<1.0	2.3	<1.0	<1.0	2.6	<1.0	<1.0	<1.0	<1.0	4.7	<1.0	<1.0
	11/14/2001	<1.0	1.4	<1.0	<1.0	1.2	<1.0	<1.0	<1.0	<0.50	4.9	<1.0	<1.0
	9/27/2002	<1	1.6	<1	<1	1.8	<1	<1	<1	<0.5	4.7	<1	<1
	9/22/2003	<1 U	1.7	<1 U	<1 U	1.6	<1 U	<1 U	<1 U	<0.5 U	5.9	<1 U	<1 U
	9/20/2004	<1 U	1.8	<1 U	<1 U	1.4	<1 U	<1 U	<1 U	<0.5 U	5.8	<1 U	<1 U
	10/26/2005	<1.0 U	1.7	<1.0 U	<1.0 U	1.7	<1.0 U	<1.0 U	<1.0 U	<1.0 U	5.9	<1.0 U	<2.0 U
	9/18/2006	<1 U	1.6	<1 U	<1 U	1.2	<1 U	<1 U	<1 U	<1 U	6.3	<1 U	<2 U
	9/25/2007	<1 U	1.5	<1 U	<1 U	1.1	<1 U	<1 U	<1 U	<1 U	5.1	<1 U	<2 U
	9/30/2008	<1 U	1.1	<1 U	<1 U	0.79 J	<1 U	<1 U	<1 U	<1 U	6.2	<1 U	<2 U
	11/13/2009	<1.0 U	1.2	<1.0 U	<1.0 U	1	<1.0 U	<1.0 U	<1.0 U	<1.0 U	6.5	<1.0 U	<2.0 U
GM-14	9/24/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
	9/24/1999	1.9	<1.0	<1.0	<1.0	<1.0	<1.0	3.6	<1.0	<1.0	31.0	<1.0	<1.0
	9/24/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	1.5	<1.0	<1.0	14.5	<1.0	<1.0
	10/2/2000	1.4	<1.0	<1.0	<1.0	<1.0	<1.0	3.0	<1.0	<1.0	41.3	<1.0	<1.0
	11/14/2001	0.33J	<1.0	<1.0	<1.0	<0.50	<1.0	1.0	<1.0	<0.50	12	<1.0	<1.0
	10/1/2002	1	0.34J	<1	<1	0.62	<1	2.2	<1	<0.5	35	<1	<1
	9/24/2003	0.96 J	<1 U	<1 U	<1 U	<0.5 U	<1 U	2.2	<1 U	<0.5 U	33	<1 U	<1 U
	9/21/2004	0.89 J	<1 U	<1 U	<1 U	<0.5 U	<1 U	2.1	<1 U	<0.5 U	33	<1 U	<1 U
	10/26/2005	0.75 J	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	1.7	<1.0 U	<1.0 U	32	<1.0 U	<2.0 U
	9/25/2006	0.75 J	<1 U	<1 U	<1 U	<1 U	<1 U	2	<1 U	<1 U	34	<1 U	<2 U
	9/18/2007	0.6 J	<1 U	<1 U	<1 U	<1 U	<1 U	1.5	<1 U	<1 U	35	<1 U	<2 U
GM-11	9/24/2008	0.47 J	<1 U	<1 U	<1 U	<1 U	<1 U	1.7	<1 U	<1 U	31	<1 U	<2 U
	11/12/2009	0.47 J	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	1.8	<1.0 U	<1.0 U	37	<1.0 U	<2.0 U
	9/22/2010	0.36 J	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	1.5	<1.0 U	<1.0 U	31	<1.0 U	<2.0 U
	9/24/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
	10/3/2000	1.6	<1.0	<1.0	<1.0	<1.0	<1.0	4.2	<1.0	<1.0	14.3	<1.0	<1.0
	11/14/2001	0.64J	<1.0	<1.0	<1.0	<0.50	<1.0	2.0	<1.0	<0.50	5.9	<1.0	<1.0
	9/30/2002	<1	<1	<1	<1	<0.5	<1	1.3	<1	<0.5	3.8	<1	<1
	9/22/2003	0.89 J	<1 U	<1 U	<1 U	<0.5 U	<1 U	3.6	<1 U	<0.5 U	12	<1 U	<1 U
	9/21/2004	0.96 J	<1 U	<1 U	<1 U	<0.5 U	<1 U	2.9	<1 U	<0.5 U	11	<1 U	<1 U
	10/26/2005	0.73 J	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	2.7	<1.0 U	<1.0 U	11	<1.0 U	<2.0 U
	9/26/2006	0.51 J	<1 U	<1 U	<1 U	<1 U	<1 U	2.1	<1 U	<1 U	11	<1 U	<2 U
	9/19/2007	0.5 J	<1 U	<1 U	<1 U	<1 U	<1 U	2.1	<1 U	<1 U	9.2	<1 U	<2 U
GM-20D	9/25/2008	0.45 J	<1 U	<1 U	<1 U	<1 U	<1 U	2.6	<1 U	<1 U	6.6	<1 U	<2 U
	11/13/2009	0.4 J	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	2	<1.0 U	<1.0 U	7.6	<1.0 U	<2.0 U
	9/22/2010	0.32 J	<1.0 U	<1.0 U	<1.0 U	<1.0 U	<1.0 U	2.2	<1.0 U	<1.0 U	6.5	<1.0 U	<2.0 U
	9/14/2006	0.35 J	<1 U	<1 U	<1 U	<1 U	<1 U	0.57 J	<1 U	<1 U	<1 U	<1 U	<2 U
	5/2/2007	0.4 J	1.4	<1 U	<1 U	1.5	<1 U	<1 U	<1 U	0.21 J	1.3	<1 U	<2 U
	1/21/2008	0.32 J	0.94 J	<1 U	<1 U	1	<1 U	<1 U	<1 U	<1 U	1.1	<1 U	<2 U
	1/27/2010	0.88 J	1.2	<1.0 U	<1.0 U	1.1	<1.0 U	<1.0 U	<1.0 U	<1.0 U	1.5	<1.0 U	<2.0 U
	9/14/2006	0.35 J	<1 U	<1 U	<1 U	<1 U	<1 U	0.57 J	<1 U	<1 U	<1 U	<1 U	<2 U
	5/2/2007	0.4 J	1.4	<1 U	<1 U	1.5	<1 U	<1 U	<1 U	0.21 J	1.3	<1 U	<2 U
	1/21/2008	0.32 J	0.94 J	<1 U	<1 U	1	<1 U	<1 U	<1 U	<1 U	1.1	<1 U	<2 U
	1/27/2010	0.88 J	1.2	<1.0 U	<1.0 U	1.1	<1.0 U	<1.0 U	<1.0 U	<1.0 U	1.5	<1.0 U	<2.0 U
	9/14/2006	0.35 J	<1 U	<1 U	<1 U	<1 U	<1 U	0.57 J	<1 U	<1 U	<1 U	<1 U	<2 U
GM-56	9/14/2006	0.35 J	<1 U	<1 U	<1 U	<1 U	<1 U	0.57 J	<1 U	<1 U	<1 U	<1 U	<2 U
	5/2/2007	0.4 J	1.4	<1 U	<1 U	1.5	<1 U	<1 U	<1 U	0.21 J	1.3	<1 U	<2 U
	1/21/2008	0.32 J	0.94 J	<1 U	<1 U	1	<1 U	<1 U	<1 U	<1 U	1.1	<1 U	<2 U
GM-65D	1/27/2010	0.88 J	1.2	<1.0 U	<1.0 U	1.1	<1.0 U	<1.0 U	<1.0 U	<1.0 U	1.5	<1.0 U	<2.0 U

Table A-2. Annual Groundwater Analytical Results for the Lower Aquifer Wells from 1999-2010, RACER Trust, Moraine, Ohio.

Well	Date	VOCs											
		1,1,1-TCA	1,1-DCA	1,1-DCE	Benzene	cis-1,2-DCE	Ethyl-benzene	PCE	Toluene	trans-1,2-DCE	TCE	Vinyl Chloride	Xylenes
DN-13	11/14/2001	1.1	2.5	< 1.0	< 1.0	6.2	< 1.0	< 1.0	< 1.0	0.37J	5.0	1.2	< 1.0
	9/27/2002	1.1	2.5	< 1	< 1	7.3	< 1	< 1	< 1	0.48J	6.1	1.3	< 1
	9/22/2003	1.1	2.4	< 1 U	< 1 U	6.8	< 1 U	0.31 J	< 1 U	0.4 J	6.4	1.1	< 1 U
	9/16/2004	0.84 J	2.2	< 1 U	< 1 U	6.7	< 1 U	0.44 J	< 1 U	0.49 J	6.8	2.1	< 1 U
	10/20/2005	1.5	2.0	< 1.0 U	< 1.0 U	5.5	< 1.0 U	0.38 J	< 1.0 U	< 1.0 U	7.2	2.6	< 2.0 U
	9/27/2006	0.51 J	1.5	< 1 U	< 1 U	6.1	< 1 U	0.33 J	< 1 U	0.41 J	5.7	2.3	< 2 U
	9/19/2007	0.48 J	2	< 1 U	< 1 U	6.4	< 1 U	< 1 U	< 1 U	0.4 J	3.3	2.6	< 2 U
	9/24/2008	0.63 J	< 1.7 U	< 1 U	< 1 U	6.2	< 1 U	< 1 U	< 1 U	0.44 J	4.5	1.4	< 2 U
	11/11/2009	0.77 J	2.1	< 1.0 U	< 1.0 U	7.9	< 1.0 U	0.33 J	< 1.0 U	0.50 J	6.5	1.7	< 2.0 U
	9/22/2010	0.48 J	1.6	< 1.0 U	< 1.0 U	6.9	< 1.0 U	< 1.0 U	< 1.0 U	0.44 J	5.0	1.3	< 2.0 U
GM-9	9/24/1999	1.0	<1.0	<1.0	<1.0	1.0	<1.0	<1.0	<1.0	<1.0	13.8	<1.0	<1.0
	10/3/2000	1.2	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	17.2	<1.0	<1.0
	11/14/2001	0.48J	0.58J	< 1.0	< 1.0	1.1	< 1.0	0.38J	< 1.0	< 0.50	8.6	< 1.0	< 1.0
	9/30/2002	0.99J	0.48J	< 1	< 1	0.66	< 1	< 1	< 1	< 0.5	16	< 1	< 1
	9/24/2003	1.3	0.45 J	< 1 U	< 1 U	0.56	< 1 U	< 1 U	< 1 U	< 0.5 U	20	< 1 U	< 1 U
	9/21/2004	1.1	0.6 J	< 1 U	< 1 U	0.97	< 1 U	< 1 U	< 1 U	< 0.5 U	16	< 1 U	< 1 U
	10/26/2005	0.85 J	0.59 J	< 1.0 U	< 1.0 U	0.99 J	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	15	< 1.0 U	< 2.0 U
	9/25/2006	0.44 J	0.48 J	< 1 U	< 1 U	0.85 J	< 1 U	< 1 U	< 1 U	< 1 U	6.6	< 1 U	< 2 U
	9/19/2007	1.2	0.48 J	< 1 U	< 1 U	0.71 J	< 1 U	< 1 U	< 1 U	< 1 U	18	< 1 U	< 2 U
	9/24/2008	1.2	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	18	< 1 U	< 2 U
MT-69 ⁽¹⁾	9/24/1999	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
	10/3/2000	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
	11/15/2001	< 1.0	< 1.0	< 1.0	< 1.0	< 0.50	< 1.0	< 1.0	< 1.0	< 0.50	< 1.0	< 1.0	< 1.0
	9/30/2002	< 1	< 1	< 1	< 1	< 0.5	< 1	< 1	< 1	< 0.5	< 1	< 1	< 1
	10/1/2003	< 1 U	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	< 1 U	< 1 U
	9/27/2004	< 1 U	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	< 1 U	< 1 U	< 0.5 U	< 1 U	< 1 U	< 1 U
	10/24/2005	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U
	9/26/2006	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U
	9/27/2007	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	< 2 U
	9/27/2007	< 1.4 U	< 1.4 U	< 1.4 U	< 1.4 U	< 1.4 U	< 1.4 U	45	< 1.4 U	< 1.4 U	< 1.4 U	< 1.4 U	< 2.9 U
GM-77D	9/27/2007	< 1.4 U	< 1.4 U	< 1.4 U	< 1.4 U	< 1.4 U	< 1.4 U	45	< 1.4 U	< 1.4 U	< 1.4 U	< 1.4 U	< 2.9 U
	1/28/2010	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	18	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 2.0 U

(1) - Well unusable - collapsed screen.

All concentrations presented in micrograms per liter.

VOCs - Volatile Organic Compounds.

1,1,1-TCA - 1,1,1-Trichloroethane.

1,1-DCA - 1,1-Dichloroethane.

1,1-DCE - 1,1-Dichloroethene.

cis-1,2-DCE - cis-1,1-Dichloroethene.

< - Constituent not detected above laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above laboratory limit shown.

PCE - Tetrachloroethene.

trans-1,2-DCE - trans-1,2-Dichloroethene.

TCE - Trichloroethene.



Appendix B

Groundwater Sampling Data for 2011

ARCADIS

Table B-1. Annual Groundwater Sampling Event Field Parameter Data Sheet for 2011, RACER Trust, Moraine, Ohio.

Well ID	Sample ID	pH (s.u.)	Temp (°C)	ORP (mV)	Conductivity (mS/cm)	DO (mg/L)	Purge Rate (L/min)	Time Start Purge	Time End Purge	Volume Purged (L)	Sample Date	Time Sampled	Sample Serve
Upper Aquifer Wells													
GM-2	GM-2/092911/	7.29	19.00	61.0	2.148	0.46	0.300	15:09	15:27	5.5	9/29/2011	15:27	Barnes
GM-6	GM-6/092911/	6.49	17.72	-149.0	2.260	2.73	0.400	14:12	14:34	8.8	9/29/2011	14:34	Whitney
GM-8	GM-8/092911/	7.81	21.10	-115.0	2.560	0.60	0.300	14:11	14:30	4.5	9/29/2011	14:30	Barnes
GM-16	GM-16/092911/	7.17	18.00	136.0	1.820	0.86	0.300	11:16	11:34	5.5	9/29/2011	11:34	Barnes
GM-19S	GM-19S/092911/	6.33	17.82	-150.0	2.150	2.08	0.300	11:00	11:28	10.5	9/29/2011	11:28	Whitney
GM-21	GM-21/092911/	6.50	23.00	-13.7	2.974	0.30	0.300	16:12	16:45	10.0	9/29/2011	16:45	Barnes
GM-23	GM-23/093011/	6.52	17.40	-52.0	1.812	0.54	0.300	10:44	10:59	4.5	9/30/2011	10:59	Barnes
GM-26	GM-26/092811/	6.99	15.80	280.0	0.848	6.03	0.250	8:55	9:24	5.5	9/28/2011	9:24	Barnes
GM-28 ⁽¹⁾	GM-28/100511/	NM	NM	NM	NM	NM	NM	NM	NM	NM	10/5/2011	11:58	Whitney
GM-29	GM-29/093011/	6.59	21.10	-14.2	1.651	0.15	0.300	11:55	12:43	13.5	9/30/2011	12:43	Barnes
GM-32	GM-32/092911/	7.20	18.77	-244.0	3.280	1.97	0.300	15:13	15:54	NM	9/29/2011	15:54	Whitney
GM-35	GM-35/093011/	8.18	16.51	-221.0	8.070	2.32	0.400	8:05	8:45	16.0	9/30/2011	8:45	Whitney
GM-43	GM-43/093011/	6.56	16.67	4.0	1.820	2.90	0.400	9:28	10:06	24.0	9/30/2011	10:06	Whitney
GM-47	GM-47/092911/	7.11	18.60	136.0	1.679	2.58	0.300	12:08	13:13	18.0	9/29/2011	13:33	Barnes
GM-50	GM-50/093011/	6.55	16.43	-19.0	1.680	2.42	0.350	13:30	13:47	5.0	9/30/2011	13:47	Whitney
GM-52	GM-52/092911/	7.03	16.10	273.0	1.927	1.23	0.250	8:16	8:31	3.75	9/29/2011	8:31	Barnes
GM-55	GM-55/092811/	7.20	16.50	199.0	0.880	5.42	0.200	17:56	19:19	25.0	9/28/2011	19:19	Barnes
GM-59	GM-59/093011/	6.82	17.80	191.0	1.416	3.51	0.300	9:20	9:45	7.5	9/30/2011	9:45	Barnes
GM-60	GM-60/093011/	6.54	17.13	20.0	1.700	2.39	0.350	14:25	14:43	8.7	9/30/2011	14:43	Barnes
GM-65S	GM-65S/092811/	7.07	14.90	267.0	0.856	3.52	0.350	10:24	11:03	9.0	9/28/2011	11:03	Barnes
GM-75S	GM-75S/093011/	6.65	17.64	42.0	1.560	7.98	0.400	11:01	11:19	7.2	9/30/2011	11:19	Whitney
GM-78	GM-78/092911/	7.28	16.10	271.0	1.439	5.18	0.300	9:26	9:52	7.5	9/29/2011	9:52	Whitney
GM-79	GM-79/092811/	7.29	19.00	231.0	0.924	0.65	0.300	15:14	15:29	4.5	9/28/2011	15:29	Barnes
GM-80	GM-80/092811/	7.30	17.80	234.0	0.887	0.26	0.300	14:24	14:42	5.4	9/28/2011	14:42	Barnes
HR-2	HR-2/092811/	6.60	14.99	37.0	1.470	3.43	0.375	14:45	15:08	7.0	9/28/2011	15:08	Whitney
HR-4	HR-4/092811/	6.74	15.38	26.0	1.510	2.68	0.300	13:17	13:47	10.1	9/28/2011	13:47	Whitney
HR-7	HR-7/092811/	6.65	16.37	28.0	1.600	2.78	0.350	15:37	15:54	6.0	9/28/2011	15:54	Whitney
HR-9	HR-9/092811/	6.50	16.04	12.0	1.430	3.03	0.375	12:14	12:34	9.5	9/28/2011	12:34	Whitney
HR-17	HR-17/092911/	6.35	16.72	60.0	1.480	2.82	0.300	10:05	10:24	6.7	9/29/2011	10:24	Whitney
TW-2 ⁽²⁾	TW-2/092811/	NM	NM	NM	NM	NM	NM	NM	NM	NM	9/29/2011	13:55	Barnes
W-2-N	W-2-N/092811/	6.56	14.88	-110.0	1.460	4.36	0.375	8:38	9:02	9.0	9/28/2011	9:02	Whitney
W-2-S	W-2-S/092911/	6.35	15.37	97.0	1.490	6.69	0.300	7:55	8:15	6.0	9/29/2011	8:15	Whitney
W-3-N	W-3-N/092811/	6.70	16.03	-137.0	1.360	2.73	0.300	10:22	10:42	7.0	9/28/2011	10:42	Whitney
W-3-S	W-3-S/092911/	6.42	14.49	70.0	1.280	6.27	0.300	8:39	8:54	4.5	9/29/2011	8:54	Whitney
W-4-N	W-4-N/092811/	6.61	15.27	-69.0	1.440	2.94	0.300	11:05	11:20	6.0	9/28/2011	11:20	Whitney
W-4-S	W-4-S/092911/	6.35	16.16	71.0	1.470	2.17	0.350	9:24	9:42	6.3	9/29/2011	9:42	Whitney

ARCADIS

Table B-1. Annual Groundwater Sampling Event Field Parameter Data Sheet for 2011, RACER Trust, Moraine, Ohio.

Well ID	Sample ID	pH (s.u.)	Temp (°C)	ORP (mV)	Conductivity (mS/cm)	DO (mg/L)	Purge Rate (L/min)	Time Start Purge	Time End Purge	Volume Purged (L)	Sample Date	Time Sampled	Sample Serve
Lower Aquifer Wells													
GM-9	GM-9/092811/	7.34	16.10	215.0	0.865	1.99	0.300	16:00	16:15	4.5	9/28/2011	16:15	Barnes
GM-11	GM-11/092811/	7.13	16.80	74.0	0.869	1.13	0.300	16:36	17:08	9.6	9/28/2011	17:08	Barnes
GM-15	GM-15/092911/	7.29	17.10	104.0	1.387	0.76	0.250	10:39	10:54	3.75	9/29/2011	10:54	Barnes
GM-19D	GM-19D/092911/	6.22	18.54	-115.0	1.730	3.46	0.400	13:05	13:25	8.0	9/29/2011	13:25	Whitney
GM-20D	GM-20D/092811/	7.16	16.20	261.0	0.831	0.88	0.300	13:07	13:22	5.5	9/28/2011	13:22	Barnes
GM-54	GM-54/092911/	6.42	17.69	-1.0	1.490	2.03	0.450	17:47	18:19	10.8	9/29/2011	18:19	Whitney
GM-68D	GM-68D/093011/	7.16	16.90	100.0	1.635	0.31	0.300	8:06	8:56	15.0	9/30/2011	8:56	Barnes
GM-75D	GM-75D/093011/	6.35	17.47	-33.0	1.640	2.78	0.300	11:57	12:49	24.0	9/30/2011	12:49	Whitney
GM-83D	GM-83D/092811/	6.78	14.75	-141.0	1.340	2.07	0.400	17:37	18:09	13.0	9/28/2011	18:09	Whitney
GM-84	GM-84/092911/	6.45	16.79	-42.0	1.290	2.57	0.450	16:34	17:08	15.3	9/29/2011	17:08	Whitney
HR-12	HR-12/092811/	6.58	15.15	-97.0	1.320	2.31	0.300	16:26	16:42	5.4	9/28/2011	16:42	Whitney
HR-15	HR-15/092811/	6.53	15.52	-103.0	1.480	3.22	0.325	9:43	10:00	6.0	9/28/2011	10:00	Whitney

Notes:

s.u. - Standard Units.

Temp - Temperature.

°C - Degrees Celsius.

ORP - Oxidation Reduction Potential.

mV - Millivolts.

mS/cm - Millisiemens per Centimeter.

DO - Dissolved Oxygen.

mg/L - Milligrams per Liter.

L/min - Liters per Minute.

L - Liters.

NM - Not Measured.

(1) - Field parameters not collected from GM-28 because well was damaged and sampled using a bailer.

(2) - Field parameters not collected from TW-2 due to presence of recovery pump.



Appendix C

Groundwater Analytical Database for
2011

ARCADIS

Table C-1. Summary of Groundwater VOC Analytical Results with QA/QC from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

		Upgradient Contributions HR-9 9/28/2011 Upper Aquifer	HR-2 9/28/2011 Upper Aquifer	HR-4 9/28/2011 Upper Aquifer	On-Site HR-7 9/28/2011 Upper Aquifer	HR-17 9/29/2011 Upper Aquifer	GM-19S 9/29/2011 Upper Aquifer
	Units						
<u>Volatile Organic Compounds</u>							
1,1,1-Trichloroethane	µg/L	4.0	< 1.0 U	< 1.0 U	< 1.0 U	< 5.7 U	< 1.0 U
1,1-Dichloroethane	µg/L	66	6.4	4.5	< 1.0 U	< 5.7 U	10
1,1-Dichloroethene	µg/L	< 3.3 U	< 1.0 U	< 1.0 U	< 1.0 U	< 5.7 U	< 1.0 U
Benzene	µg/L	< 3.3 U	< 1.0 U	< 1.0 U	< 1.0 U	< 5.7 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	37	2.1	< 1.0 U	1.7	< 5.7 U	5.3
Ethylbenzene	µg/L	< 3.3 U	< 1.0 U	< 1.0 U	< 1.0 U	< 5.7 U	< 1.0 U
Tetrachloroethene	µg/L	< 3.3 U	< 1.0 U	< 1.0 U	< 1.0 U	110	< 1.0 U
Toluene	µg/L	< 3.3 U	< 1.0 U	< 1.0 U	< 1.0 U	< 5.7 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	5.2	0.32 J	< 1.0 U	< 1.0 U	< 5.7 U	1.1
Trichloroethene	µg/L	9.1	0.43 J	0.27 J	7.3	57	< 1.0 U
Vinyl chloride	µg/L	< 3.3 U	< 1.0 U	< 1.0 U	< 1.0 U	< 5.7 U	12
Xylene (total)	µg/L	< 6.7 U	< 2.0 U	< 2.0 U	< 2.0 U	< 11 U	< 2.0 U
Total VOCs	µg/L	121.3	9.25	4.77	9.0	167	28.4

µg/L - Micrograms per Liter.

< - Constituent not detected above
laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above.
laboratory reporting limit shown.

QA/QC - Quality Assurance/Quality Control.

ARCADIS

Table C-1. Summary of Groundwater VOC Analytical Results with QA/QC from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

	Units	On-Site									
		GM-21 9/29/2011 Upper Aquifer	GM-23 9/30/2011 Upper Aquifer	GM-28 10/5/2011 Upper Aquifer	GM-29 9/30/2011 Upper Aquifer	GM-35 9/30/2011 Upper Aquifer	GM-43 9/30/2011 Upper Aquifer	GM-59 9/30/2011 Upper Aquifer	Duplicate 9/30/2011 QA/QC	GM-60 9/30/2011 Upper Aquifer	GM-75S 9/30/2011 Upper Aquifer
Volatile Organic Compounds											
1,1,1-Trichloroethane	µg/L	1.0	< 20 U	< 1.0 U	11 J	2.6 J	< 4.0 U	< 13 U	< 13 U	< 20 U	< 17 U
1,1-Dichloroethane	µg/L	16	< 20 U	2.1	8.5 J	20	4.2	< 13 U	< 13 U	< 20 U	< 17 U
1,1-Dichloroethene	µg/L	< 1.0 U	< 20 U	< 1.0 U	< 13 U	0.64 J	1.0 J	< 13 U	< 13 U	< 20 U	< 17 U
Benzene	µg/L	< 1.0 U	< 20 U	< 1.0 U	< 13 U	< 3.3 U	< 4.0 U	< 13 U	< 13 U	< 20 U	< 17 U
cis-1,2-Dichloroethene	µg/L	9.9	580	0.72 J	470	66	130	6.4 J	5.1 J	370	4.4 J
Ethylbenzene	µg/L	< 1.0 U	< 20 U	< 1.0 U	< 13 U	< 3.3 U	< 4.0 U	< 13 U	< 13 U	< 20 U	< 17 U
Tetrachloroethene	µg/L	< 1.0 U	57	0.63 J	13	17	22	520	540	620	430
Toluene	µg/L	< 1.0 U	< 20 U	< 1.0 U	< 13 U	< 3.3 U	< 4.0 U	< 13 U	< 13 U	< 20 U	< 17 U
trans-1,2-Dichloroethene	µg/L	1.9	21	0.69 J	17	11	5.3	< 13 U	< 13 U	3.8 J	< 17 U
Trichloroethene	µg/L	19	33	0.41 J	320	59	180	510	500	810	720
Vinyl chloride	µg/L	6.2	840	0.57 J	52	7.7	1.0 J	< 13 U	< 13 U	11 J	< 17 U
Xylene (total)	µg/L	< 2.0 U	< 40 U	< 2.0 U	< 25 U	< 6.7 U	< 8.0 U	< 25 U	< 25 U	< 40 U	< 33 U
Total VOCs	µg/L	54	1531	5.12	891.5	183.9	343.5	1036.4	1045.1	1814.8	1154.4

µg/L - Micrograms per Liter.

< - Constituent not detected above
laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above.
laboratory reporting limit shown.

QA/QC - Quality Assurance/Quality Control.

ARCADIS

Table C-1. Summary of Groundwater VOC Analytical Results with QA/QC from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

	Units	On-Site					
		W-2-N 9/28/2011 Upper Aquifer	W-3-N 9/28/2011 Upper Aquifer	W-4-N 9/28/2011 Upper Aquifer	W-2-S 9/29/2011 Upper Aquifer	W-3-S 9/29/2011 Upper Aquifer	W-4-S 9/29/2011 Upper Aquifer
<u>Volatile Organic Compounds</u>							
1,1,1-Trichloroethane	µg/L	< 1.0 U	< 2.5 U	< 1.0 U	1.6	0.51 J	1.1
1,1-Dichloroethane	µg/L	< 1.0 U	< 2.5 U	2.4	1.2	0.38 J	1.5
1,1-Dichloroethene	µg/L	< 1.0 U	< 2.5 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Benzene	µg/L	< 1.0 U	< 2.5 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	1.4	53	9.7	< 1.0 U	0.72 J	8.9
Ethylbenzene	µg/L	< 1.0 U	< 2.5 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	< 1.0 U	0.94 J	1.1	0.44 J	2.8	31
Toluene	µg/L	< 1.0 U	< 2.5 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	< 1.0 U	0.80 J	0.59 J	< 1.0 U	0.19 J	1.4
Trichloroethene	µg/L	< 1.0 U	< 2.5 U	9.9	7.1	2.6	21
Vinyl chloride	µg/L	< 1.0 U	2.7	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Xylene (total)	µg/L	< 2.0 U	< 5.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	1.4	57.4	23.7	10.3	7.2	64.9

µg/L - Micrograms per Liter.

< - Constituent not detected above
laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above.
laboratory reporting limit shown.

QA/QC - Quality Assurance/Quality Control.

ARCADIS

Table C-1. Summary of Groundwater VOC Analytical Results with QA/QC from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

		Downgradient of the Site									
		GM-2	GM-6	GM-8	GM-16	GM-26	Duplicate	GM-47	GM-50	GM-52	GM-55
	Units	9/29/2011	9/29/2011	9/29/2011	9/29/2011	9/28/2011	9/28/2011	9/29/2011	9/30/2011	9/29/2011	9/28/2011
		Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer	QA/QC	Upper Aquifer	Upper Aquifer	Upper Aquifer	Upper Aquifer
Volatile Organic Compounds											
1,1,1-Trichloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 3.3 U	< 1.0 U	< 1.0 U	< 2.5 U	1.7 J	< 4.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	0.92 J	4.5	1.9	5.5	< 1.0 U	< 1.0 U	2.9	2.3	1.9 J	< 1.0 U
1,1-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 3.3 U	< 1.0 U	< 1.0 U	< 2.5 U	< 2.0 U	< 4.0 U	< 1.0 U
Benzene	µg/L	< 1.0 U	1.0	3.5	< 3.3 U	< 1.0 U	< 1.0 U	< 2.5 U	< 2.0 U	< 4.0 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	9.0	3.7	< 1.0 U	23	< 1.0 U	< 1.0 U	34	7.1	4.2	< 1.0 U
Ethylbenzene	µg/L	< 1.0 U	< 1.0 U	5.4	< 3.3 U	< 1.0 U	< 1.0 U	< 2.5 U	< 2.0 U	< 4.0 U	< 1.0 U
Tetrachloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	64	1.6	1.5	52	95	73	6.1
Toluene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 3.3 U	< 1.0 U	< 1.0 U	< 2.5 U	< 2.0 U	< 4.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	< 1.0 U	0.84 J	0.20 J	0.77 J	< 1.0 U	< 1.0 U	2.3 J	0.62 J	< 4.0 U	< 1.0 U
Trichloroethene	µg/L	0.75 J	< 1.0 U	< 1.0 U	45	< 1.0 U	< 1.0 U	18	86	38	< 1.0 U
Vinyl chloride	µg/L	0.69 J	1.5	0.24 J	1.2 J	< 1.0 U	< 1.0 U	< 2.5 U	< 2.0 U	< 4.0 U	< 1.0 U
Xylene (total)	µg/L	< 2.0 U	< 2.0 U	0.99 J	< 6.7 U	< 2.0 U	< 2.0 U	< 5.0 U	< 4.0 U	< 8.0 U	< 2.0 U
Total VOCs	µg/L	11.4	11.5	12.2	139.5	1.6	1.5	109.2	192.7	117.1	6.1

µg/L - Micrograms per Liter.

< - Constituent not detected above
laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above.
laboratory reporting limit shown.

QA/QC - Quality Assurance/Quality Control.

ARCADIS

Table C-1. Summary of Groundwater VOC Analytical Results with QA/QC from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

	Units	Downgradient of the Site				
		GM-65S	GM-79	GM-78	GM-80	TW-2
		9/28/2011 Upper Aquifer	9/28/2011 Upper Aquifer	9/29/2011 Upper Aquifer	9/28/2011 Upper Aquifer	9/28/2011 Upper Aquifer
<u>Volatile Organic Compounds</u>						
1,1,1-Trichloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	0.16 J	0.22 J	< 1.0 U	0.47 J	1.8
1,1-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Benzene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	1.2
cis-1,2-Dichloroethene	µg/L	< 1.0 U	0.19 J	< 1.0 U	2.7	5.7
Ethylbenzene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.45 J
Tetrachloroethene	µg/L	7.8	0.34 J	4.3	4.1	1.2
Toluene	µg/L	< 1.0 U	< 1.0 U	0.18 J	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	0.24 J	0.25 J
Trichloroethene	µg/L	2.3	1.3	< 1.0 U	5.9	5.9
Vinyl chloride	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	1.1
Xylene (total)	µg/L	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	10.3	2.1	4.5	13.4	17.6

µg/L - Micrograms per Liter.

< - Constituent not detected above
laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above.
laboratory reporting limit shown.

QA/QC - Quality Assurance/Quality Control.

ARCADIS

Table C-1. Summary of Groundwater VOC Analytical Results with QA/QC from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

		Upgradient of Site HR-12 9/28/2011 Lower Aquifer	HR-15 9/28/2011 Lower Aquifer	GM-19D 9/29/2011 Lower Aquifer	On-Site GM-54 9/29/2011 Lower Aquifer	Duplicate 9/29/2011 QA/QC	GM-68D 9/30/2011 Lower Aquifer
	Units						
<u>Volatile Organic Compounds</u>							
1,1,1-Trichloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 4.0 U	< 4.0 U	< 1.7 U
1,1-Dichloroethane	µg/L	2.8	< 1.0 U	< 1.0 U	< 4.0 U	< 4.0 U	< 1.7 U
1,1-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 4.0 U	< 4.0 U	< 1.7 U
Benzene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 4.0 U	< 4.0 U	< 1.7 U
cis-1,2-Dichloroethene	µg/L	1.6	3.5	1.7	< 4.0 U	< 4.0 U	1.5 J
Ethylbenzene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 4.0 U	< 4.0 U	< 1.7 U
Tetrachloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	83	90	62
Toluene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 4.0 U	< 4.0 U	< 1.7 U
trans-1,2-Dichloroethene	µg/L	0.24 J	< 1.0 U	< 1.0 U	< 4.0 U	< 4.0 U	< 1.7 U
Trichloroethene	µg/L	< 1.0 U	0.78 J	1.8	2.6 J	2.8 J	13
Vinyl chloride	µg/L	< 1.0 U	2.4	8.6	< 4.0 U	< 4.0 U	< 1.7 U
Xylene (total)	µg/L	< 2.0 U	< 2.0 U	< 2.0 U	< 8.0 U	< 8.0 U	< 3.3 U
Total VOCs	µg/L	4.6	6.7	12.1	85.6	92.8	76.5

µg/L - Micrograms per Liter.

< - Constituent not detected above
laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above.
laboratory reporting limit shown.

QA/QC - Quality Assurance/Quality Control.

ARCADIS

Table C-1. Summary of Groundwater VOC Analytical Results with QA/QC from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

		On-Site	Downgradient of the Site						
		GM-75D	GM-9	GM-11	GM-15	GM-20D	GM-83D	GM-84	DN-13
	Units	9/30/2011	9/28/2011	9/28/2011	9/29/2011	9/28/2011	9/28/2011	9/29/2011	9/28/2011
		Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer	Lower Aquifer
Volatile Organic Compounds									
1,1,1-Trichloroethane	µg/L	< 4.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	< 4.0 U	0.50 J	< 1.4 U	1.1	< 1.0 U	< 1.0 U	< 1.0 U	1.5
1,1-Dichloroethene	µg/L	< 4.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Benzene	µg/L	< 4.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	12	1.0	< 1.4 U	1.1	< 1.0 U	< 1.0 U	< 1.0 U	6.3
Ethylbenzene	µg/L	< 4.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	200	< 1.0 U	1.1 J	< 1.0 U	2.2	< 1.0 U	< 1.0 U	0.40 J
Toluene	µg/L	< 4.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	< 4.0 U	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	0.38 J
Trichloroethene	µg/L	180	13	24	4.7	5.0	< 1.0 U	5.7	4.8
Vinyl chloride	µg/L	2.1 J	< 1.0 U	< 1.4 U	< 1.0 U	< 1.0 U	1.8	< 1.0 U	1.3
Xylene (total)	µg/L	< 8.0 U	< 2.0 U	< 2.9 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	394.1	14.5	25.1	6.9	7.2	1.8	5.7	14.7

µg/L - Micrograms per Liter.

< - Constituent not detected above
laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above.
laboratory reporting limit shown.

QA/QC - Quality Assurance/Quality Control.

ARCADIS

Table C-1. Summary of Groundwater VOC Analytical Results with QA/QC from Upper/Lower Aquifer Monitoring Wells in 2011, RACER Trust, Moraine, Ohio.

	Units	QA/QC					
		Equipment Blank 9/29/2011 QA/QC	Equipment Blank 9/30/2011 QA/QC	Equipment Blank 10/5/2011 QA/QC	Trip Blank 9/29/2011 QA/QC	Trip Blank 9/30/2011 QA/QC	Trip Blank 10/5/2011 QA/QC
<u>Volatile Organic Compounds</u>							
1,1,1-Trichloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Benzene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Ethylbenzene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Toluene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	0.35 J	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Trichloroethene	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Vinyl chloride	µg/L	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Xylene (total)	µg/L	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	0	0	0	0.35	0	0

µg/L - Micrograms per Liter.

< - Constituent not detected above
laboratory reporting limit shown.

J - Value is estimated.

U - Constituent not detected above.
laboratory reporting limit shown.

QA/QC - Quality Assurance/Quality Control.



Appendix D

In-Situ Reactive Zones Performance
Results for 2011

In-Situ Reactive Zones Performance Results

As described in Section 1.4 of the Site-Wide Groundwater Monitoring Report for 2011 (Monitoring Report), the carbon solution delivery network consisted of three reactive zones, RZ-1, RZ-3 (East and West) and RZ-4 (East). During 2011, a carbon solution was introduced into the groundwater through introduction wells at RZ-1, RZ-3 (East and West), and RZ-4 (East) shown on Figures 3, and 4 of the Monitoring Report, respectively. RZ-1 was originally installed in 1999 as a nine well barrier downgradient of the Former Oil House Area source area, and then based on the performance of the enhanced reductive dechlorination (ERD) technology, RZ-1 was expanded into portions of the Former Oil House Area source area by the addition of 12 introduction wells in 2002. RZ-3 was originally installed in 1999 and has been operated as a cut-off barrier (30 wells in RZ-3 East and 11 wells in RZ-3 West) to mitigate further downgradient VOC migration. In 2005, RZ-3 East was modified by the addition of 5 introduction wells (RZ-3RR through RZ-3VV) and cessation of introduction in 5 existing wells (RZ-3MM through RZ-3QQ) to improve performance at the far eastern edge of the plume. Using data obtained from the Supplemental Groundwater Investigation conducted in 2006, RZ-4 was designed and installed to address VOC concentrations present on the western side of the plume. RZ-4 consists of 15 introduction wells, 7 wells in RZ-4 West and 8 wells in RZ-4 East. The RZ-4 West wells are located in the southeast corner of the closed South Settling Lagoon and the RZ-4 East wells are located north of Landfill L1 and west of the Waste Pile/Staging Area. Introductions to RZ-4 began in August 2006. RZ-4 West was not in operation in 2011. The following sections discuss the monitoring completed to assess the effectiveness of the in-situ reactive zones and the results of this monitoring.

Reactive Zone Monitoring

Operation of the reactive zones was monitored through the collection of field parameter measurements and laboratory analyses of biogeochemical indicator parameters and volatile organic compounds (VOCs), according to the Site-Wide Groundwater Monitoring Plan (ARCADIS G&M, Inc. 2002). Field parameter measurements included: pH, specific conductivity, dissolved oxygen (DO), oxidation-reduction potential (ORP), and temperature. Biogeochemical parameters included manganese (total and dissolved), iron (total and dissolved), sulfate, sulfide, total organic carbon (TOC), chlorides, light hydrocarbons (ethane and ethene), and methane. The monitored VOCs included: benzene, toluene, ethylbenzene, xylenes, tetrachloroethene (PCE), trichloroethene (TCE), cis-1,2-dichloroethene (cis-1,2-DCE), vinyl chloride, 1,1,1-trichloroethane (1,1,1-TCA), 1,1-dichloroethane (1,1-DCA), 1,1-dichloroethene (1,1-DCE), and trans-1,2-dichloroethene (trans-1,2-DCE). The VOC data collected are presented in Tables D-1 through D-4 of this appendix. The bioattenuation parameter data is presented on Tables D-5 through D-8. An evaluation of pertinent monitoring data is presented in the following sections.

The operational monitoring data collected, as indicated above, can be broadly categorized as: (i) “primary” operational monitoring data, which tracks the actual operation of the remediation system and determines whether the operation is proceeding as planned, and (ii) “secondary” operational monitoring data, which assists in the occasional troubleshooting of the system. The

secondary data becomes important in the event that degradation of the VOCs is not proceeding as expected, and the cause cannot be determined from the primary operational monitoring data. The primary operational monitoring data includes pH, TOC, VOCs, ethene, ethane, and methane. Secondary operational monitoring data includes dissolved manganese, dissolved iron, sulfate, and ORP. The primary operational data for select monitoring wells is discussed below and presented graphically on Figures D-1 through D-3.

The purpose of upgradient and downgradient monitor wells, separate from the introduction wells within the reactive zones, is to collect and compare data before and after biodegradation by the stimulated microbial population. Locations of these wells are shown on Figures 3 and 4 of the Monitoring Report.

- At RZ-1, GM-29 is designated as the upgradient monitoring well, while GM-28 is designated as the downgradient monitor well. These wells are ideally positioned, relative to estimated groundwater travel time, approximately 100 days upgradient and 100 days downgradient from the original introduction wells installed to create the RZ-1 introduction zone (line of nine introduction wells, RZ-1A through 1I, placed in an East-West direction). GM-29 is located within the area of the RZ-1 expansion wells (twelve introduction wells placed in two rows north of the original nine wells, RZ-1J through 1U). Therefore, GM-23 is also used as an upgradient monitoring well because this well is located within the source area.
- For RZ-3 West, monitor well GM-19S is used as the upgradient well. It should be noted that as of August 2006, GM-19S is the downgradient monitoring well for RZ-4 East. At RZ-3 West, GM-32, which is within the introduction zone due to its location being constrained by the proximity of Landfill L1, is designated as the downgradient monitor well. Monitoring well GM-32 is only analyzed for TOC, as this well is located in the early stages of the reactive zone due to its proximity to the introduction wells. Annual data collected from GM-8 and GM-6 (VOCs only), which are further downgradient from the introduction zone and located along the west side of Landfill L1, have also been evaluated with respect to monitoring the performance of RZ-3 West. At RZ-3 West, carbon solution is introduced in thirty wells, RZ-3A through RZ-3DD.
- For RZ-3 East, GM-22 is designated as the upgradient monitor well and GM-21 is designated as the downgradient monitor well. At RZ-3 East, carbon solution is introduced in the original wells, RZ-3GG through RZ-3KK, and five additional wells, RZ-3RR through RZ-3VV.
- For RZ-4 East monitoring well GM-19S is used as the downgradient monitoring well. For RZ-4 West monitoring well pair GM-63 and GM-64 are used as the downgradient monitoring wells. This well pair has screened intervals in the intermediate and deep portions of the upper aquifer.

During 2011, a target volume of 800 gallons of 5 percent molasses solution was injected into the introduction wells at RZ-1 during February through December. The introduction wells at RZ-3

West (RZ-3A through RZ-3DD) received a target volume of approximately 1,600 gallons of 2 percent molasses solution in the months of February through December. RZ-3 East introduction wells RZ-3GG through RZ-3KK received a target volume of approximately 1,600 gallons of 2 percent molasses solution in February through December. The RZ-3 East replacement wells (RZ-3RR through RZ-3VV) received a target volume of approximately 1,600 gallons of 2 percent molasses solution in the same months as RZ-3GG through RZ-3KK in 2010. A target volume of 3,000 gallons of 2 percent molasses solution was injected into the RZ-4 East wells in February through December. Table 2 in the Monitoring Report presents the carbon solution introduction volumes for different introduction wells in 2011.

Analysis of Primary Operational Monitoring Data

The primary operational data is comprised of a limited number of variables that are monitored at a frequency necessary to supply the information required for the operation of the remediation system. The entire data set is presented in Tables D-1 through D-8. These tables are organized such that upgradient and downgradient changes can be easily identified for each reactive zone from 1999 to 2011. Figures D-1 through D-3 present the primary operational data (pH, TOC, methane, VOCs, ethane, and ethene) graphically for monitoring wells used for monitoring the effectiveness of each of the IRZs (GM-23, GM-29, GM-28, GM-8, GM-21, and GM-19S). The graphs are organized to allow a simple comparison of the trends in each monitoring well for pH, TOC, methane, VOCs, ethene, ethane, and total parent-daughter compound molarity. A discussion of the primary operational data is provided below.

pH

The preferred pH range for reductive dechlorination is between 6 and 8, and the acceptable pH range extends from 5 to 9. All pH measurements collected in 2011 from upgradient and downgradient monitoring wells were within the acceptable pH range.

Total Organic Carbon/Methane

At RZ-1, the reductive dechlorination process is continuing effectively even though the TOC levels at the designated downgradient well, GM-28, is 9.1 mg/L which is at background levels. Considering the differences in the VOC concentrations at the upgradient wells GM-29 and GM-23, and the VOC concentrations at GM-28, the RZ is performing as an effective barrier, reducing the total target VOC concentrations from 891.5 micrograms per liter ($\mu\text{g/L}$) in GM-29 and 1531 $\mu\text{g/L}$ in GM-23 to 5.12 $\mu\text{g/L}$ at GM-28. Based on the TOC values in the RZ-1 injectate, the carbon was consumed rapidly by an active soil microbial community. Methane concentrations in GM-28 continue to be sustained above background concentrations, which provides evidence that methanogenesis is occurring and that the desired reducing conditions are being sustained in the reactive zone. Methane concentrations in GM-29 remain above the background levels observed in this monitoring well in the 1999 sampling before the start of carbon introductions.

Concentrations of TOC and methane observed at further downgradient wells were above background levels in GM-8 in 2011. Concentrations of TOC observed in groundwater samples collected from GM-21, which is the downgradient well for RZ-3 East, were above background levels along with dissolved methane concentrations indicating that the groundwater is anaerobic at GM-21.

Analytical results from GM-19S, the downgradient monitoring well for RZ-4 East, exhibit a common ERD signature. An initial spike in TOC (September 2006 sampling event) above background concentrations followed by a spike in total parent-daughter ethene molarity (indicating that target compounds may have been de-sorbed from the aquifer soil-matrix), and increasing methane concentrations indicating that the carbon substrate loading is adequate to support methanogenesis and reductive dechlorination. Concentrations of TOC and methane in 2011 were below levels observed in 2010.

VOC Analytical Results

The groundwater analytical data for the site-specific list of VOCs are presented in Table D-1 for RZ-1, Table D-2 for RZ-3 West, Table D-3 for RZ-3 East, and Table D-4 for RZ-4 East in the Monitoring Report. Additionally, the degradation of PCE and TCE (parent compounds) to cis-1,2-DCE, vinyl chloride (daughter products), and ethene and ethane (end products) are provided with the pH, TOC, and methane data for the upgradient and downgradient monitor wells in RZ-1 (GM-23, GM-29, and GM-28 Figure D-1), RZ-3 West (GM-8 Figure D-2), RZ-3 East (GM-21 Figure D-2), and RZ-4 East (GM-19S Figure D-3).

The following bullets summarize the observations and trends evident among the reactive zones at the Moraine Facilities which indicate that enhanced reduction of the targeted chlorinated VOCs is progressing as a result of the carbon introduction process:

- Comparing the 2011 profiles of chlorinated compounds in the upgradient and downgradient wells in RZ-1, it is observed that degradation of the chlorinated VOCs was sustained throughout 2011. The total chlorinated VOC concentrations in GM-29 have decreased in 2011 as compared to 2010 (1,107 µg/L in 2010 and 891.5 µg/L in 2011). Total chlorinated VOC concentrations in GM-23 decreased from 7,792 µg/L in 2007 to 4,229 µg/L in 2008 to 2,263 µg/L in 2009 and to 1,073 µg/L in 2010; however, in 2011, total chlorinated VOC concentrations in GM-23 were 1,531 µg/L. This well is upgradient to the original RZ-1 barrier.
- Data from monitoring wells GM-8 and GM-6, which are located downgradient of RZ-3 West along the west side of Landfill L1, were considered to evaluate the effect of carbon introductions at RZ-3 West. Concentrations of total chlorinated VOCs at GM-8 remained steady in 2011 (12.2 µg/L) compared to 2010 (8.94 µg/L). Though GM-6 is located further downgradient, concentrations of PCE and TCE have consistently decreased since 1998 to 2009 with a slight increase in 2010. In 2011, PCE and TCE were below detection limits.

- Total chlorinated VOC concentrations in monitoring well GM-21, which is the downgradient monitor well for RZ-3 East, have remained significantly lower compared to baseline conditions since the installation of Reactive Zone introduction wells RZ-3RR through RZ-3VV. Concentration of TCE had a small increase from 3.2 µg/L in 2010 to 19 µg/L in 2011 but remains significantly below the maximum concentrations observed between the years 2000 and 2004.
- Data from monitoring well GM-19S, downgradient of RZ-4 East has exhibited a decreasing trend in total chlorinated VOC concentrations falling from 706.8 µg/L in September 2006 to 9.96 µg/L in September 2010, with a slight increase to 28.4 µg/L in 2011.
- The concentrations of VOCs at the influent to the air-stripper tower are being monitored on a monthly basis since the startup of the air stripper unit on January 31, 1996 (Figure 7 of the Monitoring Report). The first monitoring event was in February 1996, and the introduction of carbon in RZ-3 commenced in December 1999. On reviewing the data presented in Figure 7, it can be observed that the concentrations of VOCs in 2011 remained consistent with the 2010 monitoring data at low concentrations.

Conclusions

The following observations and conclusions can be made:

- Aquifer conditions were reducing within and downgradient of the reactive zones due to the introduction of carbohydrate, as evidenced by the field parameters and biogeochemical data;
- The target compounds (PCE and TCE) were reduced to daughter products (cis-1,2-DCE and vinyl chloride) and ultimately to end products (ethene and ethane) based on the VOC and light hydrocarbon data; and
- Enhanced reductive dechlorination continued to achieve the desired reduction of VOC concentrations in groundwater.

Table D-1. Summary of Annual Groundwater Analytical Results from Reactive Zone 1 Wells, RACER Trust, Moraine, Ohio

RZ-1		Sidegradient Well																			
Constituents	Units	GM-29																			
<u>Volatile Organic Compounds</u>		9/1/99	2/22/00	5/26/00	9/21/00	3/20/01	6/26/01	11/13/01	12/12/01	6/13/02	9/25/02	5/22/03	9/24/03	9/15/04	10/17/05	9/28/06	9/26/07	10/6/08	11/17/09	9/29/10	9/30/11
1,1,1-Trichloroethane	µg/L	37.8	36.0	32.5	24.5	27.0	23.8J	<50	19J	17	16J	< 50	18J	21 J	19 J	17 J	15 J	12 J	18	11 J	11 J
1,1-Dichloroethane	µg/L	4.3	4.1	6.3	16.6	10.8	6.3J	<50	<50	<50	<40	< 50	<33	< 50 U	18 J	15 J	15 J	11 J	12	11 J	8.5 J
1,1-Dichloroethene	µg/L	1.3	1.1	1.6	3.1	3.5	3.0J	<50	<50	<50	<40	< 50	<33	< 50 U	< 50 U	< 33 U	< 50 U	< 33 U	< 10 U	< 20 U	< 13 U
Benzene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0UJ	<50	<50	<50	<40	< 50	<33	< 50 U	< 50 U	< 33 U	< 50 U	< 33 U	< 10 U	< 20 U	< 13 U
cis-1,2-Dichloroethene	µg/L	320	223	1,190J	2,871	2,170	2,050J	1,800	1,800	1,600	1,300	950	1,200	1,200	1,600	1,300	1,200	900	600	660	470
Ethylbenzene	µg/L	<1.0	1.4	<1.0	<1.0	<1.0	<1.0UJ	21J	<50	<50	<40	< 50	<33	< 50 U	< 50 U	< 33 U	< 50 U	< 33 U	< 10 U	< 20 U	< 13 U
Tetrachloroethene	µg/L	<20	38.7	24.6	20.0	24.4	24.8J	17J	22J	22	18J	47J	18J	20 J	15 J	15 J	18 J	17 J	21 J	17 J	13
Toluene	µg/L	<1.0	<1.0	<1.0	2.2	<1.0	<1.0UJ	<50	<50	<50	<40	< 50	<33	< 50 U	< 50 U	< 33 U	< 50 U	< 33 U	< 10 U	< 20 U	< 13 U
trans-1,2-Dichloroethene	µg/L	11.1	9.1	8.9	14.4	20.4	25.6J	26	24J	21	21	< 25	20	21 J	27 J	20 J	19 J	16 J	20	19 J	17
Trichloroethene	µg/L	878	758	649J	289	354	437J	270	320	380	310	280	390	440	390	310	350	300	370	330	320
Vinyl chloride	µg/L	3.8	1.0	1.7	788	362	276J	230	280	140	140	99	150	230	490	210	290	150	70	59	52
Xylenes	µg/L	<1.0	6.0	<1.0	<1.0	<1.0	<1.0UJ	52	<50	<50	<40	< 50	<33	< 50 U	< 100 U	< 67 U	< 100 U	< 67 U	< 20 U	< 40 U	< 25 U
Total VOCs	µg/L	1,256.3	1,078.4	1,914.6	4,028.8	2,972.1	2,846.5	2,416	2,465	2,180	1,805	1,376	1,796	1,932	2,559	1,887	1,907	1,406	1,111	1,107	891.5

µg/L - Micrograms per Liter.
J - Value is estimated.
UJ - Constituent not detected above laboratory reporting limit; reporting limit estimated.
< - Constituent not detected above laboratory reporting limit shown.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September and October 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-1. Summary of Annual Groundwater Analytical Results from Reactive Zone 1 Wells, RACER Trust, Moraine, Ohio

RZ-1		Upgradient Well GM-23																			
Constituents	Units	9/2/99	2/21/00	5/31/00	9/20/00	3/20/01	6/26/01	11/12/01	12/12/01	6/13/02	9/26/02	5/22/03	9/23/03	9/14/04	10/17/05	9/28/06	9/27/07	10/23/08	11/17/09	9/29/10	9/30/11
<u>Volatile Organic Compounds</u>																					
1,1,1-Trichloroethane	µg/L	7.2	< 50	< 20	2.0	3.1	1.5	< 420	< 500	< 330	< 400	< 620 U	< 500 U	< 500 U	< 560 U	< 330 U	< 200 U	< 62 U	< 20 U	< 22 U	< 20 U
1,1-Dichloroethane	µg/L	32.5	< 50	12.8 J	16.3	17.9	3.7	< 420	< 500	< 330	< 400	< 620 U	< 500 U	< 500 U	< 560 U	< 330 U	< 200 U	< 62 U	5.0 J	< 22 U	< 20 U
1,1-Dichloroethene	µg/L	17.2	<50	6.6 J	5.1	15.9	16.3	< 420	< 500	< 330	< 400	< 620 U	< 500 U	< 500 U	< 560 U	< 330 U	< 200 U	< 62 U	< 20 U	< 22 U	< 20 U
Benzene	µg/L	1.9	< 50	< 20	< 1.0	1.4	< 1.0	< 420	< 500	< 330	< 400	< 620 U	< 500 U	< 500 U	< 560 U	< 330 U	< 200 U	< 62 U	< 20 U	< 22 U	< 20 U
cis-1,2-Dichloroethene	µg/L	7,530	10,400 D	4,080 J	5,620	9,640	11,000	8,400	7,200	9,900	7,700	6,800	5,800	4,600	19,000	11,000	4,700	2,000	1,100	490	580
Ethylbenzene	µg/L	< 1.0	<50	< 20	< 1.0	<1.0	< 1.0	< 420	< 500	< 330	< 400	< 620 U	< 500 U	< 500 U	< 560 U	< 330 U	< 200 U	< 62 U	< 20 U	< 22 U	< 20 U
Tetrachloroethene	µg/L	6,250	7,280 J	6,200 J	3,470	2,910	8,600	15,000	14,000	8,400	10,000	12,000	12,000	6,700	2,300	370	280	71	19 J	50	57
Toluene	µg/L	<1.0	< 50	< 20	< 1.0	< 1.0	2.3	< 420	< 500	< 330	< 400	< 620 U	< 500 U	< 500 U	< 560 U	< 330 U	< 200 U	< 62 U	< 20 U	< 22 U	< 20 U
trans-1,2-Dichloroethene	µg/L	54.5	118 J	39.8 J	33.2	85.5	60.8	<210	< 250	<170	< 200	< 310 U	< 250 U	< 250 U	< 560 U	270 J	130 J	58 J	31	16 J	21
Trichloroethene	µg/L	1,460	1,350 D	1,480 J	609	745	1,780 J	2,200	2,100	1,900	1,700	1,500	1,600	1,100	490 J	95 J	82 J	< 62 U	8.3 J	17 J	33
Vinyl chloride	µg/L	2,500	2,420 J	140 J	801	765	68	1200	< 500	810	540	1700	690	870	2,800	4,100	2,600	2,100	1,100	500	840
Xylenes	µg/L	< 1.0	< 50	< 20	< 1.0	< 1.0	1.4	< 420	< 500	< 330	< 400	< 620 U	< 500 U	< 500 U	< 1100 U	< 670 U	< 400 U	< 120 U	< 40 U	< 44 U	< 40 U
Total VOCs	µg/L	17,853.3	21,568	11,959.2	10,556.6	14,183.8	21,533.8	26,800	23,300	21,010	19,940	22,000	20,090	13,270	24,590	15,835	7,792	4,229	2,263	1,073	1,531

µg/L - Micrograms per Liter.
J - Value is estimated.
UJ - Constituent not detected above laboratory reporting limit; reporting limit estimated.
< - Constituent not detected above laboratory reporting limit shown.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September and October 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-1. Summary of Annual Groundwater Analytical Results from Reactive Zone 1 Wells, RACER Trust, Moraine, Ohio

RZ-1		Downgradient Well																				
Constituents	Units	GM-28																				
Volatile Organic Compounds		9/1/99	2/23/00	5/26/00	9/21/00	3/20/01	6/26/01	11/15/01	12/12/01	7/21/02	9/24/02	5/23/03	10/1/03	4/30/04	9/15/04	10/18/05	9/27/06	9/20/07	10/22/08	11/16/09	9/28/10	10/5/11
1,1,1-Trichloroethane	µg/L	17.7	23.2	18.1	5.0	<1.0	<1.0	<10	<5.0UJ	<4.0	<1	< 1	<1.0	< 1	< 1 U	< 1.0 U	< 1 U	< 1 U	< 5 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	3.3	4.2	11.8	9.9	<1.0	<1.0	<10	<5.0UJ	<4.0	2.7	4.2	3.3	3.5	3.3	4.0	4.2	4.6	2.2 J	3.6	4.6	2.1
1,1-Dichloroethene	µg/L	<1.0	<1.0	3.8	<1.0	<1.0	<1.0	<10	<5.0UJ	<4.0	<1	< 1	<1.0	< 1	< 1 U	< 1.0 U	< 1 U	< 1 U	< 5 U	< 1.0 U	< 1.0 U	< 1.0 U
Benzene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<10	<5.0UJ	<4.0	<1	< 1	<1.0	< 1	< 1 U	< 1.0 U	< 1 U	< 1 U	< 5 U	< 1.0 U	< 1.0 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	175	503	2,700	37.0	7.7	352	<5.0	2.2UJ	<2.0	1.1	0.66	0.58	0.45 J	0.41 J	0.32 J	0.26 J	0.72 J	6.9	2.3	2.1	0.72 J
Ethylbenzene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<10	<5.0UJ	<4.0	<1	< 1	0.28J	< 1	< 1 U	< 1.0 U	< 1 U	< 1 U	< 5 U	< 1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	316	88.4	30.2	2.3	2.8	<1.0	<10	<5.0UJ	<4.0	<1	0.95J	<1.0	< 1	0.88 J	< 1.0 U	< 1 U	< 1 U	< 5 U	< 1.0 U	< 1.0 U	0.63 J
Toluene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<10	< 1.8UJ	<4.0	<1.3	1	1.0	< 1	< 1 U	< 1.0 U	< 1 U	< 1 U	< 5 U	< 1.0 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	9.2	9.7	36.5	22.3	17.6	<1.0	11	11J	8.6	11	9.2	4.0	2.2	1.2	0.63 J	0.66 J	0.58 J	1.3 J	1.7	1.5	0.69 J
Trichloroethene	µg/L	768	833	14.8	1.6	1.8	<1.0	<10	<5.0UJ	<4.0	0.86J	3.1	1.6	1.6	1.4	0.66 J	0.43 J	0.51 J	< 5 U	0.58 J	< 1.0 U	0.41 J
Vinyl chloride	µg/L	3.2	<1.0	1.9	12.4	2.6	<1.0	<10	<5.0UJ	<4.0	<1	< 1	0.53J	< 1	0.44 J	1.1	0.42 J	1.2	6.5	3.3	2.2	0.57 J
Xylenes	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<10	<5.0UJ	<4.0	<1.2	0.87J	1.6	< 1	< 1 U	< 2.0 U	< 2 U	< 2 U	< 10 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	1,292.4	1,461.5	2,817.1	90.5	32.5	352	11	11	8.6	15.66	19.98	12.89	7.75	7.63	6.71	5.97	7.61	16.9	11.48	10.4	5.12

µg/L - Micrograms per Liter.
J - Value is estimated.
UJ - Constituent not detected above laboratory reporting limit; reporting limit estimated.
< - Constituent not detected above laboratory reporting limit shown.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September and October 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

ARCADIS

Table D-2. Summary of Annual Groundwater Analytical Results form Reactive Zone 3 West Wells, RACER Trust, Moraine, Ohio.

RZ-3 West		Upgradient Well EAST														
Constituents	Units	9/21/99	2/23/00	5/25/00	9/22/00	3/19/01	6/25/01	11/12/01	12/11/01	6/12/02	9/23/02	5/21/03	9/25/03	9/13/04	10/18/05	9/21/06
Volatile Organic Compounds																
1,1,1-Trichloroethane	µg/L	21.0	20.6	20.5	22.2	19.3	16.7	13	12	14	10	6.2	7.1	5.7	5.9	10
1,1-Dichloroethane	µg/L	5.4	7.3	7.7	7.7	5.9	5.5	6.2	5.3	6.0	3.9	1.9	2.3	0.72 J	3.0	3.2
1,1-Dichloroethene	µg/L	<1.0	<1.0	1.02J	1.2	1.2	<1.0	0.90J	<3.3	1.3	0.73J	< 1.4	<2.0	0.34 J	< 1.0 U	0.59 J
Benzene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<3.3	<3.3	<2.5	<2	< 1.4	<2.0	< 1 U	< 1.0 U	< 1.4 U
cis-1,2-Dichloroethene	µg/L	9.1	24.0	32.0	77.3	117	80.1	51	51	33	8.8	4.5	4.3	1.6	3.1	4.1
Ethylbenzene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<3.3	<3.3	<2.5	<2	< 1.4	<2.0	< 1	< 1.0 U	< 1.4 U
Tetrachloroethene	µg/L	61.0	77.1	54.6	55.8	49.9	59.3	56	49	37	49	42	47	40	47	41
Toluene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<3.3	<3.3	<2.5	<2	< 1.4	<2.0	< 1 U	< 1.0 U	< 1.4 U
trans-1,2-Dichloroethene	µg/L	<1.0	2.0	1.5	1.8	5.8	3.3	2.7	2.4	1.3	<1	< 0.72	<1.0	< 0.5 U	< 1.0 U	< 1.4 U
Trichloroethene	µg/L	56.1	90.1	81.3	97.2	105	117	92	94	75	46	29	35	23	23	29
Vinyl chloride	µg/L	<1.0	5.3	1.2	3.0	4.8	<1.0	1.5J	0.66J	0.48	<2	< 1.4	<2.0	< 1 U	1.2	< 1.4 U
Xylenes	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<3.3	<3.3	<2.5	<2	< 1.4	<2.0	< 1 U	< 2.0 U	< 2.9 U
Total VOCs	µg/L	152.6	226.4	199.82	266.2	308.9	281.9	223.3	214.36	168.08	118.43	83.6	95.7	71.36	83.2	87.89

µg/L - Micrograms per Liter.
J - Value is estimated.
UJ - Constituent not detected above laboratory reporting limit; reporting limit estimated.
< - Constituent not detected above laboratory reporting limit shown.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September and October 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-2. Summary of Annual Groundwater Analytical Results form Reactive Zone 3 West Wells, RACER Trust, Moraine, Ohio.

RZ-3 West		Downgradient Well GM-32																
Constituents	Units	9/22/99	2/28/00	5/30/00	9/25/00	3/19/01	6/25/01	11/12/01	12/11/01	6/12/02	9/20/02	5/23/03	10/1/03	9/14/04	10/19/05	9/19/06	9/18/07	9/23/08
Volatile Organic Compounds																		
1,1,1-Trichloroethane	µg/L	<1.0	<10	<100	<1.0	<50	9.2	<5.0	<100	<20	<10	< 1 U	<2.0	< 10 U	< 10 U	< 10 U	< 5 U	< 10 U
1,1-Dichloroethane	µg/L	3.3	101	46.0J	35.9	<50	3.1	6.2	<100	12	9.7J	5.5	5.5	3 J	4.9 J	3.7 J	4.3 J	4 J
1,1-Dichloroethene	µg/L	<1.0	<10	<100	<1.0	<50	<1.0	<5.0	<100	<20	<10	< 1 U	<2.0	< 10 U	< 10 U	< 10 U	< 5 U	< 10 U
Benzene	µg/L	<1.0	<10	<100	<1.0	<50	<1.0	4.3J	<100	4.0	<10	1.6	1.5J	< 10 U	< 10 U	< 10 U	1.6 J	< 10 U
cis-1,2-Dichloroethene	µg/L	2.6	<10	<100	<1.0	<50	32.0	<2.5	<50	<10	<5	0.66	<1.0	< 5 U	< 10 U	< 10 U	< 5 U	< 10 U
Ethylbenzene	µg/L	<1.0	<10	<100	<1.0	<50	<1.0	0.79J	<100	<20	<10	0.65J	0.73J	< 10 U	< 10 U	< 10 U	< 5 U	< 10 U
Tetrachloroethene	µg/L	1.2	<10	<100	<1.0	<50	37.6	<5.0	<100	<20	<10	< 1 U	<2.0	< 10 U	< 10 U	< 10 U	< 5 U	< 10 U
Toluene	µg/L	1.0	20.6	<100	10.4	<50	<1.0	12	<100	4.9	<10	2.2	2.3	< 10 U	< 10 U	< 10 U	< 5 U	< 10 U
trans-1,2-Dichloroethene	µg/L	4.2	111	41.0J	20.3	<50	2.5	2.9	<50	3.0	<5	1.6	1.0	< 5 U	< 10 U	< 10 U	1 J	< 10 U
Trichloroethene	µg/L	3.2	<10	<100	<1.0	<50	107	<5.0	<100	<20	<10	< 1 U	<2.0	< 10 U	< 10 U	< 10 U	< 5 U	< 10 U
Vinyl chloride	µg/L	3.0	<10	<100	<1.0	<50	<1.0	1.1J	<100	3.0	<10	< 1 U	<2.0	< 10 U	< 10 U	< 10 U	< 5 U	< 10 U
Xylenes	µg/L	<1.0	<10	<100	<1.0	<50	<1.0	3.0J	<100	<20	<10	2.1	3.6	< 10 U	< 20 U	< 20 U	3.4 J	< 20 U
Total VOCs	µg/L	18.5	232.6	87	66.6	0	191.4	30.29	0	26.9	9.7	14.31	14.63	3	4.9	3.7	10.3	4

µg/L - Micrograms per Liter.
J - Value is estimated.
UJ - Constituent not detected above laboratory reporting limit; reporting limit estimated.
< - Constituent not detected above laboratory reporting limit shown.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September and October 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-2. Summary of Annual Groundwater Analytical Results form Reactive Zone 3 West Wells, RACER Trust, Moraine, Ohio.

RZ-3 West		Downgradient Well GM-8														Downgradient Well GM-6													
Constituents	Units	3/6/98	9/20/99	9/26/00	11/9/01	9/20/02	10/1/03	9/14/04	10/19/05	9/19/06	9/18/07	9/23/08	11/16/09	9/27/10	9/29/11	3/6/98	9/20/99	9/26/00	11/9/01	9/20/02	10/2/03	9/14/04	10/19/05	9/19/06	9/18/07	9/24/08	11/11/09	9/27/10	9/29/11
<u>Volatile Organic Compounds</u>																													
1,1,1-Trichloroethane	µg/L	6.7	1.9	<1.0	0.40J	<2.0	<2.0	< 1 U	< 1.0 U	< 5 U	< 2 U	< 1 U	<1.0 U	< 1.0 U	< 1.0 U	36.2	24.6	12.1	3.9	1.4J	0.19J	< 1 U	< 1.0 U	< 1 U	< 1 U	< 1 U	<1.0 U	< 1.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	49.3	30.2	36.5	40	63	48	15	16	18	9.1	1.7	2.9	3	1.9	35.3	33.2	13.0	14	60	20	18	21	16	26	< 8.4 U	6.9	6.2	4.5
1,1-Dichloroethene	µg/L	1.0	<1.0	<1.0	< 1.0	<2.0	<2.0	< 1 U	< 1.0 U	< 5 U	< 2 U	< 1 U	<1.0 U	< 1 U	< 1.0 U	<1.0	1.2	<1.0	< 2.0	<2.0	<1.0	< 1 U	< 1.0 U	< 1 U	< 1 U	< 1 U	<1.0 U	< 1 U	< 1.0 U
Benzene	µg/L	2.3	3.4	1.1	0.78J	5.5	5.4	4.2	3.5	2.1 J	2.4	6.8	3.9	4.7	3.5	<1.0	<1.0	<1.0	< 2.0	2.2	1.0	1.7	0.49 J	< 1 U	0.42 J	1.2	1.3	1.1	1.0
cis-1,2-Dichloroethene	µg/L	56.1	26.2	1.5	2.0	5.5	<1.0	< 0.5	0.24 J	2.1 J	< 2 U	< 1 U	<1.0 U	< 1.0 U	< 1.0 U	82.4	52.9	41.0	8.2	43	13	10	20	18	16	6.7	3.4	4.9	3.7
Ethylbenzene	µg/L	28.9	20.7	12.5	0.40J	7.5	11	19	29	< 5 U	1.7 J	8.6	5.5	0.33 J	5.4	<1.0	<10.0	<1.0	< 2.0	<2.0	0.22J	< 1 U	< 1.0 U	< 1 U	< 1 U	< 1 U	<1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	20.0	14.8	<1.0	< 1.0	<2.0	<2.0	< 1 U	< 1.0 U	< 5 U	< 2 U	< 1 U	0.34 J	< 1.0 U	< 1.0 U	94.0	81.4	51.5	14	14	11	2.6	0.34 J	< 1 U	< 1 U	< 1 U	<1.0 U	0.38 J	< 1.0 U
Toluene	µg/L	<1.0	<1.0	<1.0	< 1.0	1.8J	1.2J	< 1 U	0.39 J	< 5 U	< 2 U	< 1 U	0.13 J	0.18 J	< 1.0 U	<1.0	<1.0	<1.0	< 2.0	<2.0	0.83J	< 1 U	< 1.0 U	< 1 U	< 1 U	< 1 U	<1.0 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	10.1	12.0	5.4	3.6	9	4.4	1.1	0.99 J	1 J	0.9 J	0.27 J	0.22 J	0.29 J	0.20 J	2.4	2.0	2.2	1.8	8.6	2.5	1.9	2.1	1.6	2.6	1.3	0.68 J	0.89 J	0.84 J
Trichloroethene	µg/L	95.2	30.4	6.6	4.4	<2.0	<2.0	< 1 U	< 1.0 U	< 5 U	< 2 U	< 1 U	<1.0 U	< 1.0 U	< 1.0 U	119	78.2	56.6	48	33	23	5.7	1.4	0.35 J	0.34 J	< 1 U	3.8	6.6	< 1.0 U
Vinyl chloride	µg/L	10.1	8.4	2.4	1.9	5.8	<2.0	0.48 J	0.73 J	3.2 J	< 2 U	0.48 J	<1.0 U	0.44 J	0.24 J	2.3	1.6	3.7	1.9J	12	3.3	3	11	7.3	6.7	2.1	1.2	1.6	1.5
Xylenes	µg/L	10.3	2.3	1.9	0.39J	1.5J	2.0	1.1	< 2.0 U	< 10 U	0.9 J	3.9	1.3 J	< 2.0 U	0.99 J	<1.0	<10	<1.0	< 2.0	< 2.0	1.0	< 1 U	< 2.0 U	< 2 U	< 2 U	< 2 U	<2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	290	150.3	67.9	53.87	99.6	72	40.88	50.85	26.4	15	21.75	14.29	8.94	12.2	371.6	275.1	180.1	91.8	174.2	76.04	42.9	56.33	43.25	52.06	11.3	17.28	21.67	11.5

µg/L - Micrograms per Liter.
J - Value is estimated.
UJ - Constituent not detected above laboratory reporting limit; reporting limit estimated.
< - Constituent not detected above laboratory reporting limit shown.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September and October 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-3. Summary of Annual Groundwater Analytical Results from Reactive Zone 3 East Wells, RACER Trust, Moraine, Ohio.

RZ-3 East		Upgradient Well GM-22																
Constituents	Units	9/1/99	2/23/00	5/25/00	9/21/00	3/20/01	6/26/01	11/13/01	12/12/01	6/13/02	9/25/02	5/22/03	9/24/03	9/14/04	10/17/05	9/20/06	9/26/07	10/3/08
<u>Volatile Organic Compounds</u>																		
1,1,1-Trichloroethane	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	4.4	0.63J	0.47	0.93J	0.61J	1.2	1.7	0.96 J	0.47 J	0.66 J	0.73 J
1,1-Dichloroethane	µg/L	<1.0	2.2	2.8	2.4	3.8	4.7	6.8	6.6	4.1	<2	1.2	1.0	2.1	1.0	1.1	0.72 J	< 1 U
1,1-Dichloroethene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	0.58J	0.32J	<1.0	<2	< 1	<1.0	< 1 U	< 1.0 U	< 1 U	< 1 U	< 1 U
Benzene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<2	< 1	<1.0	< 1 U	< 1.0 U	< 1 U	< 1 U	< 1 U
cis-1,2-Dichloroethene	µg/L	<1.0	3.1	4.0	1.9	3.5	5.1	8.5	7.8	3.6	<1	0.46J	0.45J	0.9	0.36 J	0.28 J	0.24 J	< 1 U
Ethylbenzene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<2	< 1	<1.0	< 1 U	< 1.0 U	< 1 U	< 1 U	< 1 U
Tetrachloroethene	µg/L	3.6	2.8	3.0	1.6	2.2	3.2	4.9	2.9	1.9	2.3	2.5	2.9	2.9	3.6	3.2	3.3	5.7
Toluene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	1.1	<1.0	0.32J	<1.0	<2	0.49J	<1.0	< 1 U	< 1.0 U	< 1 U	< 1 U	< 1 U
trans-1,2-Dichloroethene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	0.17J	<0.50	<0.50	<1	< 0.5	<0.50	< 0.5 U	< 1.0 U	< 1 U	< 1 U	< 1 U
Trichloroethene	µg/L	4.0	2.5	3.6	<1.0	1.6	2.8	7.5	2.3	2.1	7.6	6	7.6	10	4.7	3	3.3	5.7
Vinyl chloride	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	0.60J	0.85J	0.38	<2	< 1	<1.0	< 1 U	< 1.0 U	< 1 U	< 1 U	< 1 U
Xylenes	µg/L	<1.0	1.2	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<2	< 1	<1.0	< 1 U	< 2.0 U	< 2 U	< 2 U	< 2 U
Total VOCs	µg/L	7.6	11.8	13.4	5.9	11.1	16.9	33.45	21.72	12.55	10.83	11.26	13.15	17.6	10.62	8.05	8.22	12.13

µg/L - Micrograms per Liter.
J - Value is estimated.
UJ - Constituent not detected above laboratory reporting limit; reporting limit estimated.
< - Constituent not detected above laboratory reporting limit shown.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September and October 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-3. Summary of Annual Groundwater Analytical Results from Reactive Zone 3 East Wells, RACER Trust, Moraine, Ohio.

RZ-3 East		Downgradient Well GM-21																				
Constituents	Units	9/22/99	2/23/00	5/26/00	9/22/00	3/19/01	6/25/01	11/13/01	12/11/01	6/12/02	9/25/02	5/22/03	9/24/03	9/14/04	10/17/05	9/20/06	12/1/06	9/26/07	10/3/08	11/16/09	9/28/10	9/29/11
<u>Volatile Organic Compounds</u>																						
1,1,1-Trichloroethane	µg/L	53.1	15.4	27.9	15.7	7.0	7.7	6.9	1.2	23	31	18	31	26	4.3	12	4.7	8.5	8.7	2.4	0.75 J	1.0
1,1-Dichloroethane	µg/L	9.0	5.8	6.8	5.6	5.1	4.1	3.8J	0.71J	5.4	5J	4.1J	6.9J	4.2 J	3.4	8.6	6.4	18	15	22	20	16
1,1-Dichloroethene	µg/L	3.9	1.6	2.4	1.6	1.2	<1.0	<5.0	<1.0	3.6	2.6J	< 6.7	2.0J	3.1 J	< 1.0 U	0.19 J	0.2 J	< 1.4 U	0.33 J	< 1.0 U	< 1.0 U	< 1.0 U
Benzene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<5.0	<1.0	<6.0	<6.7	< 6.7	<8.0	< 9.1 U	< 1.0 U	< 1 U	< 1 U	< 1.4 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	66.4	35.9	47.8	38.7	39.5	37.8	39	6.5	48	43	130	100	56	20	14	8.2	26	38	7.8	3.9	9.9
Ethylbenzene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<5.0	<1.0	<6.0	<6.7	< 6.7	<8.0	< 9.1 U	< 1.0 U	< 1 U	< 1 U	< 1.4 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<5.0	<1.0	<6.0	<6.7	< 6.7	<8.0	< 9.1 U	< 1.0 U	< 1 U	< 1 U	< 1.4 U	0.56 J	< 1.0 U	< 1.0 U	< 1.0 U
Toluene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<5.0	<1.0	<6.0	<6.7	< 6.7	<8.0	< 9.1 U	< 1.0 U	< 1 U	< 1 U	< 1.4 U	< 1.4 U	< 1.0 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	7.8	9.3	7.4	12.9	16.4	15.7	15	2.8	8.3	5.1	2.2J	2.9J	7.9	22	4.3	4.8	2.5	4.7	4.4	3	1.9
Trichloroethene	µg/L	28.7	283	311	189	169	158	160	28	210	230	79	200	180	1.8	5.9	0.8 J	2.8	18	2.4	3.2	19
Vinyl chloride	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<5.0	<1.0	<6.0	<6.7	< 6.7	<8.0	< 9.1 U	13	9.3	4.7	12	19	6.6	3.6	6.2
Xylenes	µg/L	<1.0	2.3	<1.0	<1.0	<1.0	<1.0	<5.0	<1.0	<6.0	<6.7	< 6.7	<8.0	< 9.1 U	< 2.0 U	< 2 U	< 2 U	< 2.9 U	< 2.9 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	168.9	353.3	403.3	263.5	238.2	223.3	224.7	39.21	298.3	316.7	233.3	342.8	277.2	64.5	54.29	29.8	69.8	104.29	45.6	34.45	54

µg/L - Micrograms per Liter.
J - Value is estimated.
UJ - Constituent not detected above laboratory reporting limit; reporting limit estimated.
< - Constituent not detected above laboratory reporting limit shown.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September and October 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-4. Summary of Annual Groundwater Analytical Results from Reactive Zone 4 East Wells, RACER Trust, Moraine, Ohio.

RZ-4 East		Upgradient Well WEST			Downgradient Well GM-19S																		
Constituents	Units	9/21/99	2/23/00	5/25/00	9/20/99	5/24/00	9/22/00	3/19/01	6/25/01	11/12/01	6/12/02	9/26/02	5/21/03	9/25/03	9/13/04	10/18/05	9/21/06	9/17/07	9/23/08	11/17/09	4/7/10	9/27/10	9/29/11
Volatile Organic Compounds																							
1,1,1-Trichloroethane	µg/L	24.8	25.1	27.4	16.0	17.9	14.5	11.9	9.6	7.6	7.2	6.3	12	13	14	13	9.7 J	0.59 J	< 1 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
1,1-Dichloroethane	µg/L	25.6	24.5	32.5	7.7	7.0	4.4	4.1	2.9	2.9J	3.7	6.3	8.4	8.3	8.1	9.0	7 J	10	13	12	9.6	9.5	10
1,1-Dichloroethene	µg/L	<1.0	<1.0	<1.0	1.0	1.1	<1.0	<1.0	<1.0	<3.3	0.98	<4	<4	1.6J	1.9 J	1.2 J	< 22 U	< 1 U	< 1 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Benzene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<3.3	0.62	<4	<4	<5.0	<4 U	< 1.7 U	< 22 U	< 1 U	< 1 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
cis-1,2-Dichloroethene	µg/L	125	34.5	29.0	34.6	42.9	37.6	38.2	31.5	26	28	39	81	89	61	29	660	0.3 J	0.68 J	0.27 J	0.27 J	< 1.0 U	5.3
Ethylbenzene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<3.3	<3.3	<4	<4	<5.0	<4 U	< 1.7 U	< 22 U	< 1 U	< 1 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Tetrachloroethene	µg/L	41.3	53.9	37.7	46.0	57.1	68.0	67.6	71.7	64	60	52	62	62	71	95	9.1 J	1.5	0.94 J	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
Toluene	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<3.3	<3.3	<4	<4	<5.0	<4 U	< 1.7 U	< 22 U	< 1 U	< 1 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U
trans-1,2-Dichloroethene	µg/L	<1.0	1.7	1.3	2.3	2.7	2.6	3.0	2.4	2.0	2.3	2.7	2.5	2.9	2.4	1.0 J	10 J	0.29 J	0.52 J	0.37 J	0.45 J	0.46 J	1.1
Trichloroethene	µg/L	37.3	108	103.0	71.1	104	104	107	121	97	110	110	120	140	120	140	11 J	0.46 J	3.0	0.22 J	< 1.0 U	< 1.0 U	< 1.0 U
Vinyl chloride	µg/L	<1.0	<1.0	<1.0	<1.0	1.4	<1.0	<1.0	<1.0	<3.3	0.70	5.2	<4	<5.0	<4 U	1.8	< 22 U	< 1 U	9.3	< 1.0 U	< 1.0 U	< 1.0 U	12
Xylenes	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<3.3	<3.3	<4	<4	<5.0	<4 U	< 3.3 U	< 44 U	< 2 U	< 2 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U
Total VOCs	µg/L	254	247.7	230.9	178.7	234.1	231.1	231.8	239.1	199.5	213.5	221.5	285.9	316.8	278.4	290	706.8	13.14	27.44	12.86	10.32	9.96	28.4

µg/L - Micrograms per Liter.
J - Value is estimated.
UJ - Constituent not detected above laboratory reporting limit; reporting limit estimated.
< - Constituent not detected above laboratory reporting limit shown.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September and October 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-5. Bioattenuation Parameter Results for Groundwater Samples Collected in Reactive Zone 1, RACER Trust, Moraine, Ohio.

RZ-1		Sidegradient Well GM-29																			
Constituents	Units	9/1/99	2/22/00	5/26/00	9/21/00	3/20/01	6/26/01	11/13/01	12/12/01	6/13/02	9/25/02	5/22/03	9/24/03	9/15/04	10/17/05	9/28/06	9/26/07	10/6/08	11/17/09	9/29/10	9/30/11
<u>Inorganics & TOC</u>																					
Nitrate	mg/L	0	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrite	mg/L	0	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen, Ammonia	mg/L	<0.30	<0.30	<0.30	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Manganese (Total)	mg/L	0.552	0.136	0.35	0.248	0.203	0.136	0.17B	0.17	1.5B	0.18B	0.67J	0.20J	0.17	0.18	1.3	0.3 J	< 0.19 U	0.296	0.451	0.18
Manganese (Dissolved)	mg/L	0.13	0.101	0.177	0.125	0.116	0.128	0.17B	0.15	0.13B	0.16B	0.15J	0.21J	0.15	0.14	0.12	0.16 J	< 0.16 U	0.118	0.113	0.11
Iron (Total)	mg/L	18	1.43	10.1	8.48	5.84	2.52	3.4	3.8	47.8B	3.8	28.6	4.9	3.2	4.6	< 0.1 U	8.9	< 5.4 U	13.8	19.6	6.3
Iron (Dissolved)	mg/L	0.24	0.13	2.78	3.09	<0.10	2.03	3.3	2.9	2.2B	2.8	2.4	3.6	2.7	3.7	2.9	3.4	< 3.9 U	3.3	2.97	2.4
Iron (Ferrous)	mg/L	0.02	0	2.2	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Sulfate	mg/L	90	126	31	29	31	37	65	48	63	76	91J	52	14 J	51	70	65	< 5 UJ	68	72	64
Sulfide	mg/L	<4	<1	<1	<1	<1	<1	1.3	<1	<1	<1	0.54B	1.6	< 1 U	< 1 U	< 1 U	< 1 U	< 1 U	0.56 J	< 1.0 U	< 1.0 U
Total Organic Carbon	mg/L	18	11	22	<1	7.57	7.3	10	10	8	8	7	9	9	11	13	15 J	16	9	8	8.5
Chloride	mg/L	254	426	508	373	337	262	600B	460	490	490	490	560J	540	370	380	360 J	< 1 U	210	160	130
<u>Permanent Gases</u>																					
Carbon Dioxide	mg/L	46.52	49.87	44.05	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Oxygen	mg/L	1.02	0.66	1.41	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen	mg/L	20.29	18.7	15.61	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methane	mg/L	0.01152	0.007699	0.00017	1.62	1.30	1.5	0.610	1.2	0.56	1.1	0.6	1.5	3.8	13	10	NA	16	8.1	5.7	3.1
Carbon Monoxide	mg/L	<0.40	<0.40	<0.40	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<u>Light Hydrocarbon Scan</u>																					
Ethane	ng/L	5,641	1,861	751	639	460	17,000	20,000	28,000	14,000	16,000	7,400	9,900	13,000	170,000	350,000	NA	370,000	360,000	340,000	180000
Ethene	ng/L	9,769	1,275	12,098	441,796	160,000	130,000	230,000	180,000	48,000	140,000	150,000	200,000	1,700,000	1,600,000 J	750,000	NA	420,000	140,000	59,000	20000
<u>Field Parameters</u>																					
pH	S.U.	6.99	7.02	6.86	7.24	7.31	7.20	7.47	7.57	7.14	7.22	6.32	6.88	6.85	6.80	6.94	6.63	7.1	6.91	7.09	6.59
Specific Conductivity	umhos/cm	1,502	3,044	2,388	1,942	1,733	1,291	2,703	2,860	1,977	2,354	2,303	2,278	2,580	2,200	2,170	2,350	1,870	1,264	1,427	1,651
Dissolved Oxygen	mg/L	0.35	0.51	0.45	3.44	8.20	0.40	0.22	0.01	3.57	1.40	1.38	0.13	0.04	0.00	0.29	0.4	0.11	0.16	2.00	0.15
Redox Potential	mV	-526.6	19.6	-105.4	-35.0	-158.2	-166.4	-129.7	-168	-122.9	-91.3	-157.8	-118.6	-134	-153	-168	-139	-54	-140.1	-163	-14.2
Temperature	°C	17.8	16.9	17.97	17.64	20.04	20.47	16.42	17.13	19.33	17.63	18.23	16.81	16.4	16.8	16.69	18	16.78	16.50	18.00	21.1

mg/L - Milligrams per Liter.
ng/L - Nanograms per Liter.
S.U. - Standard Units.
umhos/cm - Micromohs per Centimeter.
mV - Millivolts.
°C - Degrees Celsius.
J - Value is estimated.
B - Blank Contamination.
NA - Not Analyzed.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-5. Bioattenuation Parameter Results for Groundwater Samples Collected in Reactive Zone 1, RACER Trust, Moraine, Ohio.

RZ-1		Upgradient Well GM-23															
Constituents	Units	9/2/99	2/21/00	5/31/00	3/20/01	6/13/02	9/26/02	5/22/03	9/23/03	9/14/04	10/17/05	9/28/06	9/27/07	10/23/08	11/17/09	9/29/10	9/30/11
<u>Inorganics & TOC</u>																	
Nitrate	mg/L	0.08	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrite	mg/L	3.83	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen, Ammonia	mg/L	<0.30	0.94	2.84	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Manganese (Total)	mg/L	4.71	0.887	0.121	0.469	1.5 J	1.0 J	1.5 J	1.6 J	1.3 J	0.79	1.5	1.4 J	0.89	0.539	0.508	0.57
Manganese (Dissolved)	mg/L	0.346	0.841	0.101	0.311	1.3 J	0.68 J	1.5 J	1.7 J	1.2 J	0.81	1.5	1.3 J	0.90	0.516	0.492	0.5
Iron (Total)	mg/L	13.6	0.53	0.18	0.48	0.16 J	0.63	0.50	0.14	0.11	30.7	13.6	10.8	10.1	5.51	5.72	7.5
Iron (Dissolved)	mg/L	<0.10	<0.10	<0.10	< 1.0	<0.10	<0.10	<0.10	<0.10	<0.10	34.2	13.2	10	10	5.21	5.33	6
Iron (Ferrous)	mg/L	4	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Sulfate	mg/L	72	650	8040	1440	920	810	310 J	650	430 J	120	850	590	490	130	160	200
Sulfide	mg/L	<4	<1	<1	<1	<1	<1	<1 U	0.67 B	<1	<1	<1 U	< 1 U	< 1 U	0.73 J	< 1.0	< 1.0 U
Total Organic Carbon	mg/L	19	25	19	10.8	15 J	15	15	13	10 J	360	11	9	9	7	9	6.6
Chloride	mg/L	118	143	85	232	180	190	220	140 J	220	260	220	210	220	100	43	65
<u>Permanent Gases</u>																	
Carbon Dioxide	mg/L	88.47	264.8	323.79	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Oxygen	mg/L	0.96	1.56	17.78	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen	mg/L	20.22	13.75	3.13	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methane	mg/L	0.1248	0.72	0.02083	0.780	1.6	2.1	2.7	1.8	1.5	1.3	0.91	0.64	1.9	1.7	2.5	2
Carbon Monoxide	mg/L	<0.40	<0.40	<0.40	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<u>Light Hydrocarbon Scan</u>																	
Ethane	ng/L	6,878	14,644	1,037	11,000	25,000	32,000	44,000	23,000	17,000	16,000	12,000	7,100	21,000	31,000	36,000	25,000
Ethene	ng/L	580,916	439,458	569	260,000	230,000	230,000	1,200,000	270,000	260,000	500,000	900,000	370,000 J	960,000	2,100,000	1,700,000	230,000
<u>Field Parameters</u>																	
pH	S.U.	6.80	6.62	6.31	6.64	6.81	6.76	5.59	6.73	7.04	5.66	6.69	6.34	7.74	6.80	6.89	6.52
Specific Conductivity	umhos/cm	1,160	2,856	6,720	3,448	2,290	2,390	1,683	2,258	2,130	2,570	2,740	2,470	1,465	1,184	1,395	1,812
Dissolved Oxygen	mg/L	0.65	0.78	10.48	8.38	4.23	0.42	1.76	0.85	0.00	0.00	0.40	0.44	0.11	0.16	0.23	0.54
Redox Potential	mV	122.2	158.7	194.2	160.4	346.5	215.6	247.9	198.8	57	-108	-108	-91	189	-90.1	-104.2	-52
Temperature	°C	17.89	17.6	26.45	19.08	16.40	19.06	17.91	17.38	16.30	16.50	16.78	17.50	17.12	17.15	18.89	17.40

mg/L - Milligrams per Liter.
ng/L - Nanograms per Liter.
S.U. - Standard Units.
umhos/cm - Micromohs per Centimeter.
mV - Millivolts.
°C - Degrees Celsius.
J - Value is estimated.
B - Blank Contamination.
NA - Not Analyzed.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-5. Bioattenuation Parameter Results for Groundwater Samples Collected in Reactive Zone 1, RACER Trust, Moraine, Ohio.

RZ-1		Downgradient Well GM-28																				
Constituents	Units	9/1/99	2/23/00	5/26/00	9/21/00	3/20/01	6/26/01	11/15/01	12/12/01	7/21/02	9/24/02	5/23/03	10/1/03	4/30/04	9/15/04	10/18/05	9/27/06	9/20/07	10/22/08	11/16/09	9/28/10	10/5/11
<u>Inorganics & TOC</u>																						
Nitrate	mg/L	0.08	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrite	mg/L	0.06	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen, Ammonia	mg/L	<0.30	<0.30	0.68	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Manganese (Total)	mg/L	3.2	1.15	6.26	4.1	0.594	2.24	0.58	0.47	1.1	0.48B	0.69J	0.42J	0.34	0.37	0.45	0.46	0.44 J	1.4	0.468	0.468	0.72
Manganese (Dissolved)	mg/L	0.068	0.449	6.71	3.94	0.477	1.76	0.61	0.49	1.1	0.41B	0.29J	0.40J	0.32	0.36	0.45	0.43	0.43 J	1.5	0.444	0.466	0.49
Iron (Total)	mg/L	106	25.3	22.7	58.9	29.6	59	23.6	23.5	36.2	28.7	47.9	23.4J	17.6	15.7	16.1	14.5	11.7	23.4	11.3	11.6	22
Iron (Dissolved)	mg/L	<0.10	0.59	23.3	48.3	2.65	49.8	23.3	23.7	34.7	23.4	16.7	22.4J	16.4	15.1	15.2	13.1	10.7	23.7	10.2	10.6	5.5
Iron (Ferrous)	mg/L	0	0.03	2.6	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Sulfate	mg/L	89	43	<5	<5	9	106	<5	<5	<5	18	65J	31J	89	93 J	91	75	77	33	55	45	41
Sulfide	mg/L	<4	<1	<1	<1	<1	<1	1.5	<1.0	2.0	4.3	2.5	<1.0	< 1 U	< 1 U	< 1.0 U	< 1 U	< 1 U	< 1 U	< 1 U	< 1.0	< 1.0 U
Total Organic Carbon	mg/L	15	24	742	571	90.0	360	74	68B	140	23	15	17	15 J	8	10	7	8 J	310	6	7	9.1
Chloride	mg/L	208	664	805	782	1030	508	730B	560	370	450	350	270J	320	340	320	320	300 J	260	220	170	130
<u>Permanent Gases</u>																						
Carbon Dioxide	mg/L	41.52	63.57	16.51	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Oxygen	mg/L	2.32	0.59	0.64	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen	mg/L	19.42	16.39	19.82	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methane	mg/L	0.002487	0.001832	0.21	1.70	13.0	13.0	13	20	19	14	8.9	11	7.9	6.6	2.8	2.5	2.3	2.9	4.2	2.3	0.76
Carbon Monoxide	mg/L	<0.40	<0.40	<0.40	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<u>Light Hydrocarbon Scan</u>																						
Ethane	ng/L	750	493	865	1,198	42,000	39,000	91,000	98,000	420,000	300,000	310,000	230,000	160,000	150,000	81,000	73,000	72,000	52,000	73,000	53,000	14,000
Ethene	ng/L	48	98	646	1,794,606	57,000	5,000	1,100	1,400	8,800	12,000	74,000	430	160	54	< 210 U	< 25 U	62	9,300	< 200 U	150	86
<u>Field Parameters</u>																						
pH	S.U.	7.02	6.92	7.01	7.18	7.1	6.64	6.50	7.45	6.84	7.24	6.86	6.80	NA	6.85	5.47	7.08	6.72	6.49	7.04	7.16	NA
Specific Conductivity	umhos/cm	1,359	3,124	4,402	4,538	3,724	3,216	3,136	3,700	2,187	2,195	2,132	1,501	NA	2,030	2,230	1,880	2	1,428	1,821	1,615	NA
Dissolved Oxygen	mg/L	0.95	1.45	2.52	6.78	4.36	0.41	0.83	0.20	0.68	0.35	1.41	0.34	NA	0	0	0.29	0.64	0.13	0.20	2.70	NA
Redox Potential	mV	90.5	56.0	-93.7	-200.1	-70.6	-177.8	-148.2	-203	-153.3	-135.3	-93.1	-146.9	NA	-165	-166	-183	-152	27	-166.2	-153.5	NA
Temperature	°C	16.4	18.48	19.24	20.21	18.93	19.04	19.24	18.92	20.44	18.68	16.88	17.97	NA	16.2	15.9	16.33	17.1	16.38	16.65	16.56	NA

mg/L - Milligrams per Liter.
ng/L - Nanograms per Liter.
S.U. - Standard Units.
umhos/cm - Micromohs per Centimeter.
mV - Millivolts.
°C - Degrees Celsius.
J - Value is estimated.
B - Blank Contamination.
NA - Not Analyzed.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-6. Bioattenuation Parameter Results for Groundwater Samples Collected in Reactive Zone 3 West, RACER Trust, Moraine, Ohio.

RZ-3 West		Upgradient Well EAST													
Constituents	Units	9/21/99	2/23/00	5/25/00	9/22/00	3/19/01	11/12/01	12/11/01	6/12/02	9/23/02	5/21/03	9/25/03	9/13/04	10/18/05	9/21/06
<u>Inorganics & TOC</u>															
Nitrate	mg/L	0	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrite	mg/L	0	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen, Ammonia	mg/L	<0.30	<0.30	<0.30	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Manganese (Total)	mg/L	0.627	0.474	0.361	0.227	0.182	0.20B	0.21B	0.56B	0.28B	0.12J	0.23J	0.19	1.4	0.92
Manganese (Dissolved)	mg/L	0.098	0.157	0.116	0.136	0.129	0.18B	0.17B	0.20B	0.16B	0.041J	0.096	0.047	0.1	0.12
Iron (Total)	mg/L	4.82	5.55	5.3	2.26	1.17	0.21	0.29	7.9	0.89	0.16	0.64	0.4	5.1	14
Iron (Dissolved)	mg/L	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<1.0	<0.10	< 0.1 U	< 0.10 U	< 0.1 U
Iron (Ferrous)	mg/L	0	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Sulfate	mg/L	75	130	117	96	101	130	120	170	95	63J	110	54 J	130	71
Sulfide	mg/L	<1	<1	<1	<1	<1.0	1.2	1.6	<1.0	<1.0	<1	2.1	< 1 U	< 1.0 U	< 1 U
Total Organic Carbon	mg/L	3	10	4	<1	<1.0	3B	2	4	2	<1	1	0.5 B	4	2
Chloride	mg/L	283	254	194	196	198	190B	180	270	310	250	310J	290	370	430
<u>Permanent Gases</u>															
Carbon Dioxide	mg/L	34.69	58.08	52.02	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Oxygen	mg/L	1.88	0.97	1.26	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen	mg/L	17.88	17.50	19.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methane	mg/L	0.000571	0.003269	0.01158	1.08	1.1	0.31	0.15	0.0042	0.0027	0.00055	0.0013	0.0012	< 0.0058 U	0.0018
Carbon Monoxide	mg/L	<0.40	<0.40	<0.40	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<u>Light Hydrocarbon Scan</u>															
Ethane	ng/L	32	39	118	126	2,600	2,000	1,800	440	50	13	14	20	< 76 U	28
Ethene	ng/L	18	107	57	73	190	150	56	170	37	34	21	20	< 210 U	43
<u>Field Parameters</u>															
pH	S.U.	6.99	7.04	7.00	7.11	7.34	7.15	7.32	7.02	7.18	6.69	6.94	7.18	6.17	6.88
Specific Conductivity	umhos/cm	1,777	1,955	1,503	1,133	1,189	1,363	1,480	1,439	1,467	1,506	1,548	1,700	2,190	2,120
Dissolved Oxygen	mg/L	0.30	0.37	2.76	1.68	1	1.73	0.05	1.05	1.82	1.79	1.04	0.94	0	0.52
Redox Potential	mV	14.9	122.9	144.5	143.7	468.4	177.1	86	306.5	215.6	201	147.6	195	189	104
Temperature	°C	21.21	19.38	19.32	20.30	19.6	18.68	18.69	19.61	19.62	19.45	18.47	17.4	17.5	18.03

mg/L - Milligrams per Liter.
ng/L - Nanograms per Liter.
S.U. - Standard Units.
umhos/cm - Micromohs per Centimeter.
mV - Millivolts.
°C - Degrees Celsius.
J - Value is estimated.
B - Blank Contamination.
NA - Not Analyzed.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-6. Bioattenuation Parameter Results for Groundwater Samples Collected in Reactive Zone 3 West, RACER Trust, Moraine, Ohio.

RZ-3 West		Downgradient Well GM-32																		
Constituents	Units	9/22/99	2/28/00	5/30/00	9/25/00	3/19/01	11/12/01	12/11/01	6/12/02	9/20/02	5/23/03	10/1/03	9/14/04	10/19/05	9/19/06	9/18/07	9/23/08	11/16/09	9/27/10	9/29/11
<u>Inorganics & TOC</u>																				
Nitrate	mg/L	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrite	mg/L	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen, Ammonia	mg/L	2.29	2.00	19.3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Manganese (Total)	mg/L	0.147	0.516	0.051	0.30	0.17	0.16B	0.087B	0.043B	0.053B	0.1J	0.13J	0.13 J	0.076	0.088	0.077 J	0.051	NA	NA	NA
Manganese (Dissolved)	mg/L	0.052	0.061	0.048	0.31	<0.050	0.020B	0.024B	0.042B	0.028B	0.077J	0.11J	0.13 J	0.067	0.078	0.072 J	0.056	NA	NA	NA
Iron (Total)	mg/L	8.14	42.4	18.4	81.0	13	16.5	10.5	7.5	8.4B	21.3	31.4J	33.9	22.0	24.7	20	14	NA	NA	NA
Iron (Dissolved)	mg/L	3.53	0.59	17.1	81.6	3.17	5.2	6.5	8.1	6.8B	18.7	30.5J	34.5	19.8	24.5	19.5	13.6	NA	NA	NA
Iron (Ferrous)	mg/L	1.8	2.2	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Sulfate	mg/L	30	<5	<10	<10	<20	5	4J	1J	<5	<5	<5	< 5 U	< 5 U	< 5 U	< 5 U	24	NA	NA	NA
Sulfide	mg/L	<1	<10	<1	<1	1.6	<1	<1.0	0.50J	1.3	0.86B	7.3	16	4.1	1	14	7.7	NA	NA	NA
Total Organic Carbon	mg/L	68	1200	2020	2720	1120	320B	250	240	160	150	170	240 J	300	260	290 J	95	170	260	71
Chloride	mg/L	317	638	740	740	798	700B	630	470	510	390	510J	530	550	560	560 J	400	NA	NA	NA
<u>Permanent Gases</u>																				
Carbon Dioxide	mg/L	39.79	8.94	24.32	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Oxygen	mg/L	1.67	0.85	<0.15	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen	mg/L	14.93	15.23	2.40	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methane	mg/L	2.73	7.06	14.91	16.84	29	29	38	24	32	24	19	25	30 J	26	26	25	NA	NA	NA
Carbon Monoxide	mg/L	<0.40	<0.40	<0.40	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<u>Light Hydrocarbon Scan</u>																				
Ethane	ng/L	1,649	9,965	1,029	189	7,900	42,000	72,000	84,000	94,000	74,000	46,000	57,000	85,000 J	76,000	73,000	58,000	NA	NA	NA
Ethene	ng/L	86,509	163,855	472,312	510,593	150,000	130,000	90,000	93,000	49,000	9,900	3,400	2,000	1,900 J	2,400	1,200	940	NA	NA	NA
<u>Field Parameters</u>																				
pH	S.U.	7.54	8.59	7.64	7.73	8.36	8.42	8.13	8.55	8.13	6.41	6.81	6.86	6.30	6.84	7.00	7.13	7.02	7.68	7.20
Specific Conductivity	umhos/cm	2,750	9,030	9,195	9,225	7,483	6,874	6,200	5,432	4,289	3,908	3,192	4,210	4,810	4,510	4,240	3,220	3,540	5,328	3,280
Dissolved Oxygen	mg/L	0.09	0.23	10.82	2.55	0.36	0.07	0.03	1.14	0.22	1.93	0.31	0	0	0.21	0.45	1.79	0.89	2.4	1.97
Redox Potential	mV	-226.4	-279.1	-213.6	-353.8	-152.5	-222.8	-279	-220.5	-227.1	-204.6	-154.4	-160	-191	-193	-161	-200	-108	-236.9	-244
Temperature	°C	19.27	19.72	23.48	19.27	19.3	18.84	18.62	20.83	19.81	19.31	18.47	17.20	17.00	17.70	16.70	18.71	16.30	16.79	18.77

mg/L - Milligrams per Liter.
ng/L - Nanograms per Liter.
S.U. - Standard Units.
umhos/cm - Micromohs per Centimeter.
mV - Millivolts.
°C - Degrees Celsius.
J - Value is estimated.
B - Blank Contamination.
NA - Not Analyzed.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-6. Bioattenuation Parameter Results for Groundwater Samples Collected in Reactive Zone 3 West, RACER Trust, Moraine, Ohio.

RZ-3 West		Downgradient Well GM-8											
Constituents	Units	3/6/98	9/20/99	9/20/02	12/9/03	9/14/04	10/19/05	9/19/06	9/18/07	9/23/08	11/16/09	9/27/10	9/30/11
<u>Inorganics & TOC</u>													
Nitrate	mg/L	<4.4	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrite	mg/L	<0.033	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen, Ammonia	mg/L	1.69	1.95	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Manganese (Total)	mg/L	0.204	0.125	0.085B	0.21	0.13	0.17	0.16	0.12 J	0.027	0.0617	0.14	0.035
Manganese (Dissolved)	mg/L	0.229	0.125	0.084B	0.21	0.14	0.15	0.15	0.11 J	0.026	0.0643	0.0604	0.031
Iron (Total)	mg/L	1.01	0.27	0.55B	1.9	1.8	3.2	3.4	3.3	0.69	2.2	4.27	1.2
Iron (Dissolved)	mg/L	1.22	0.26	0.52B	1.9	1.8	2.8	3.1	3	0.64	2.13	2.05	0.98
Iron (Ferrous)	mg/L	<0.2	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Sulfate	mg/L	59	54	59	<5	13 J	27	24	49	32	23	22	24
Sulfide	mg/L	<1	<1	<1.0	<1.0	2	< 1.0 U	1.8	0.86 J	0.54 J	1.2 J	1.4	< 1.0 U
Total Organic Carbon	mg/L	7	8	16	20	19 J	19	16	16 J	12	15	19	17
Chloride	mg/L	248	216	180	180J	190	260	320	360 J	250	230	230	270
<u>Permanent Gases</u>													
Carbon Dioxide	mg/L	15.8	9.91	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Oxygen	mg/L	1.1	0.92	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen	mg/L	19.7	25.42	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methane	mg/L	1.48	2.47	8.5	14	9	8.1 J	7.2	9.1	4.4	7.8	6.7	4.7
Carbon Monoxide	mg/L	<0.4	<0.40	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<u>Light Hydrocarbon Scan</u>													
Ethane	ng/L	370	1,134	13,000	12,000	18,000	17,000 J	7,200	10,000	22,000	11,000	19,000	26,000
Ethene	ng/L	12,233	39,617	3,700	440	56	< 76 U J	1,200	32	140	< 220 U	33	120
<u>Field Parameters</u>													
pH	S.U.	7.7	7.98	8.18	7.2	7.76	6.45	7.31	7.21	8.1	7.86	7.89	7.81
Specific Conductivity	umhos/cm	1,539	1,584	1,734	1,870	1,900	2,080	2,120	2,300	2,060	1,920	2,083	2,560
Dissolved Oxygen	mg/L	0.16	0.28	0.37	0.04	0	0	0.53	0.70	0	0	3.00	0.60
Redox Potential	mV	-145	-49.8	-150.6	-137	-186	-162	-160	-125	-262	-24	-167.7	-115
Temperature	°C	17.53	19.09	19.2	18.17	16.60	16.30	18.10	17.00	17.60	16.00	16.51	21.1

mg/L - Milligrams per Liter.
ng/L - Nanograms per Liter.
S.U. - Standard Units.
umhos/cm - Micromohs per Centimeter.
mV - Millivolts.
°C - Degrees Celsius.
J - Value is estimated.
B - Blank Contamination.
NA - Not Analyzed.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-6. Bioattenuation Parameter Results for Groundwater Samples Collected in Reactive Zone 3 West, RACER Trust, Moraine, Ohio.

RZ-3 West		Downgradient Well GM-6									
Constituents	Units	3/6/98	9/20/99	9/20/02	12/9/03	9/14/04	10/19/05	9/19/06	9/18/07	9/24/08	9/27/10
<u>Inorganics & TOC</u>											
Nitrate	mg/L	<4.4	0	NA	NA	NA	NA	NA	NA	NA	NA
Nitrite	mg/L	<0.033	0	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen, Ammonia	mg/L	<0.300	<0.30	NA	NA	NA	NA	NA	NA	NA	NA
Manganese (Total)	mg/L	1.07	1.11	0.27B	0.57	0.43	0.50	0.54	0.4 J	0.14	NA
Manganese (Dissolved)	mg/L	1	0.958	0.24B	0.53	0.47	0.49	0.54	0.39 J	0.13	NA
Iron (Total)	mg/L	1.32	0.27	0.40B	5.7	3.2	5.4	5.7	6.7	2.9	NA
Iron (Dissolved)	mg/L	<0.1	<0.10	0.30B	1.9	3.1	4.8	5.6	6.3	2.6	NA
Iron (Ferrous)	mg/L	<0.2	NA	NA	NA	NA	NA	NA	NA	NA	NA
Sulfate	mg/L	93	83	43	27	26 J	52	55	66	26	NA
Sulfide	mg/L	<1	<1	<1.0	<1.0	3.4	< 1.0 U	< 1 U	< 1 U	6.5	NA
Total Organic Carbon	mg/L	3	4	17	12	16 J	6	7	8 J	14 J	NA
Chloride	mg/L	227	247	170	190J	230	290	340	400 J	250	NA
<u>Permanent Gases</u>											
Carbon Dioxide	mg/L	47.4	48.44	NA	NA	NA	NA	NA	NA	NA	NA
Oxygen	mg/L	1.57	2.23	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen	mg/L	20.5	21.77	NA	NA	NA	NA	NA	NA	NA	NA
Methane	mg/L	0.008337	0.006916	7.8	7.8	7.2	4.4 J	3.5	5.3	5.2	NA
Carbon Monoxide	mg/L	<0.4	<0.40	NA	NA	NA	NA	NA	NA	NA	NA
<u>Light Hydrocarbon Scan</u>											
Ethane	ng/L	47	67	10,000	2,400	5,000	870 J	520	660	13,000	NA
Ethene	ng/L	91	97	4,900	750	2,000	3,600 J	1,700	1,800	680	NA
<u>Field Parameters</u>											
pH	S.U.	7	7.05	7.46	7.76	7.16	6.06	6.8	6.84	7.17	7.27
Specific Conductivity	umhos/cm	1,422	1,493	1,658	2,080	1,830	1,880	1,920	2,130	2,160	1,900
Dissolved Oxygen	mg/L	0.88	0.48	0.34	0.03	0	0	0.24	0.51	1.43	3.30
Redox Potential	mV	57.6	26.5	-27.7	-223	-111	-107	-111	-86	-159	-136.4
Temperature	°C	18.49	21.07	19.07	17.71	16.8	16.8	17.3	17.5	16.51	16.10

mg/L - Milligrams per Liter.
ng/L - Nanograms per Liter.
S.U. - Standard Units.
umhos/cm - Micromohs per Centimeter.
mV - Millivolts.
°C - Degrees Celsius.
J - Value is estimated.
B - Blank Contamination.
NA - Not Analyzed.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-7. Bioattenuation Parameter Results for Groundwater Samples Collected in Reactive Zone 3 East, RACER Trust, Moraine, Ohio.

RZ-3 East		Upgradient Well GM-22															
Constituents	Units	9/1/99	2/23/00	5/25/00	9/21/00	3/20/01	11/13/01	12/12/01	6/13/02	9/25/02	5/22/03	9/24/03	9/14/04	10/17/05	9/20/06	9/26/07	10/3/08
<u>Inorganics & TOC</u>																	
Nitrate	mg/L	0	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrite	mg/L	0	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen, Ammonia	mg/L	<0.30	<0.30	<0.30	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Manganese (Total)	mg/L	0.089	0.273	0.355	0.422	0.458	0.74B	0.63	0.38B	0.029B	0.031J	0.027J	0.1 J	0.04	0.26	0.071 J	0.033
Manganese (Dissolved)	mg/L	0.096	0.263	0.328	0.403	0.413	0.73B	0.62	0.40B	0.093B	0.023J	0.020J	0.035 J	0.026	0.18	0.015 J	< 0.015 U
Iron (Total)	mg/L	<0.10	0.16	0.96	0.94	0.28	<0.10	<0.10	0.11B	0.18	0.22	0.23	1.6	0.19	2.1	1	0.68
Iron (Dissolved)	mg/L	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.1	<0.10	< 0.1 U	< 0.10 U	< 0.1 U	< 0.1 U	< 0.1 U
Iron (Ferrous)	mg/L	0.6	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Sulfate	mg/L	49	125	120	117	99	300	150	120	70	72J	77	49 J	52	48	66	42
Sulfide	mg/L	<1	<1	<1	<1	<1.0	<1	<1.0	<1.0	0.40J	0.54B	1.6	< 1 U	< 1.0 U	< 1 U	< 1U	1.5
Total Organic Carbon	mg/L	6	4	4	<1	<1.0	16B	6B	3	2	<1	1	1 J	2	2	< 2 U	1
Chloride	mg/L	246	270	279	248	326	220B	280	290	370	350	350J	370	330	420	390 J	240
<u>Permanent Gases</u>																	
Carbon Dioxide	mg/L	40.15	43.99	40.20	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Oxygen	mg/L	1.05	0.86	1.28	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen	mg/L	23.38	19.43	21.3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methane	mg/L	0.05818	0.23	0.18	0.000967	0.28	0.067	0.16	0.039	0.014	0.00039	1.2	0.02	< 0.012 U	< 0.0047 U	0.0016	0.0043
Carbon Monoxide	mg/L	<0.40	<0.40	<0.40	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<u>Light Hydrocarbon Scan</u>																	
Ethane	ng/L	42	91	69	29	83	130	120	140	270	13	8.4	340	< 810 U	< 83 U	22 J	13 J
Ethene	ng/L	67	32	64	111	39	210	12	54	62	27	11	12	< 810 U	< 59 U	11 J	< 25 U
<u>Field Parameters</u>																	
pH	S.U.	7.12	7.15	7.08	7.17	7.00	7.33	7.39	7.21	7.02	6.89	7.04	7.10	6.88	6.97	6.78	6.76
Specific Conductivity	umhos/cm	1,373	1,975	1,671	1,684	1,610	1,753	2,020	1,415	1,720	1,730	1,597	1,760	1,930	2,080	2,170	1,280
Dissolved Oxygen	mg/L	0.32	0.46	0.49	1.73	0.82	0.01	0.15	0.94	2.14	1.04	1.2	0	0	0.27	1.18	3.15
Redox Potential	mV	62.2	70.2	26.1	-80.8	175.1	54.8	-110	105.2	181.2	116.6	74.6	62	68	51	79	174
Temperature	°C	19.41	18.87	20.87	22.28	20.79	19.45	18.99	20.29	19.49	18.62	18.45	17.2	16.9	17.46	18.1	16.79

mg/L - Milligrams per Liter.
ng/L - Nanograms per Liter.
S.U. - Standard Units.
umhos/cm - Micromohs per Centimeter.
mV - Millivolts.
°C - Degrees Celsius.
J - Value is estimated.
B - Blank Contamination.
NA - Not Analyzed.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-7. Bioattenuation Parameter Results for Groundwater Samples Collected in Reactive Zone 3 East, RACER Trust, Moraine, Ohio.

RZ-3 East		Downgradient Well GM-21																		
Constituents	Units	9/22/99	2/23/00	5/26/00	9/22/00	3/19/01	11/13/01	12/11/01	6/12/02	9/25/02	5/22/03	9/24/03	9/14/04	10/17/05	9/20/06	9/26/07	10/3/08	11/16/09	9/28/10	9/29/11
<u>Inorganics & TOC</u>																				
Nitrate	mg/L	0	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrite	mg/L	0	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen, Ammonia	mg/L	<0.30	<0.3	<0.30	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Manganese (Total)	mg/L	0.321	0.233	0.215	0.336	0.298	0.30B	0.30B	0.31B	0.29B	0.32J	0.37J	0.35 J	0.17	0.19	0.27 J	0.78	0.882	0.758	0.93
Manganese (Dissolved)	mg/L	0.273	0.225	0.212	0.312	0.291	0.32B	0.29B	0.29B	0.25B	0.26J	0.38J	0.33 J	0.16	0.19	0.27 J	0.77	0.893	0.768	0.91
Iron (Total)	mg/L	2.58	0.30	0.83	0.63	0.11	<0.10	0.16	0.65	0.56	12.6	0.27	2.3	26.9	10.7	9.2	17.9	19.6	26.1	32
Iron (Dissolved)	mg/L	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	0.11	<0.10	<0.10	1.4	0.47	< 0.1 U	25.5	10.7	8.9	16.7	20.2	25.6	31
Iron (Ferrous)	mg/L	0.4	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Sulfate	mg/L	103	102	80	102	118	120	100	76	76	55J	82	79 J	< 5 U	35	17	38	19	13	23
Sulfide	mg/L	<1	<1	<1	<1	<1	<1	1.9	0.50J	0.40J	0.54B	1.5	2.9	< 1.0 U	< 1 U	< 1 U	1.5	4.0 J	< 1.0	< 1.0 U
Total Organic Carbon	mg/L	1	3	2	<1	<1	2B	1	0.9J	2	2	2	2 J	92	7	14 J	18	45	91	100
Chloride	mg/L	136	145	126	129	165	140	150	170	180	160	190J	190	190	240	260 J	240	220	230	300
<u>Permanent Gases</u>																				
Carbon Dioxide	mg/L	37.04	37.40	18.70	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Oxygen	mg/L	1.41	0.99	1.89	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen	mg/L	23.40	21.67	23.64	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methane	mg/L	0.03744	0.01769	0.01370	0.04218	0.048	0.049	0.035	0.022	0.03	0.031	1.5	0.077	17	4.9	30	28	28	23	15
Carbon Monoxide	mg/L	<0.40	<0.40	<0.40	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<u>Light Hydrocarbon Scan</u>																				
Ethane	ng/L	72	67	84	72	82	76	120	150	120	130	30	140	9,800	27,000	290,000 J	77,000	71,000	50,000	21,000
Ethene	ng/L	169	38	70	69	46	46	100	120	64	570	520	250	330,000	63,000	80,000	13,000	6,700	3,600	3,100
<u>Field Parameters</u>																				
pH	S.U.	6.99	7.22	7.06	7.21	7.85	7.50	7.45	7.22	7.09	6.76	7.05	7.19	6.73	6.90	6.64	6.05	6.40	6.46	6.50
Specific Conductivity	umhos/cm	1,188	1,299	1,048	1,096	1,067	1,190	1,360	1,045	1,245	968	1,181	1,180	1,640	1,580	1,870	1,405	2,088	2,424	2,974
Dissolved Oxygen	mg/L	0.66	0.60	0.40	0.99	0.57	0.04	0.04	0.63	0.41	0.83	0.75	0	0	0.25	0.46	0.12	0.24	3.60	0.30
Redox Potential	mV	-26.9	113.3	167.1	153.9	218.5	168.8	-25	373.8	238.1	77.1	-26.7	-7	-140	-137	-126	68	-92.1	-95.1	-13.7
Temperature	°C	20.43	18.43	17.92	19.03	17.59	16.73	15.82	18.67	18.67	17.54	18.39	17.1	16.4	16.94	17.2	16.5	16.32	16.65	23.0


mg/L - Milligrams per Liter.
ng/L - Nanograms per Liter.
S.U. - Standard Units.
umhos/cm - Micromohs per Centimeter.
mV - Millivolts.
°C - Degrees Celsius.
J - Value is estimated.
B - Blank Contamination.
NA - Not Analyzed.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

Table D-8. Bioattenuation Parameter Results for Groundwater Samples Collected in Reactive Zone 4 East, RACER Trust, Moraine, Ohio.


RZ-4 East		Upgradient Well WEST			Upgradient Well GM-19S																			
Constituents	Units	9/21/99	2/23/00	5/25/00	9/20/99	2/23/00	5/24/00	9/22/00	3/19/01	11/20/01	12/11/01	6/12/02	9/26/02	5/21/03	9/25/03	9/13/04	10/18/05	9/21/06	9/17/07	9/23/08	11/17/09	4/7/10	9/27/10	9/29/11
<u>Inorganics & TOC</u>																								
Nitrate	mg/L	0	0	0	11	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrite	mg/L	17.6	0	0	0	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen, Ammonia	mg/L	<0.30	<0.30	<0.30	<0.30	<0.30	<0.30	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Manganese (Total)	mg/L	0.391	0.038	0.029	0.726	1.09	0.247	0.238	0.191	0.2	0.21B	0.25B	0.39B	0.3J	0.23J	0.25	0.24	0.99	0.28 J	0.16	0.0911	NA	0.169	0.17
Manganese (Dissolved)	mg/L	0.383	<0.010	<0.010	0.185	0.205	0.200	0.187	0.155	0.19	0.18B	0.18B	0.19B	0.2J	0.21J	0.16	0.2	0.94	0.15 J	0.16	0.0900	NA	0.170	0.14
Iron (Total)	mg/L	0.27	0.40	0.37	16.9	39.4	1.19	0.40	0.9	0.091	0.18	0.26	0.44	0.17	0.96	3	0.38	1.6	12.7	7.4	15.2	NA	18.9	11
Iron (Dissolved)	mg/L	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.1	<0.10	< 0.1 U	< 0.10 U	1.4	9.4	7.3	15.1	NA	18.3	9
Iron (Ferrous)	mg/L	0	0	0	0	0	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Sulfate	mg/L	73	129	155	127	131	131	118	113	100	90	110	110	150J	150	110 J	83	95	63	68	25	NA	21	58
Sulfide	mg/L	<1	<1	<1	<1	<1	<1	<1	<1	<1	0.96J	<1.0	<1.0	<1	1.3	1.6	< 1.0 U	< 1 U	< 1 U	< 1 U	1.0 J	NA	0.80 J	< 1.0 U
Total Organic Carbon	mg/L	2	7	3	2	7	5	<1	<1	2B	1	1	3	2	2	1	3	22	6 J	3	10	NA	14	4.6
Chloride	mg/L	260	166	164	247	197	168	165	158	130B	150	140	210	270	300J	310	320	350	400 J	390	460	NA	390	340
<u>Permanent Gases</u>																								
Carbon Dioxide	mg/L	50.41	67.57	61.09	41.85	57.12	50.12	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Oxygen	mg/L	1.30	1.50	2.20	4.43	1.01	1.24	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nitrogen	mg/L	13.24	13.74	17.1	20.87	17.07	17.13	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methane	mg/L	0.001409	0.000217	0.002179	0.009863	0.002712	0.003325	0.003706	0.039	0.005	0.0088	0.002	0.46	0.0021	0.0022	0.0014	< 0.0065 U	0.025	7.5	0.79	25	NA	19	1.3
Carbon Monoxide	mg/L	<0.40	<0.40	<0.40	<0.40	<0.40	<0.40	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<u>Light Hydrocarbon Scan</u>																								
Ethane	ng/L	37	33	57	71	104	139	184	210	300	350	410	730	170	80	48	< 250 U	730	7,800	550	11,000	NA	9,300	870
Ethene	ng/L	100	17	47	55	45	43	36	61	34	27	130	770	78	45	51	< 220 U	550	22,000	30,000	< 120 U	NA	72	1,800
<u>Field Parameters</u>																								
pH	S.U.	6.89	6.97	6.97	7.05	7.05	7.00	7.19	7.14	7.28	7.31	7.09	7.02	6.71	6.93	7.13	5.97	6.84	7.03	7.1	6.93	6.78	7.47	6.33
Specific Conductivity	umhos/cm	1,759	1,640	1,547	1,500	1,784	1,548	1,235	1,097	1,190	1,350	1,052	1,474	1,706	1,726	1,970	1,940	2,150	2,010	2,290	1,951	2,370	1,986	2,150
Dissolved Oxygen	mg/L	0.41	1.73	1.50	0.92	0.30	1.94	1.36	0.96	1.75	0.06	0.9	0.47	2.01	1.87	0	0	0.3	0.43	1.87	0.33	0.80	0.67	2.08
Redox Potential	mV	106.2	139.1	198.3	31.3	149.6	200.1	187.7	320.8	195.6	13	446.3	259.6	178.3	135	160	122	-82	-145	-153	-137.9	-157	-112.5	-150
Temperature	°C	21.44	19.90	19.75	20.85	18.69	20.80	20.09	20.14	19.24	19.1	20.39	20.36	20.22	19.57	18.6	17.6	17.9	17.5	16.9	16.68	17.73	16.43	17.82

mg/L - Milligrams per Liter.
ng/L - Nanograms per Liter.
S.U. - Standard Units.
umhos/cm - Micromohs per Centimeter.
mV - Millivolts.
°C - Degrees Celsius.
J - Value is estimated.
B - Blank Contamination.
NA - Not Analyzed.
U - Constituent not detected above laboratory reporting limit shown.
Samples collected in September 1999 represent baseline conditions.
Carbon source introductions began in December 1999.

GM-23 ERD Analysis







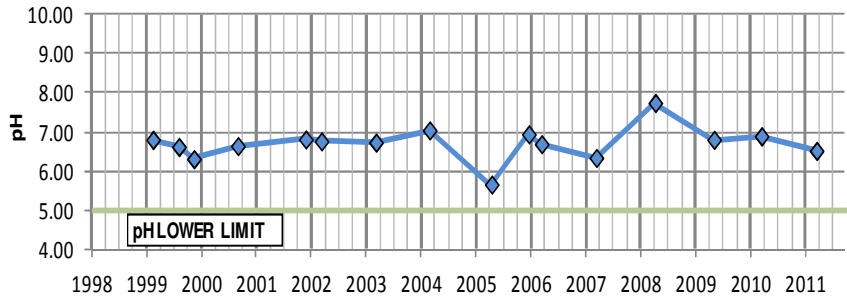


GM-29 ERD Analysis

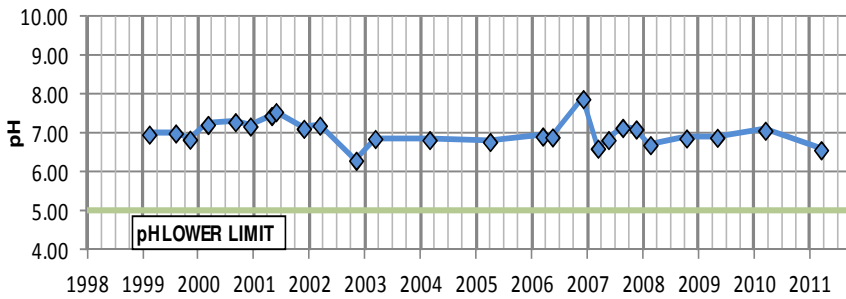

GM-28 ERD Analysis

pH not measured in 2011

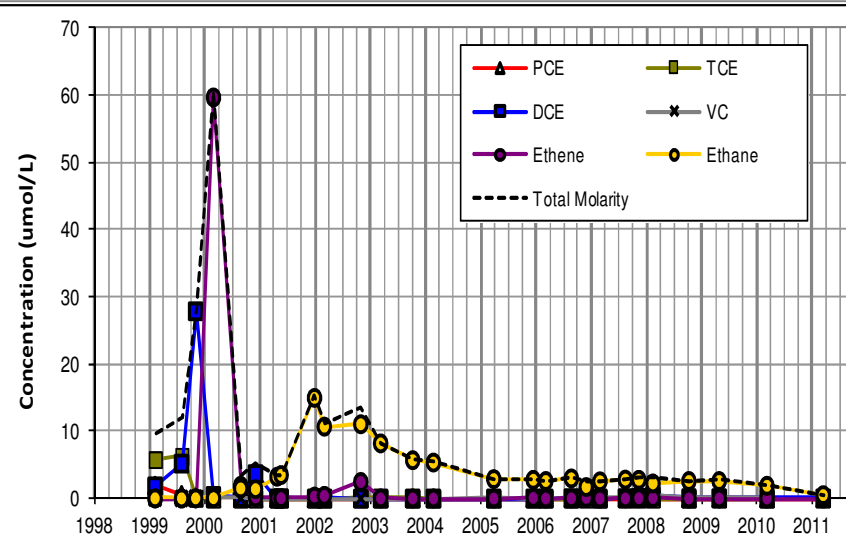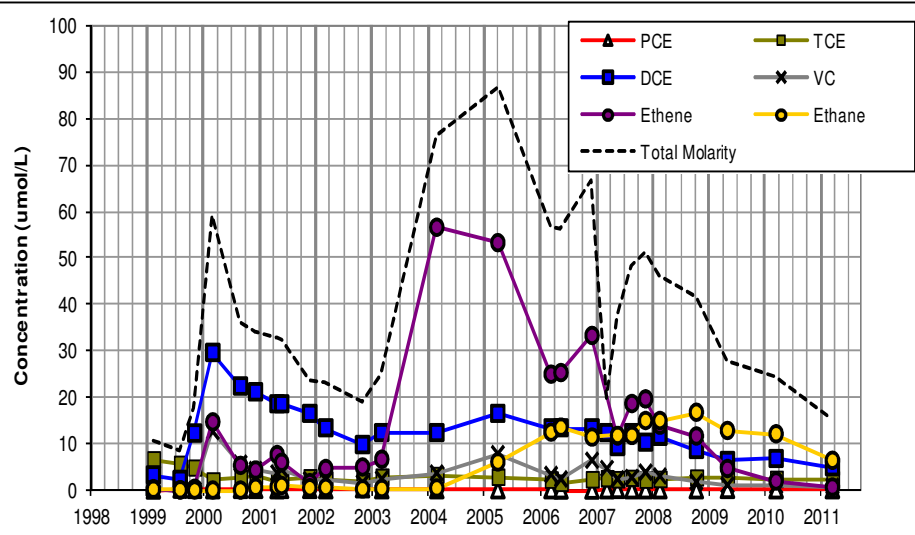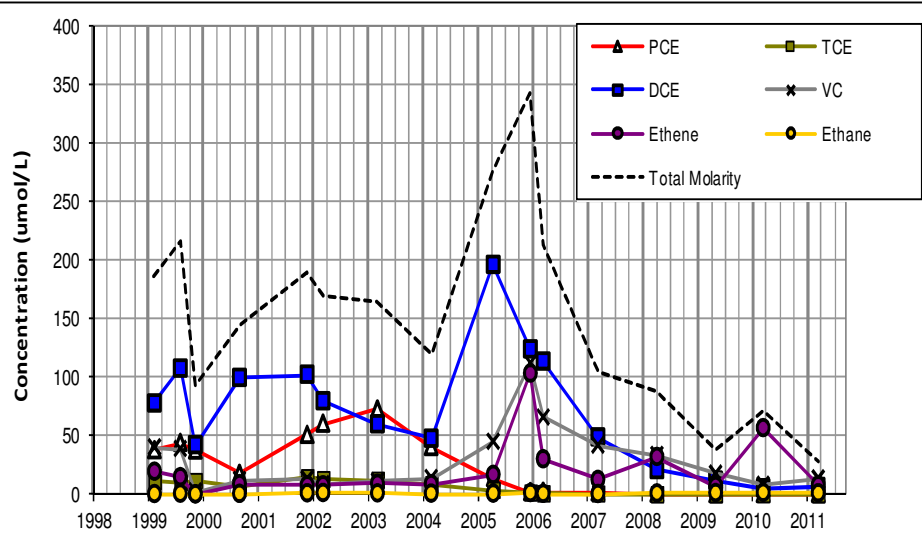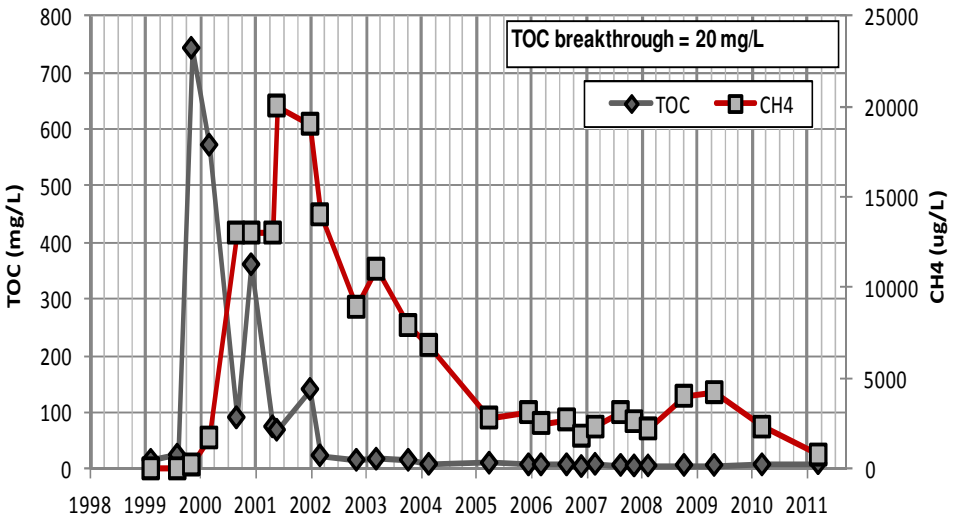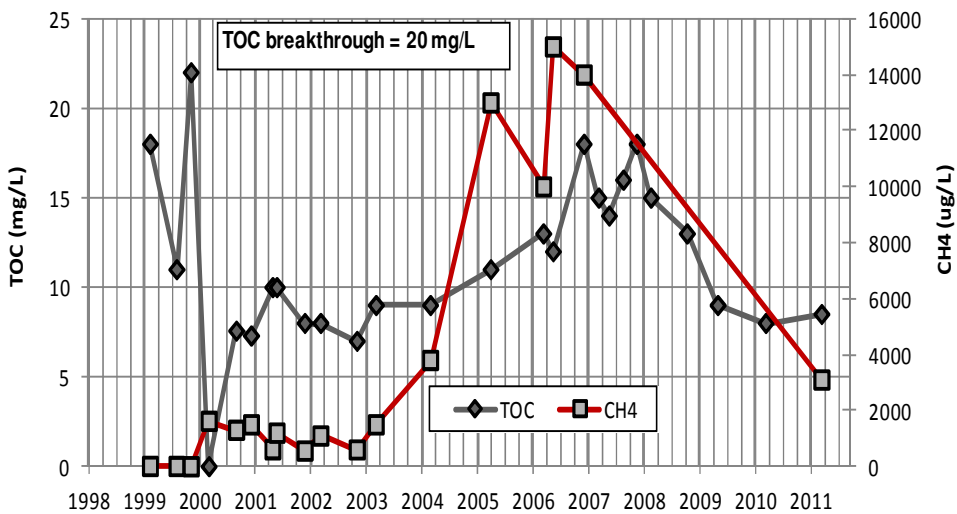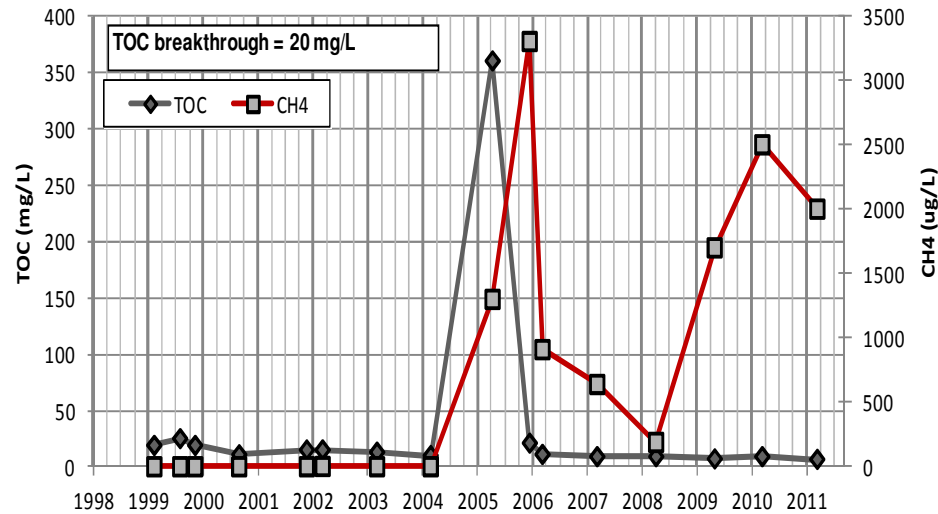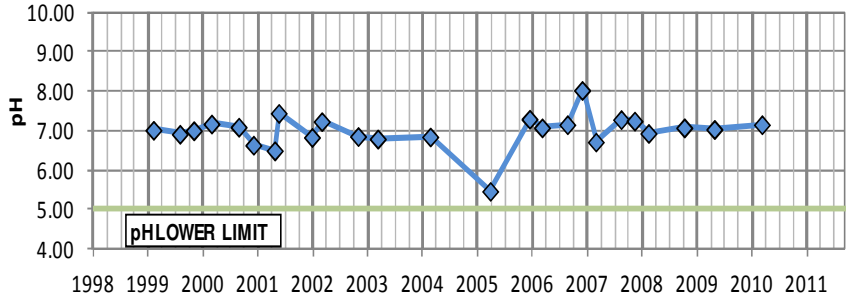


RACER Trust
MORaine, OHIO
OH000294.2012

RZ-1 ERD Analysis (GM-23, GM-29, GM-28)








FIGURE
D-1

GM-8 ERD Analysis

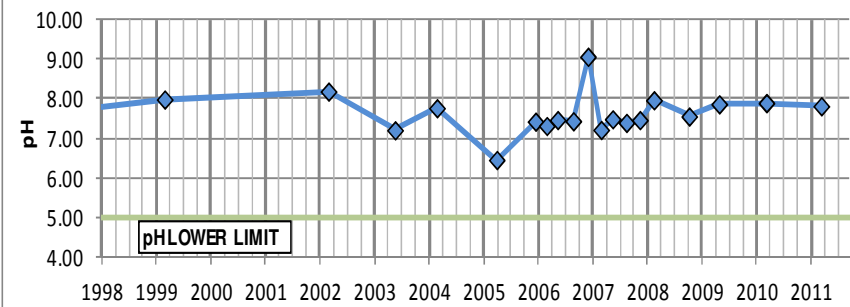

GM-21 ERD Analysis

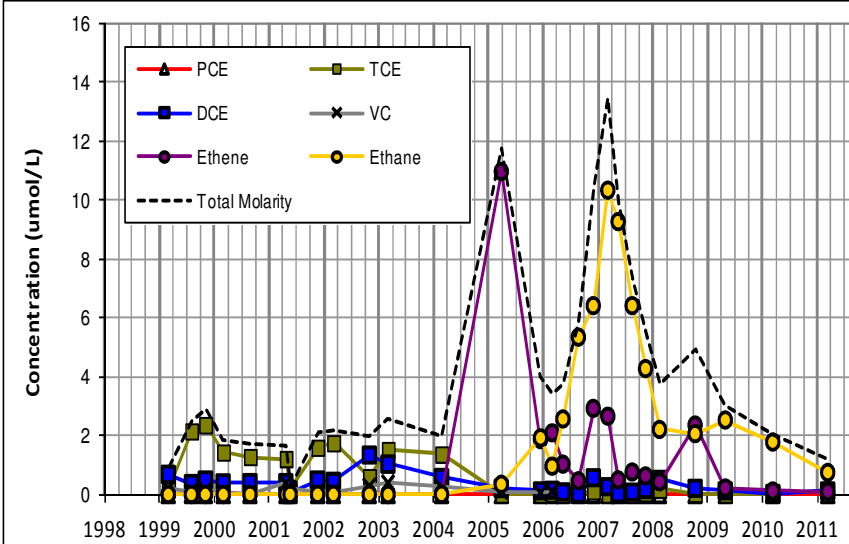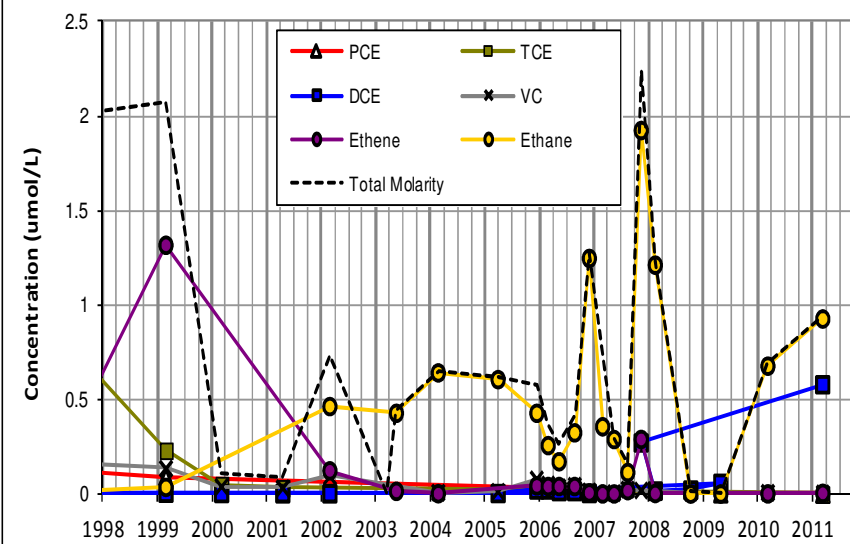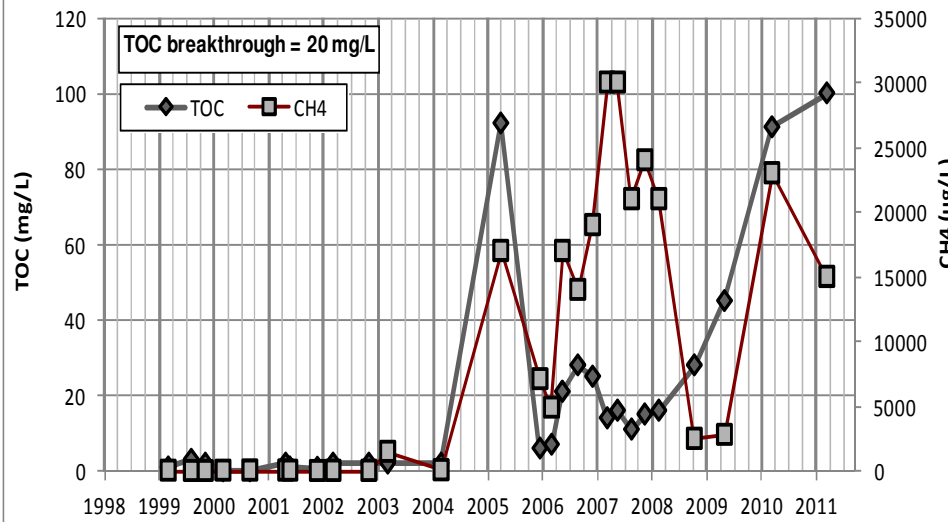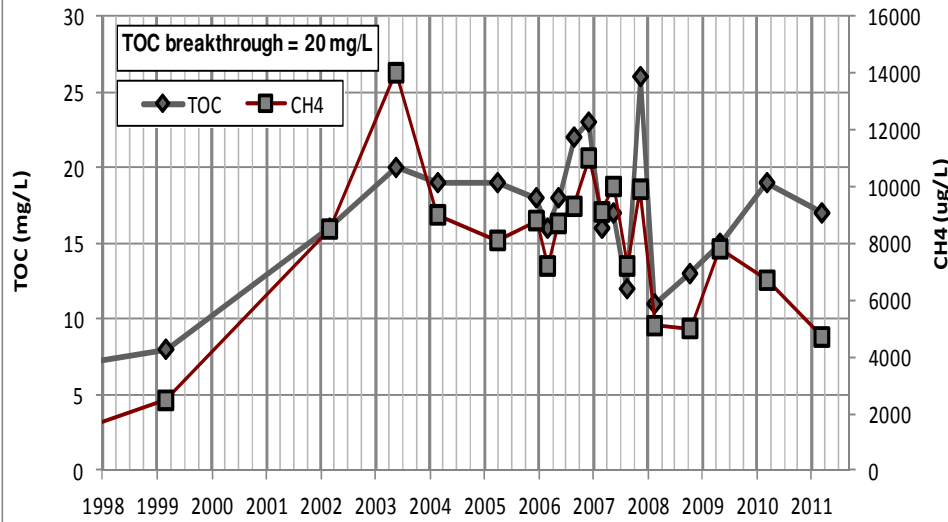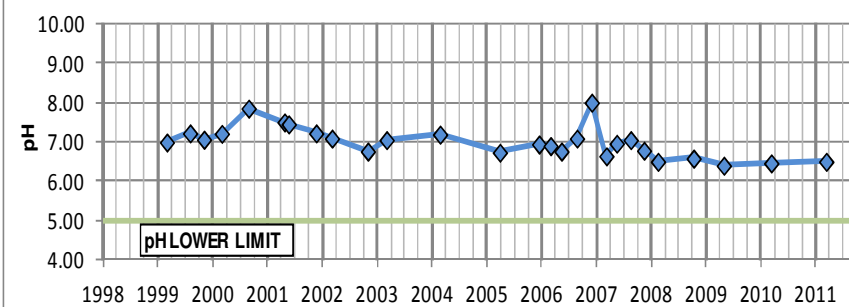




RACER Trust
MORaine, OHIO
OH000294.2012

RZ-3 West/East ERD Analysis
GM-8(West), GM-21(East)



FIGURE
D-2

GM-19S ERD Analysis

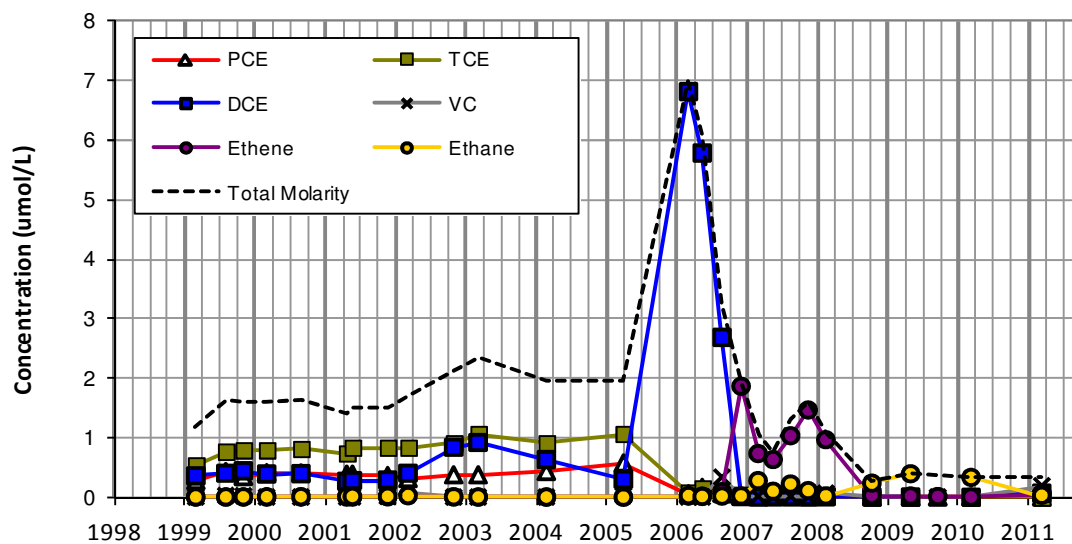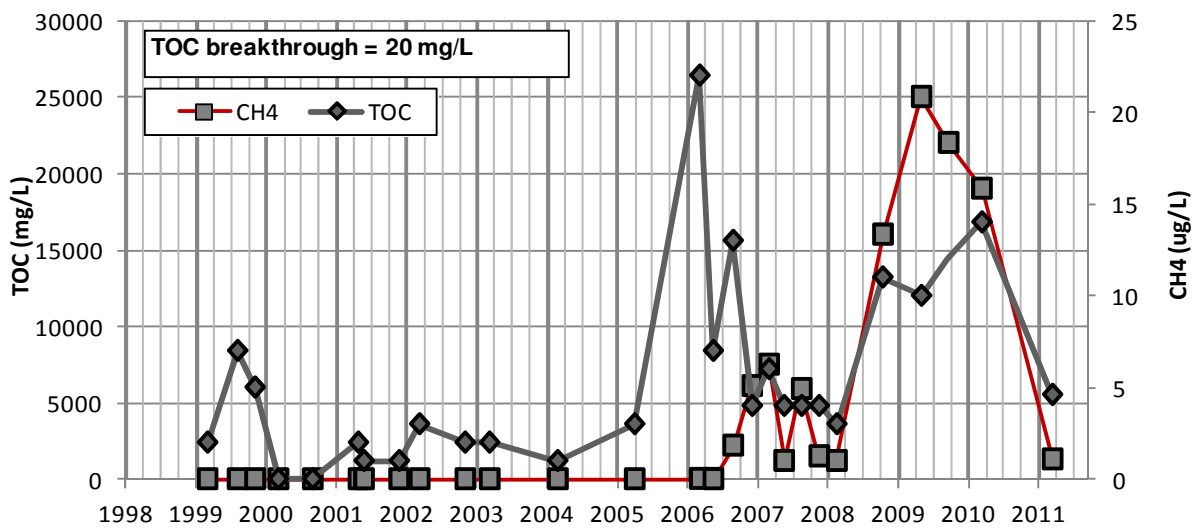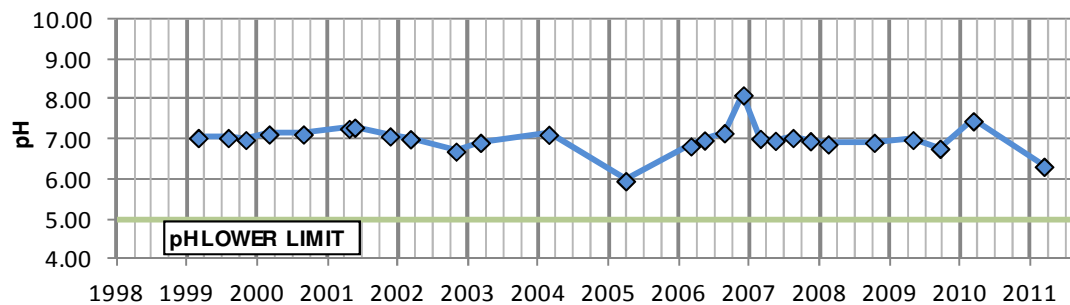

RACER Trust
MORaine, OHIO
OH000294.2012

RZ-4 ERD Analysis (GM-19S)



FIGURE

D-3



Appendix E

Supporting Documentation for
Corrective Action Completion
Evaluation for 2011

**Table E-1: Source Reduction Factors
RACER Trust, Moraine, Ohio**

Potential Receptors Points	Well ID	Model Location (row, column, layer)	Pumping Rates	Potential Source Areas				
				Landfill 1	Landfill 2	Landfill 3	North Settling Lagoon	South Settling Lagoon
Shallow Treatment Well	TW-2	(215,144,1)	0	1.00E+00	1.47E-03	2.36E-05	4.50E-06	0.00E+00
Dryden North Well	DN-13	(225,117,3-4)	0	1.80E-01	8.24E-02	7.35E-03	8.23E-03	1.80E-02
Dryden South Well	DS-7	(249,118,3)	0	6.73E-01	4.04E-03	1.71E-04	1.29E-04	7.56E-05
Miami Shores Well Field	MS-14	(252,75,3-5)	0	2.02E-01	1.39E-01	3.94E-02	5.77E-02	1.87E-01
	MS-15	(245,79,3-5)						
	MS-16	(246,70,3-5)	0	6.02E-02	1.51E-01	7.61E-02	1.19E-01	3.05E-01
	MS-17	(250,66,3-5)						
	MS-18	(254,62,3-5)	0	1.79E-01	1.17E-01	5.70E-02	8.83E-02	2.15E-01
	MS-19	(255,70,3-5)						
	MS-20	(257,63,3-5)						
	MS-21	(256,54,3-5)	0	1.89E-02	1.02E-01	8.42E-02	1.34E-01	3.15E-01
	MS-22	(257,49,3-5)	0	4.41E-03	6.22E-02	7.08E-02	1.15E-01	2.63E-01
Moraine Assembly Production Wells	11B	(116,224,3)	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	12A	(108,226,3)	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Moraine Engine Well 28	28	(58,80,3)	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Moraine Engine Plant	31	(86,210,3)	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	39	(40,81,3)	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Harrison Production Wells	44	(29,70,3)	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	42	(54,59,3)	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	45	(74,56,3)	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
West Carrollton Well Field	WC-1	(282,27,3-5)	259	8.44E-06	2.65E-03	7.60E-03	1.14E-02	5.51E-03
	WC-3	(280,31,3-5)	259	1.51E-04	1.00E-02	2.19E-02	3.44E-02	4.00E-02
	WC-4	(281,29,3-5)	259	5.12E-05	6.01E-03	1.45E-02	1.03E-02	1.90E-02
Miami River	--	--	--	6.76E-07	2.74E-04	1.02E-03	1.47E-03	4.25E-04

Notes:

1. Source reduction factors reflect updated groundwater model results generated using current site pumping conditions without interim measures pumping (Pumping Scenario 1a, ARCADIS Inc., 2008)
2. Shaded cells indicate those potential receptor wells which are not pumping in pumping Scenario 1a (i.e., current conditions without interim measures pumping).
3. Dilution factors reported for the Miami River are mass loading factors to the river [$\text{lb/day}/\text{mg/L}$]

TABLE E-2: Preliminary Remediation Target Levels (Updated February 2010)
RACER Trust, Moraine, Ohio

Remediation Target Levels (mg/L) - Upper Aquifer

			Constituent of Concern					monitoring wells
Point of Compliance <i>GM-26</i>			<i>PCE</i>	<i>TCE</i>	<i>1,1-DCE</i>	<i>cis-1,2-DCE</i>	<i>Vinyl Chloride</i>	
Allowable POC Concentration (mg/L):			<i>0.005</i>	<i>0.005</i>	<i>0.007</i>	<i>0.070</i>	<i>0.002</i>	
Estimated Remediation Target Level at AOI 7 (mg/L):			<i>0.500</i>	<i>0.500</i>	<i>0.700</i>	<i>7.000</i>	<i>0.200</i>	
Distance from AOI 7 (monitoring zone)	Source Reduction Factor ¹	Normalized Remediation Target	Remediation Target (mg/L)	Remediation Target (mg/L)	Remediation Target (mg/L)	Remediation Target (mg/L)	Remediation Target (mg/L)	
140 ft (Zone S1)	0.90	90	0.450	0.450	0.630	6.300	0.180	GM-28
1190 ft (Zone S1 to Zone S2)	0.19	19	0.095	0.095	0.133	1.330	0.038	GM-28, <i>ME-6</i>
2240 ft (Zone S2)	0.10	10	0.050	0.050	0.070	0.700	0.020	<i>ME-6, ME-3, GM-31</i>
2940 ft (Zone S2 to Zone S3)	0.09	9	0.045	0.045	0.063	0.630	0.018	<i>ME-6, ME-3, GM-31, GM-22, GM-33, GM-35, W-4-S, (GM-19S), and (EAST)</i>
3640 ft (Zone S3)	0.07	7	0.035	0.035	0.049	0.490	0.014	GM-32, GM-21, (W-4-S), <i>GM-63</i> , and <i>GM-64</i>
4430 ft (Zone S3 to GM-10)	0.05	5	0.025	0.025	0.035	0.350	0.010	GM-47, GM-50, <i>GM-51, GM-63, GM-64</i> , GM-32, GM-21, GM-8, GM-6, (4S), GM-2, GM-16, (GM-17), <i>GM-18, WSU-24, (W-4-S)</i> , and (GM-10)
5215 ft (GM-10/GM-52)	0.04	4	0.020	0.020	0.028	0.280	0.008	GM-10 and GM-52
6370 ft (POC)	0.01	1	0.005	0.005	0.007	0.070	0.002	GM-26

Remediation Target Level (mg/L) - Lower Aquifer

			Constituent of Concern					monitoring wells
Point of Compliance <i>GM-11, GM-15 and GM-20D</i>			<i>PCE</i>	<i>TCE</i>	<i>1,1-DCE</i>	<i>cis-1,2-DCE</i>	<i>Vinyl Chloride</i>	
Allowable POC Concentration (mg/L):			<i>0.005</i>	<i>0.005</i>	<i>0.007</i>	<i>0.070</i>	<i>0.002</i>	
Estimated Remediation Target Level at AOI 7 (mg/L):			<i>0.167</i>	<i>0.167</i>	<i>0.233</i>	<i>2.333</i>	<i>0.067</i>	
Distance from AOI 7 (monitoring zone)	Source Reduction Factor ¹	Normalized Remediation Target	Remediation Target (mg/L)	Remediation Target (mg/L)	Remediation Target (mg/L)	Remediation Target (mg/L)	Remediation Target (mg/L)	
2000 ft (GM-40/41/54)	0.26	8.7	0.043	0.043	0.061	0.607	0.017	GM-40, GM-41, and GM-54
2900 ft (Well GM-42)	0.14	4.7	0.023	0.023	0.033	0.327	0.009	GM-42 (replaces Well 32)
3600 ft (Well GM-19D)	0.09	3.0	0.015	0.015	0.021	0.210	0.006	GM-19D
4250 ft (Zone D2)	0.055	1.8	0.009	0.009	0.013	0.128	0.004	<i>GM-1 and GM-3</i>
4900 ft (POC)	0.03	1.0	0.005	0.005	0.007	0.070	0.002	GM-11, GM-15 and GM-20D

Notes

1. Source Reduction Factors reflect updated groundwater model results generated using current site conditions without interim measures pumping (ARCADIS Inc., 2008).
2. Monitoring wells in parenthesis are those that were previously removed from the list of wells considered applicable to the particular remediation zone.
3. Monitoring wells in *italics* are those with a revised monitoring frequency of once every five years (ARCADIS Inc., 2009).

Table E-3. Mann-Kendall Trend Test Results, Closed North and South Settling Lagoon Groundwater Monitoring, RACER Trust, Moraine, Ohio.

Settling Lagoon	Upgradient/ Downgradient	Well	Chemical	n	Number of Detections	Detection Frequency	S	p-value*	Trend Test Conclusion (at 0.05 level of significance)
North	Upgradient	HR-04	1,1,1-Trichloroethane	11	1	9%	10	> 0.05	No Trend
North	Downgradient	W-2-N	1,1,1-Trichloroethane	11	3	27%	11	> 0.05	No Trend
North	Downgradient	W-3-N	1,1,1-Trichloroethane	11	0	0%	-36	> 0.05	No Trend
North	Downgradient	W-4-N	1,1,1-Trichloroethane	11	8	73%	18	> 0.05	No Trend
North	Upgradient	HR-04	1,1-Dichloroethane	11	8	73%	46	> 0.05	Increasing Trend
North	Downgradient	W-2-N	1,1-Dichloroethane	11	6	55%	11	> 0.05	No Trend
North	Downgradient	W-3-N	1,1-Dichloroethane	11	0	0%	-36	> 0.05	No Trend
North	Downgradient	W-4-N	1,1-Dichloroethane	11	11	100%	33	> 0.05	Increasing Trend
North	Upgradient	HR-04	1,1-Dichloroethene	11	0	0%	0	> 0.05	No Trend
North	Downgradient	W-2-N	1,1-Dichloroethene	11	0	0%	0	> 0.05	No Trend
North	Downgradient	W-3-N	1,1-Dichloroethene	11	0	0%	-36	> 0.05	No Trend
North	Downgradient	W-4-N	1,1-Dichloroethene	11	0	0%	0	> 0.05	No Trend
North	Upgradient	HR-04	Benzene	11	0	0%	0	> 0.05	No Trend
North	Downgradient	W-2-N	Benzene	11	0	0%	0	> 0.05	No Trend
North	Downgradient	W-3-N	Benzene	11	0	0%	-36	> 0.05	No Trend
North	Downgradient	W-4-N	Benzene	11	0	0%	0	> 0.05	No Trend
North	Upgradient	HR-04	cis-1,2-Dichloroethene	11	3	27%	18	> 0.05	No Trend
North	Downgradient	W-2-N	cis-1,2-Dichloroethene	11	11	100%	8	> 0.05	No Trend
North	Downgradient	W-3-N	cis-1,2-Dichloroethene	11	11	100%	-39	> 0.05	Decreasing Trend
North	Downgradient	W-4-N	cis-1,2-Dichloroethene	11	11	100%	33	> 0.05	Increasing Trend
North	Upgradient	HR-04	Ethylbenzene	11	0	0%	0	> 0.05	No Trend
North	Downgradient	W-2-N	Ethylbenzene	11	0	0%	0	> 0.05	No Trend
North	Downgradient	W-3-N	Ethylbenzene	11	0	0%	-36	> 0.05	No Trend
North	Downgradient	W-4-N	Ethylbenzene	11	0	0%	0	> 0.05	No Trend
North	Upgradient	HR-04	Tetrachloroethene	11	10	91%	-25	> 0.05	No Trend
North	Downgradient	W-2-N	Tetrachloroethene	11	1	9%	4	> 0.05	No Trend
North	Downgradient	W-3-N	Tetrachloroethene	11	5	45%	-33	> 0.05	Decreasing Trend
North	Downgradient	W-4-N	Tetrachloroethene	11	11	100%	-14	> 0.05	No Trend
North	Upgradient	HR-04	Toluene	11	0	0%	0	> 0.05	No Trend
North	Downgradient	W-2-N	Toluene	11	1	9%	-2	> 0.05	No Trend
North	Downgradient	W-3-N	Toluene	11	0	0%	-36	> 0.05	No Trend
North	Downgradient	W-4-N	Toluene	11	0	0%	0	> 0.05	No Trend

Footnotes on Page 4

Table E-3. Mann-Kendall Trend Test Results, Closed North and South Settling Lagoon Groundwater Monitoring, RACER Trust, Moraine, Ohio.

Settling Lagoon	Upgradient/ Downgradient	Well	Chemical	n	Number of Detections	Detection Frequency	S	p-value*	Trend Test Conclusion (at 0.05 level of significance)
North	Upgradient	HR-04	trans-1,2-Dichloroethene	11	0	0%	28	> 0.05	No Trend
North	Downgradient	W-2-N	trans-1,2-Dichloroethene	11	2	18%	21	> 0.05	No Trend
North	Downgradient	W-3-N	trans-1,2-Dichloroethene	11	10	91%	-38	> 0.05	Decreasing Trend
North	Downgradient	W-4-N	trans-1,2-Dichloroethene	11	8	73%	24	> 0.05	No Trend
North	Upgradient	HR-04	Trichloroethene	11	10	91%	-42	> 0.05	Decreasing Trend
North	Downgradient	W-2-N	Trichloroethene	11	8	73%	-29	> 0.05	Decreasing Trend
North	Downgradient	W-3-N	Trichloroethene	11	2	18%	-31	> 0.05	Decreasing Trend
North	Downgradient	W-4-N	Trichloroethene	11	11	100%	23	> 0.05	No Trend
North	Upgradient	HR-04	Vinyl Chloride	11	0	0%	0	> 0.05	No Trend
North	Downgradient	W-2-N	Vinyl Chloride	11	0	0%	0	> 0.05	No Trend
North	Downgradient	W-3-N	Vinyl Chloride	11	11	100%	-33	> 0.05	Decreasing Trend
North	Downgradient	W-4-N	Vinyl Chloride	11	8	73%	-6	> 0.05	No Trend
North	Upgradient	HR-04	Xylene (total)	11	0	0%	28	> 0.05	No Trend
North	Downgradient	W-2-N	Xylene (total)	11	0	0%	28	> 0.05	No Trend
North	Downgradient	W-3-N	Xylene (total)	11	0	0%	-5	> 0.05	No Trend
North	Downgradient	W-4-N	Xylene (total)	11	0	0%	28	> 0.05	No Trend

Footnotes on Page 4

Table E-3. Mann-Kendall Trend Test Results, Closed North and South Settling Lagoon Groundwater Monitoring, RACER Trust, Moraine, Ohio.

Settling Lagoon	Upgradient/ Downgradient	Well	Chemical	n	Number of Detections	Detection Frequency	S	p-value*	Trend Test Conclusion (at 0.05 level of significance)
South	Upgradient	HR-17	1,1,1-Trichloroethane	11	2	18%	10	> 0.05	No Trend
South	Downgradient	W-2-S	1,1,1-Trichloroethane	11	11	100%	-4	> 0.05	No Trend
South	Downgradient	W-3-S	1,1,1-Trichloroethane	11	11	100%	-27	> 0.05	No Trend
South	Downgradient	W-4-S	1,1,1-Trichloroethane	15	15	100%	-78	> 0.05	Decreasing Trend
South	Upgradient	HR-17	1,1-Dichloroethane	11	9	82%	25	> 0.05	No Trend
South	Downgradient	W-2-S	1,1-Dichloroethane	11	11	100%	14	> 0.05	No Trend
South	Downgradient	W-3-S	1,1-Dichloroethane	11	3	27%	-8	> 0.05	No Trend
South	Downgradient	W-4-S	1,1-Dichloroethane	15	15	100%	52	> 0.05	Increasing Trend
South	Upgradient	HR-17	1,1-Dichloroethene	11	0	0%	21	> 0.05	No Trend
South	Downgradient	W-2-S	1,1-Dichloroethene	11	0	0%	0	> 0.05	No Trend
South	Downgradient	W-3-S	1,1-Dichloroethene	11	0	0%	10	> 0.05	No Trend
South	Downgradient	W-4-S	1,1-Dichloroethene	15	1	7%	-8	> 0.05	No Trend
South	Upgradient	HR-17	Benzene	11	0	0%	21	> 0.05	No Trend
South	Downgradient	W-2-S	Benzene	11	1	9%	-6	> 0.05	No Trend
South	Downgradient	W-3-S	Benzene	11	0	0%	10	> 0.05	No Trend
South	Downgradient	W-4-S	Benzene	15	0	0%	0	> 0.05	No Trend
South	Upgradient	HR-17	cis-1,2-Dichloroethene	11	9	82%	-5	> 0.05	No Trend
South	Downgradient	W-2-S	cis-1,2-Dichloroethene	11	10	91%	1	> 0.05	No Trend
South	Downgradient	W-3-S	cis-1,2-Dichloroethene	11	4	36%	32	> 0.05	Increasing Trend
South	Downgradient	W-4-S	cis-1,2-Dichloroethene	15	15	100%	82	> 0.05	Increasing Trend
South	Upgradient	HR-17	Ethylbenzene	11	0	0%	21	> 0.05	No Trend
South	Downgradient	W-2-S	Ethylbenzene	11	0	0%	0	> 0.05	No Trend
South	Downgradient	W-3-S	Ethylbenzene	11	0	0%	0	> 0.05	No Trend
South	Downgradient	W-4-S	Ethylbenzene	15	0	0%	14	> 0.05	No Trend
South	Upgradient	HR-17	Tetrachloroethene	11	11	100%	29	> 0.05	Increasing Trend
South	Downgradient	W-2-S	Tetrachloroethene	11	5	45%	-22	> 0.05	No Trend
South	Downgradient	W-3-S	Tetrachloroethene	11	11	100%	27	> 0.05	No Trend
South	Downgradient	W-4-S	Tetrachloroethene	15	15	100%	73	> 0.05	Increasing Trend
South	Upgradient	HR-17	Toluene	11	0	0%	21	> 0.05	No Trend
South	Downgradient	W-2-S	Toluene	11	1	9%	6	> 0.05	No Trend
South	Downgradient	W-3-S	Toluene	11	0	0%	0	> 0.05	No Trend
South	Downgradient	W-4-S	Toluene	15	1	7%	23	> 0.05	No Trend

Footnotes on Page 4

Table E-3. Mann-Kendall Trend Test Results, Closed North and South Settling Lagoon Groundwater Monitoring, RACER Trust, Moraine, Ohio.

Settling Lagoon	Upgradient/ Downgradient	Well	Chemical	n	Number of Detections	Detection Frequency	S	p-value*	Trend Test Conclusion (at 0.05 level of significance)
South	Upgradient	HR-17	trans-1,2-Dichloroethene	11	9	82%	19	> 0.05	No Trend
South	Downgradient	W-2-S	trans-1,2-Dichloroethene	11	0	0%	28	> 0.05	Increasing Trend
South	Downgradient	W-3-S	trans-1,2-Dichloroethene	11	1	9%	14	> 0.05	No Trend
South	Downgradient	W-4-S	trans-1,2-Dichloroethene	15	15	100%	76	> 0.05	Increasing Trend
South	Upgradient	HR-17	Trichloroethene	11	11	100%	30	> 0.05	Increasing Trend
South	Downgradient	W-2-S	Trichloroethene	11	11	100%	22	> 0.05	No Trend
South	Downgradient	W-3-S	Trichloroethene	11	11	100%	13	> 0.05	No Trend
South	Downgradient	W-4-S	Trichloroethene	15	15	100%	70	> 0.05	Increasing Trend
South	Upgradient	HR-17	Vinyl Chloride	11	0	0%	21	> 0.05	No Trend
South	Downgradient	W-2-S	Vinyl Chloride	11	0	0%	0	> 0.05	No Trend
South	Downgradient	W-3-S	Vinyl Chloride	11	0	0%	0	> 0.05	No Trend
South	Downgradient	W-4-S	Vinyl Chloride	15	0	0%	0	> 0.05	No Trend
South	Upgradient	HR-17	Xylene (total)	11	0	0%	32	> 0.05	Increasing Trend
South	Downgradient	W-2-S	Xylene (total)	11	0	0%	28	> 0.05	Increasing Trend
South	Downgradient	W-3-S	Xylene (total)	11	0	0%	28	> 0.05	Increasing Trend
South	Downgradient	W-4-S	Xylene (total)	15	0	0%	44	> 0.05	Increasing Trend


* Indicated p-value represents the significance of both the upper and lower tails combined.

Bold - Increasing trends that are statistically significant in downgradient monitoring wells are shown in bold font.


Shaded - An increasing trend is shaded if the detection frequency is 40% or greater, or if the three most recent sampling results were over the analytical detection limit.

Trends identified by the model were not reported if the detection frequency was less than 10%.


1,1,1-Trichloroethane

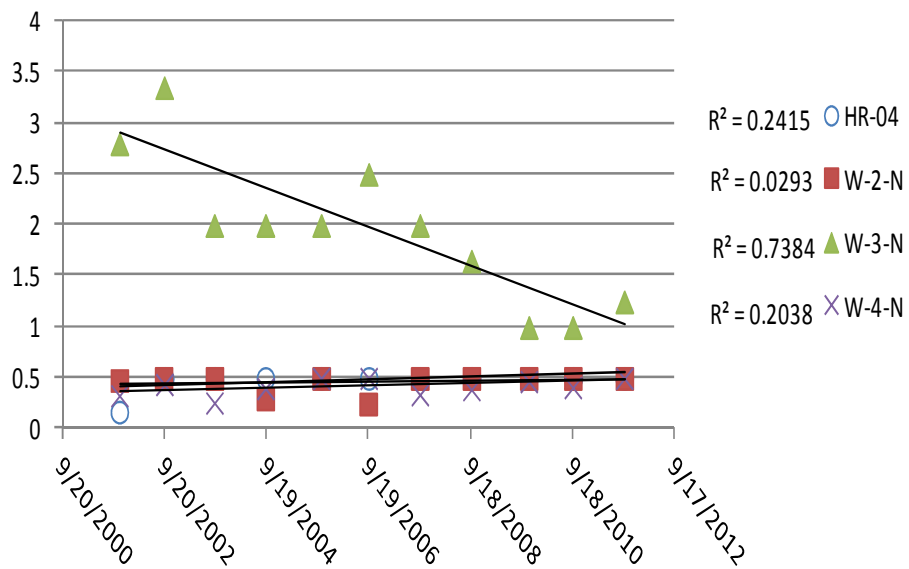


1,1-Dichloroethane

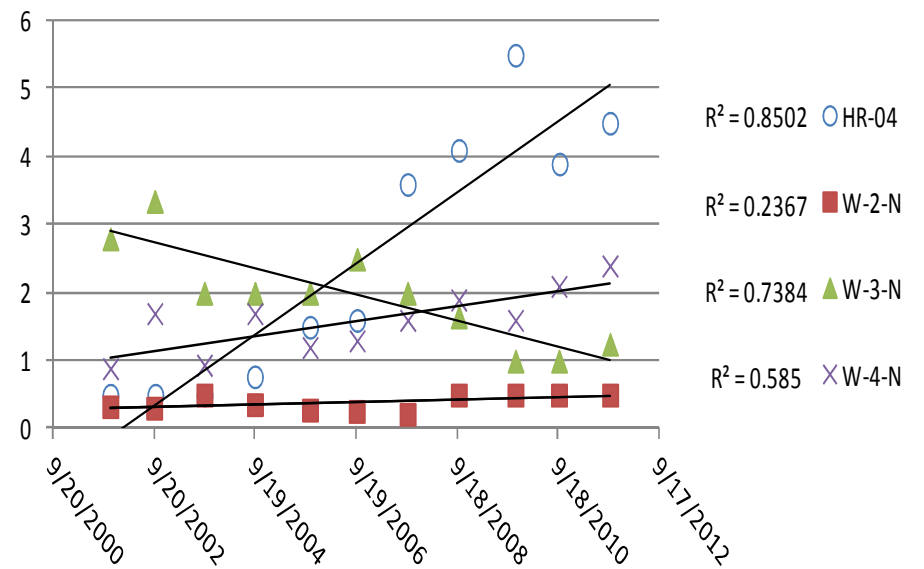


cis-1,2-Dichloroethene

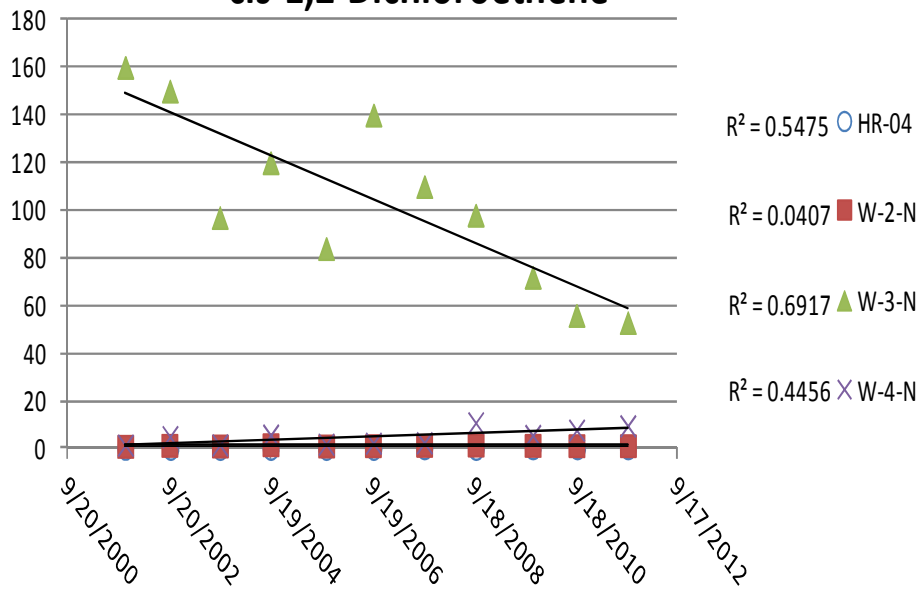


Tetrachloroethene

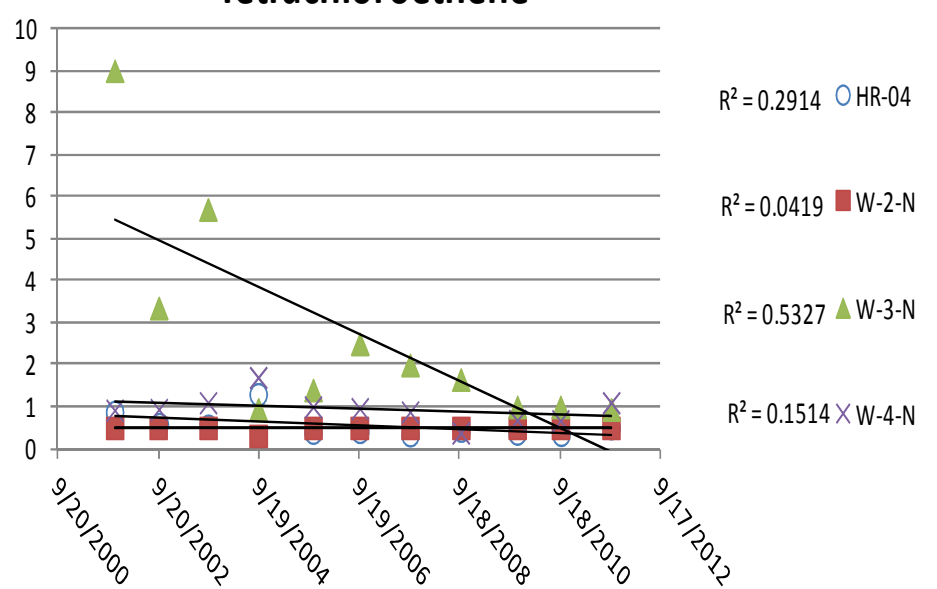


Toluene

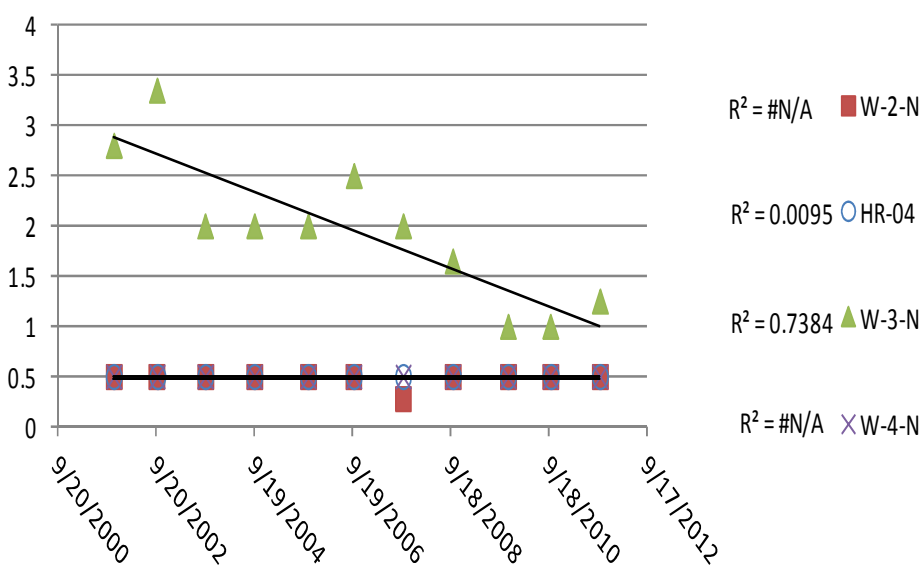


Trans-1,2-Dichloroethene

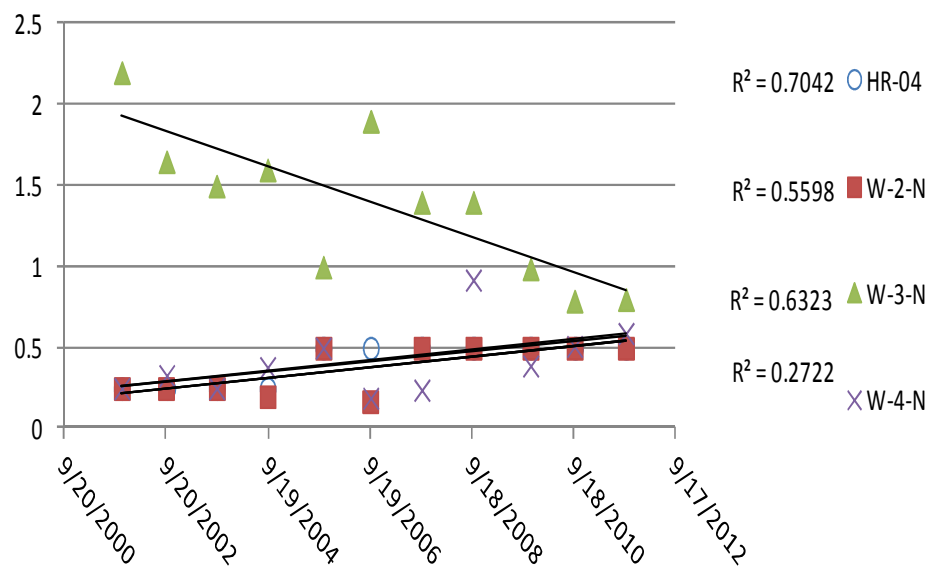

Trichloroethene

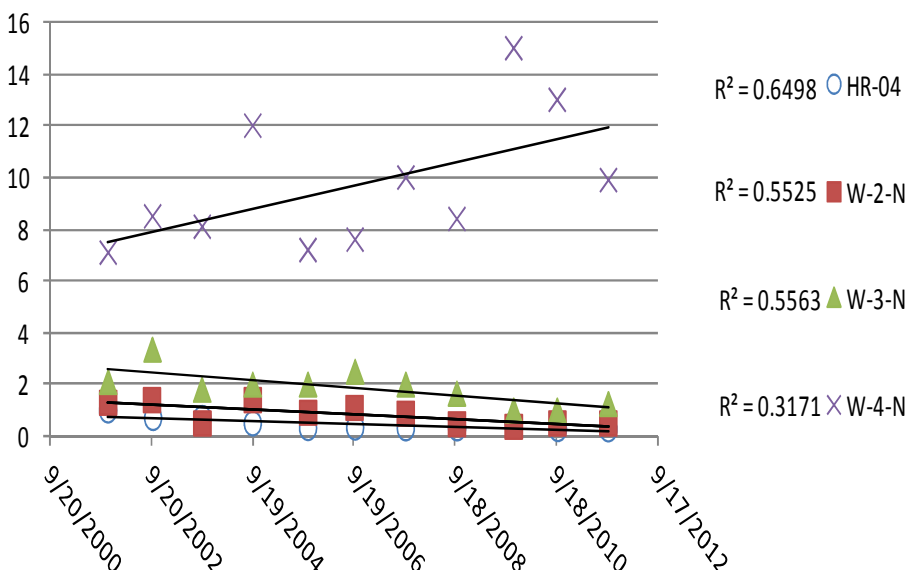

Vinyl Chloride

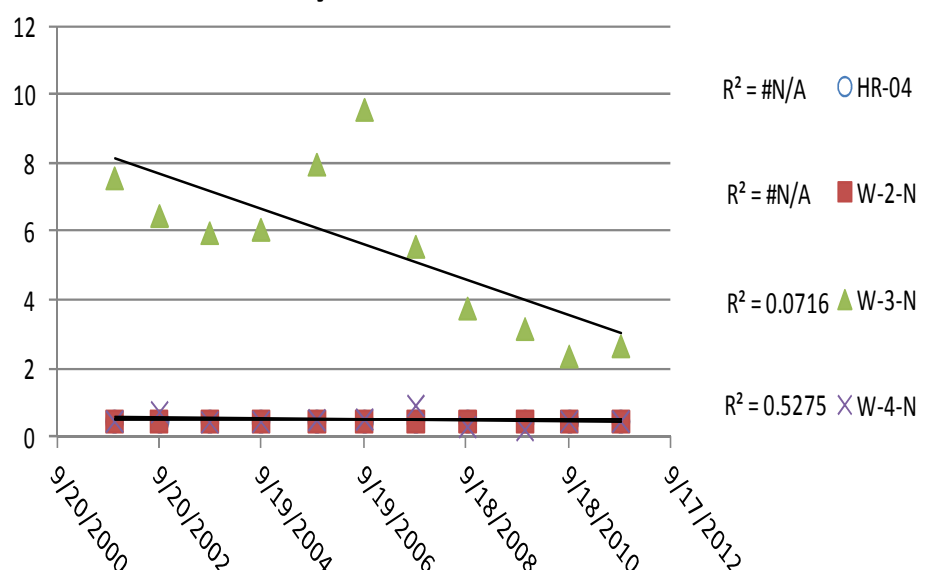

Note: $R^2 = \text{\#N/A}$ refers to a slope of zero


RACER Trust
MORAIN, OHIO
OH000294.2012

North Settling Lagoon
Linear Regression Graphs




FIGURE
E-1


1,1,1-Trichloroethane

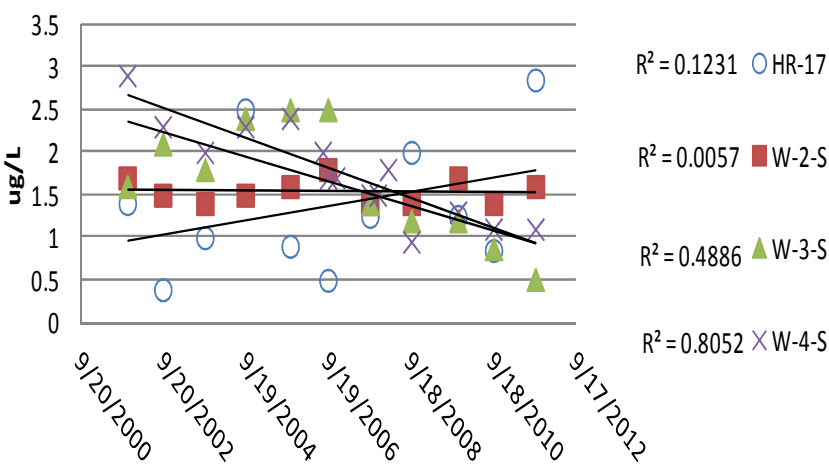


1,1-Dichloroethane

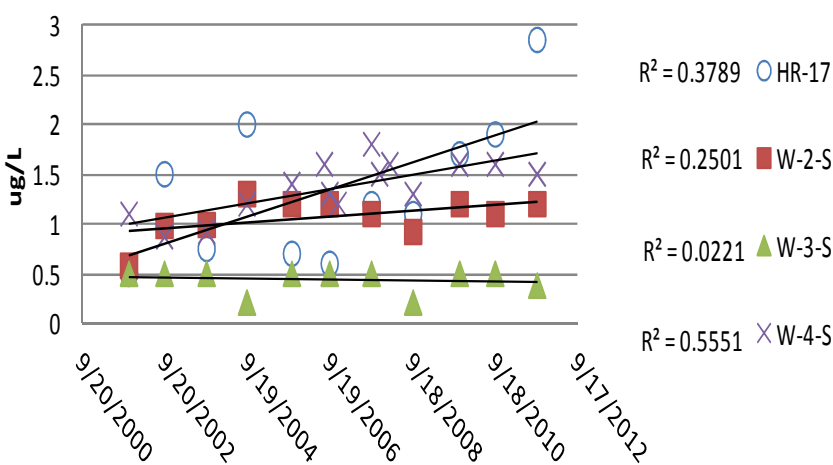


cis-1,2-Dichloroethene

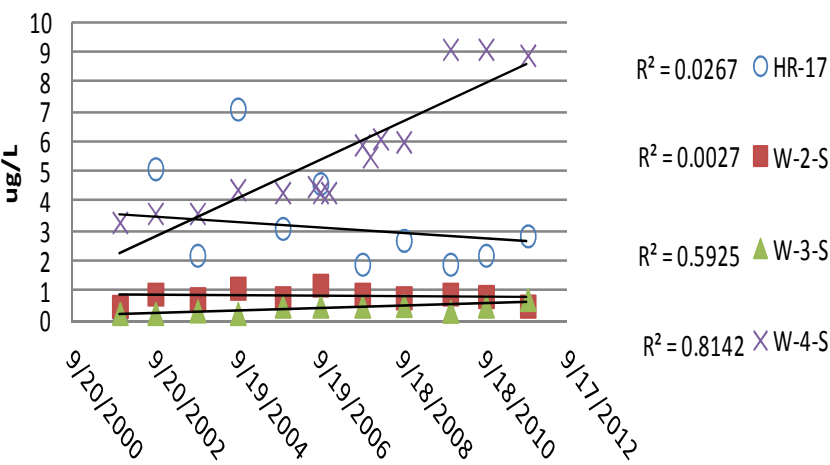


Tetrachloroethene

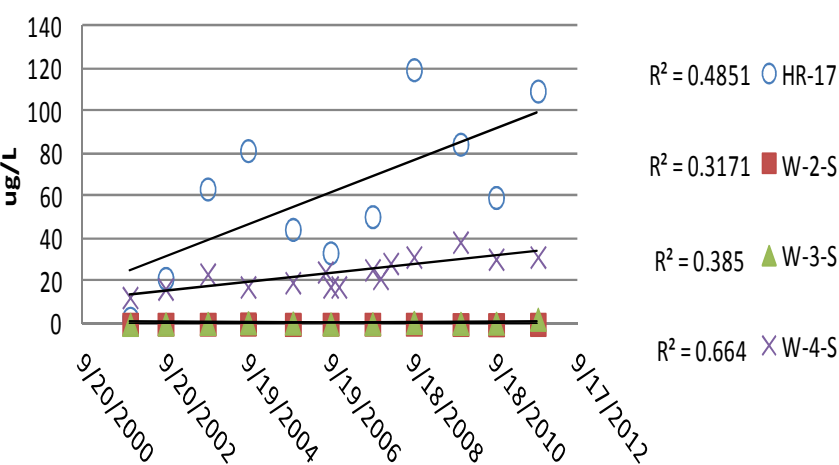


Toluene

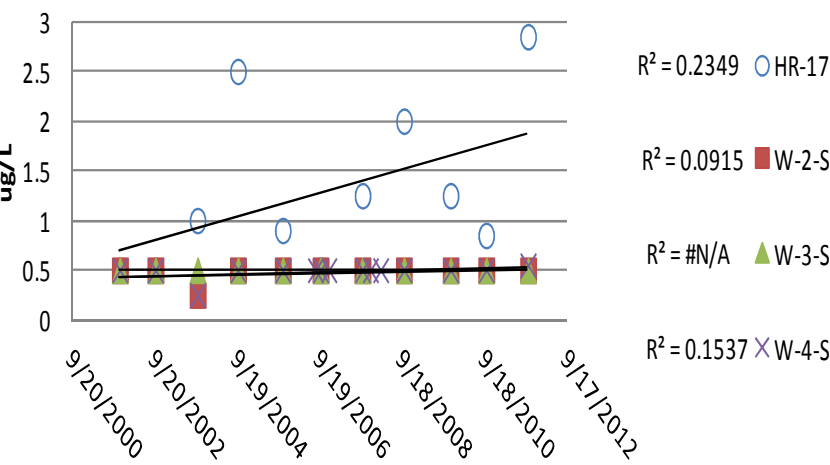


trans-1,2-Dichloroethene

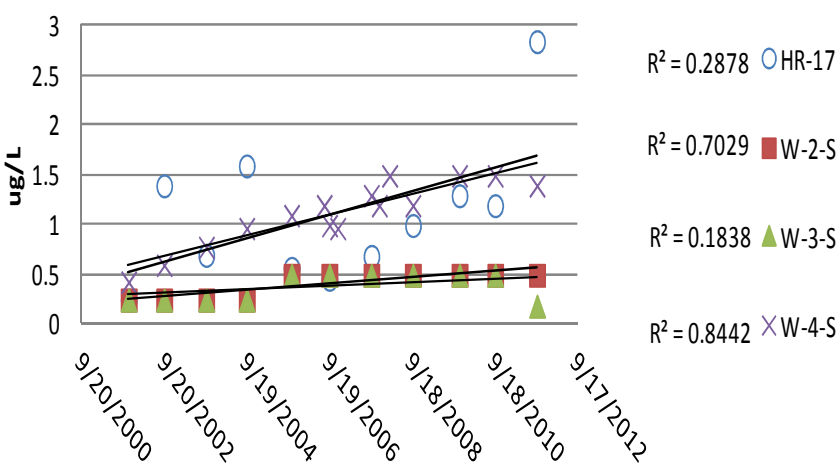

Trichloroethene

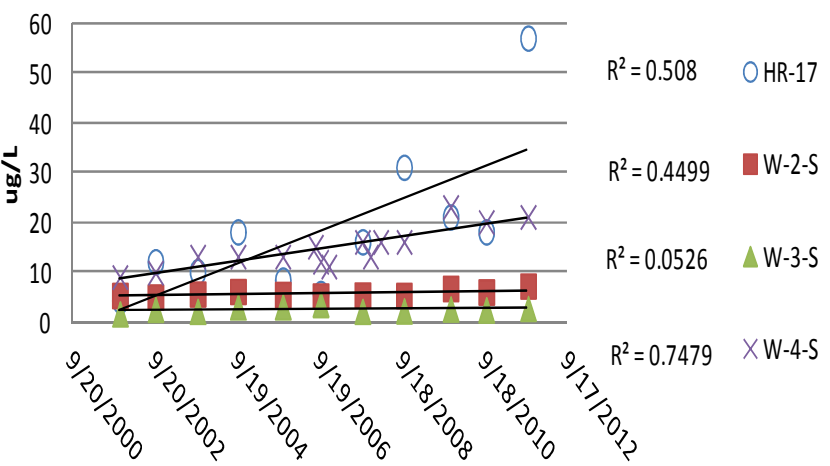

Vinyl chloride

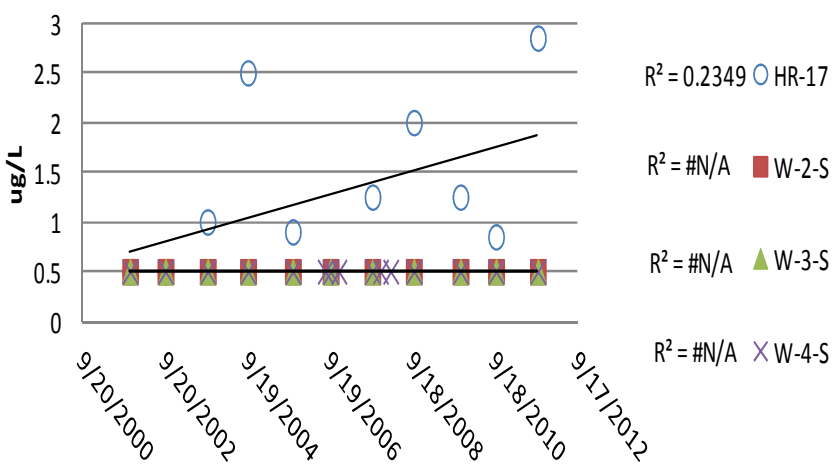

Note: $R^2 = \text{\#N/A}$ refers to a slope of zero


RACER Trust
MORAINE, OHIO
OH000294.2012

South Settling Lagoon
Linear Regression Graphs



North Settling Lagoon Statistical Analysis

Sen's Slope Estimator

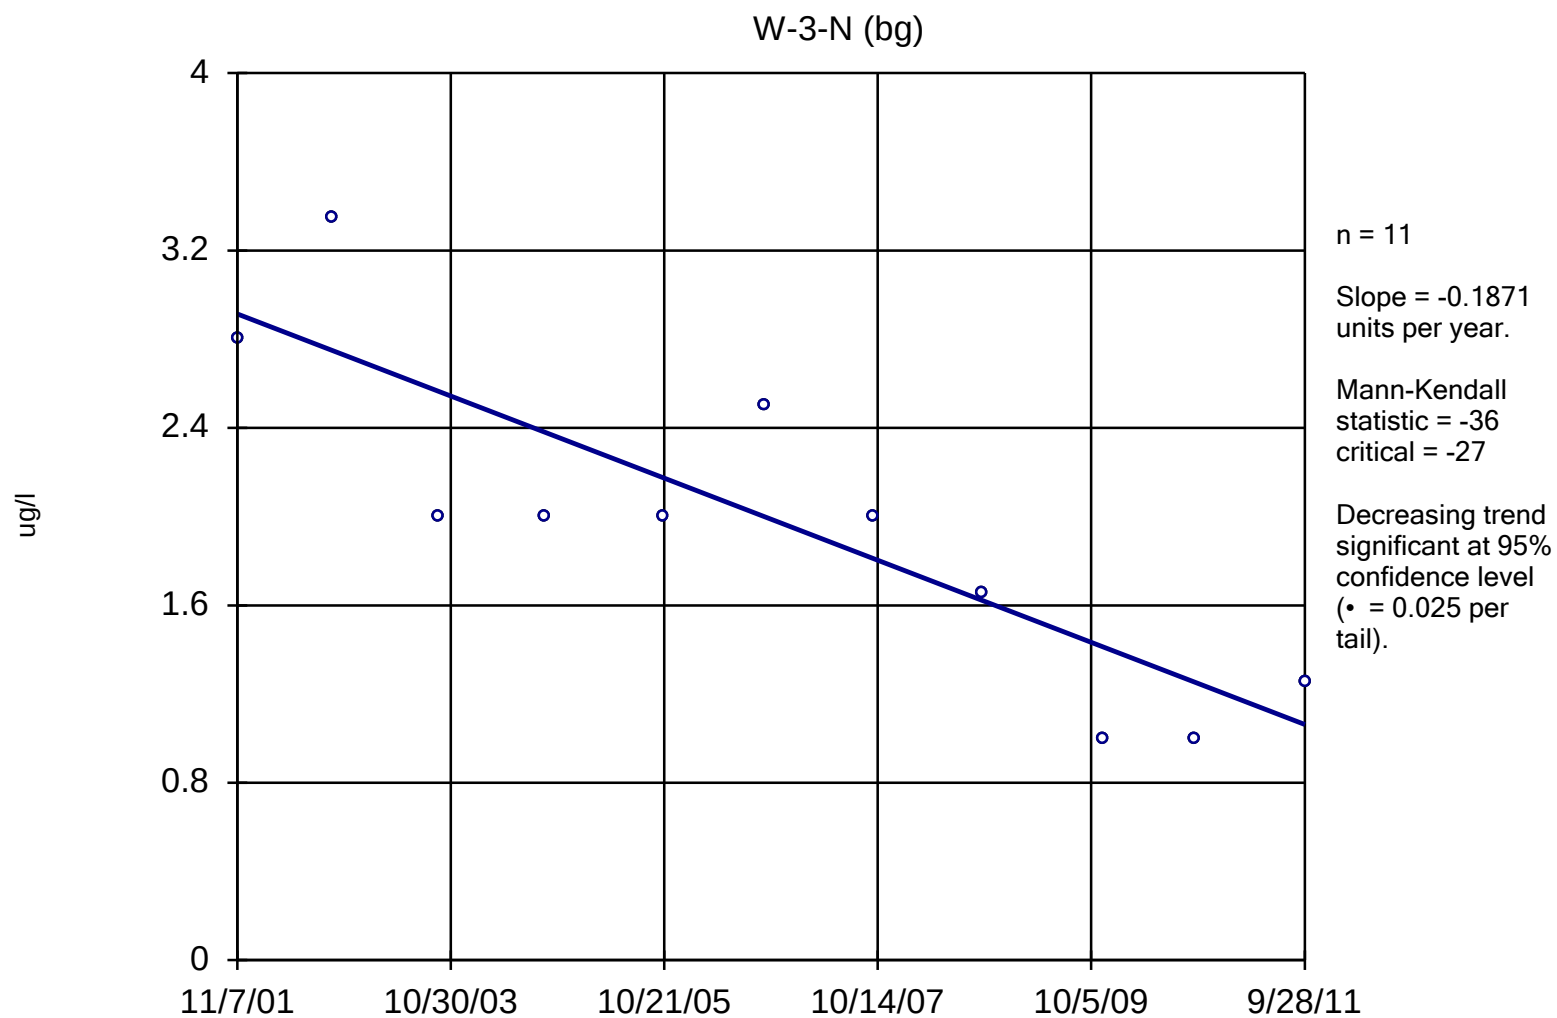


Constituent: 1,1,1-Trichloroethane Analysis Run 1/18/2012 8:09 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator


HR-04 (bg)

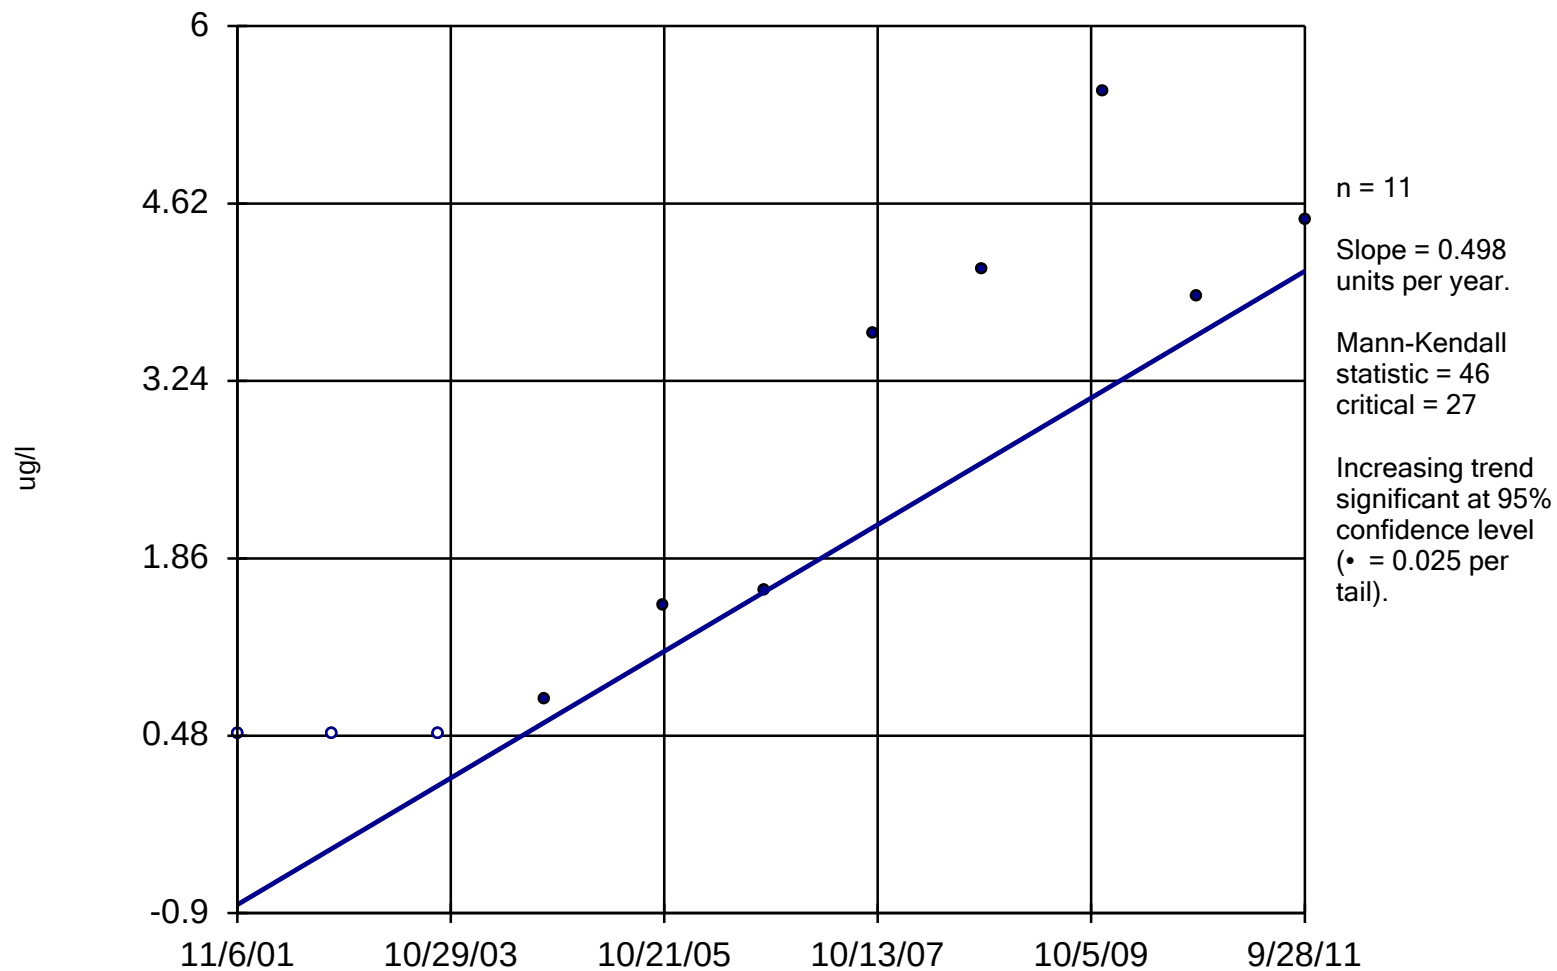

Constituent: 1,1-Dichloroethane Analysis Run 1/18/2012 8:09 AM


Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator

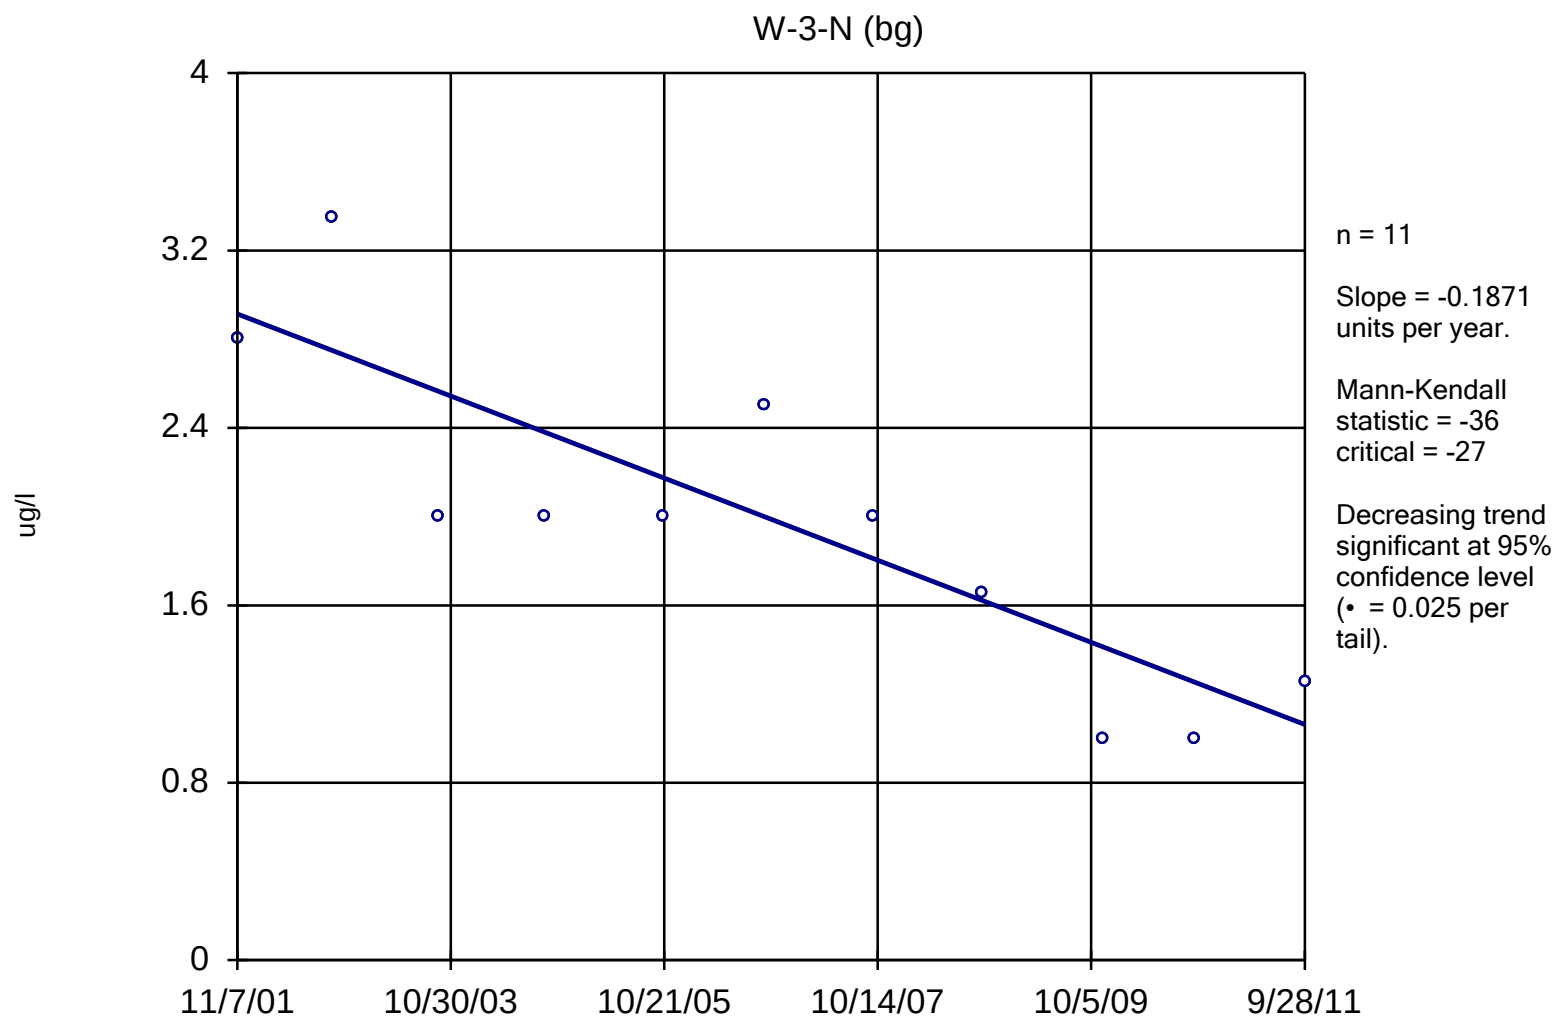

Constituent: 1,1-Dichloroethane Analysis Run 1/18/2012 8:09 AM


Facility: Client: ARCADIS G&M, Inc. Data File: Input North

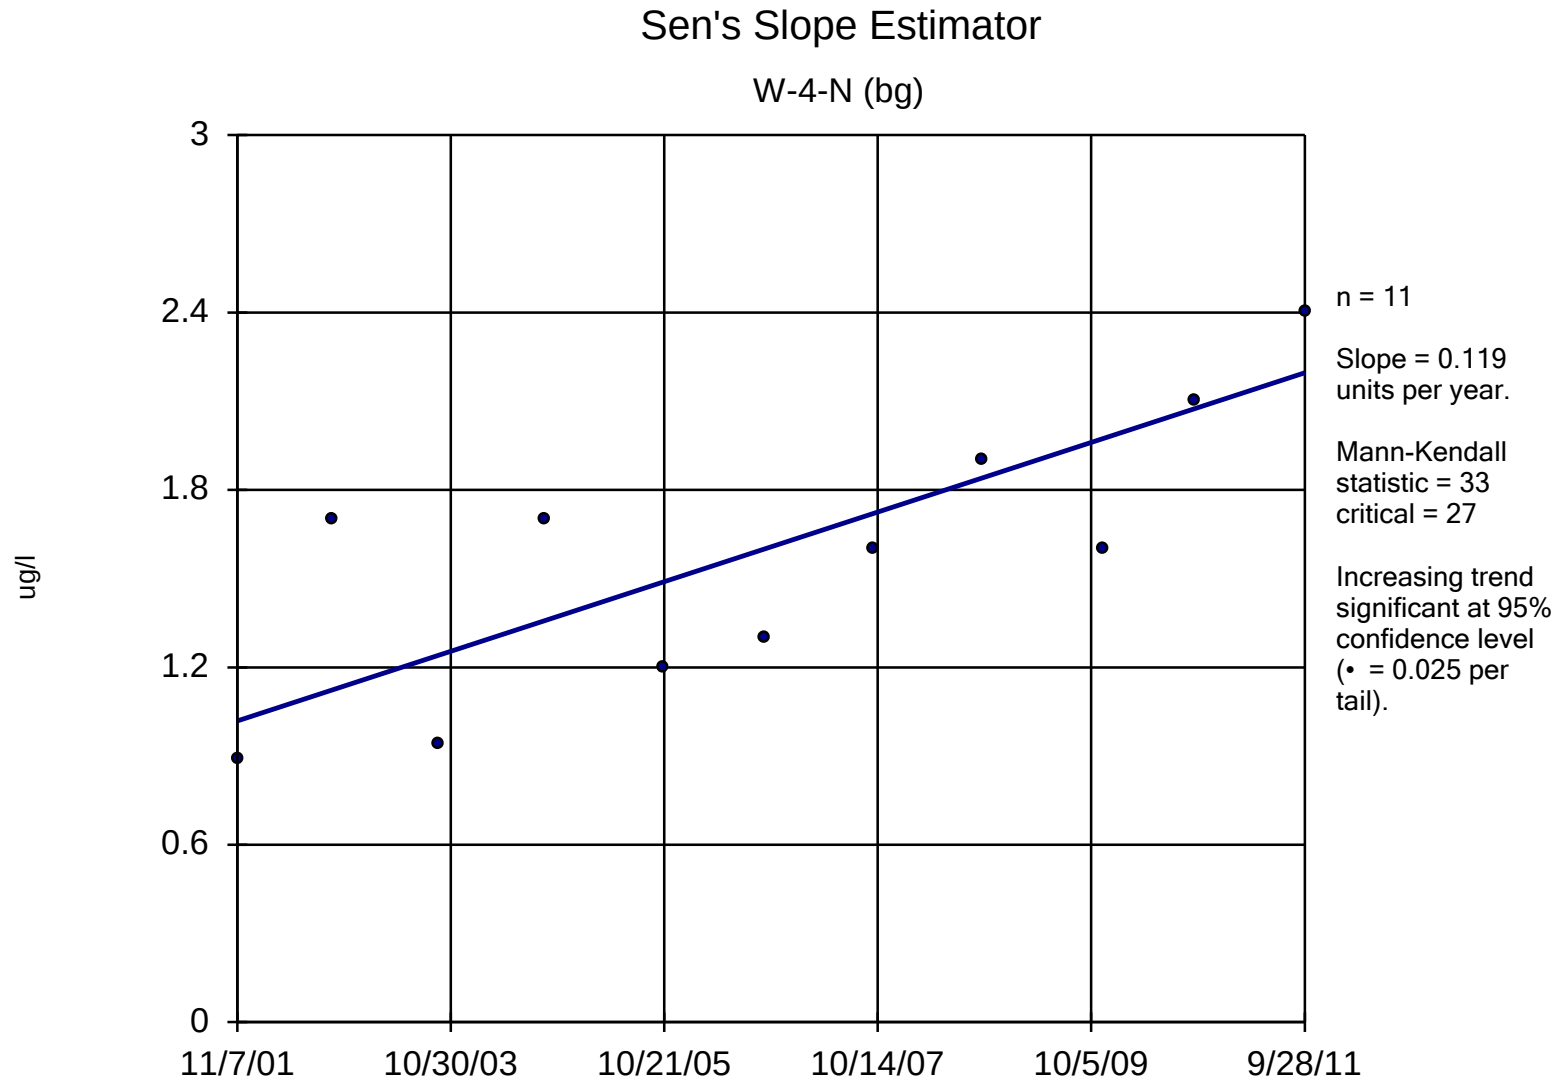

Constituent: 1,1-Dichloroethane Analysis Run 1/18/2012 8:09 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator

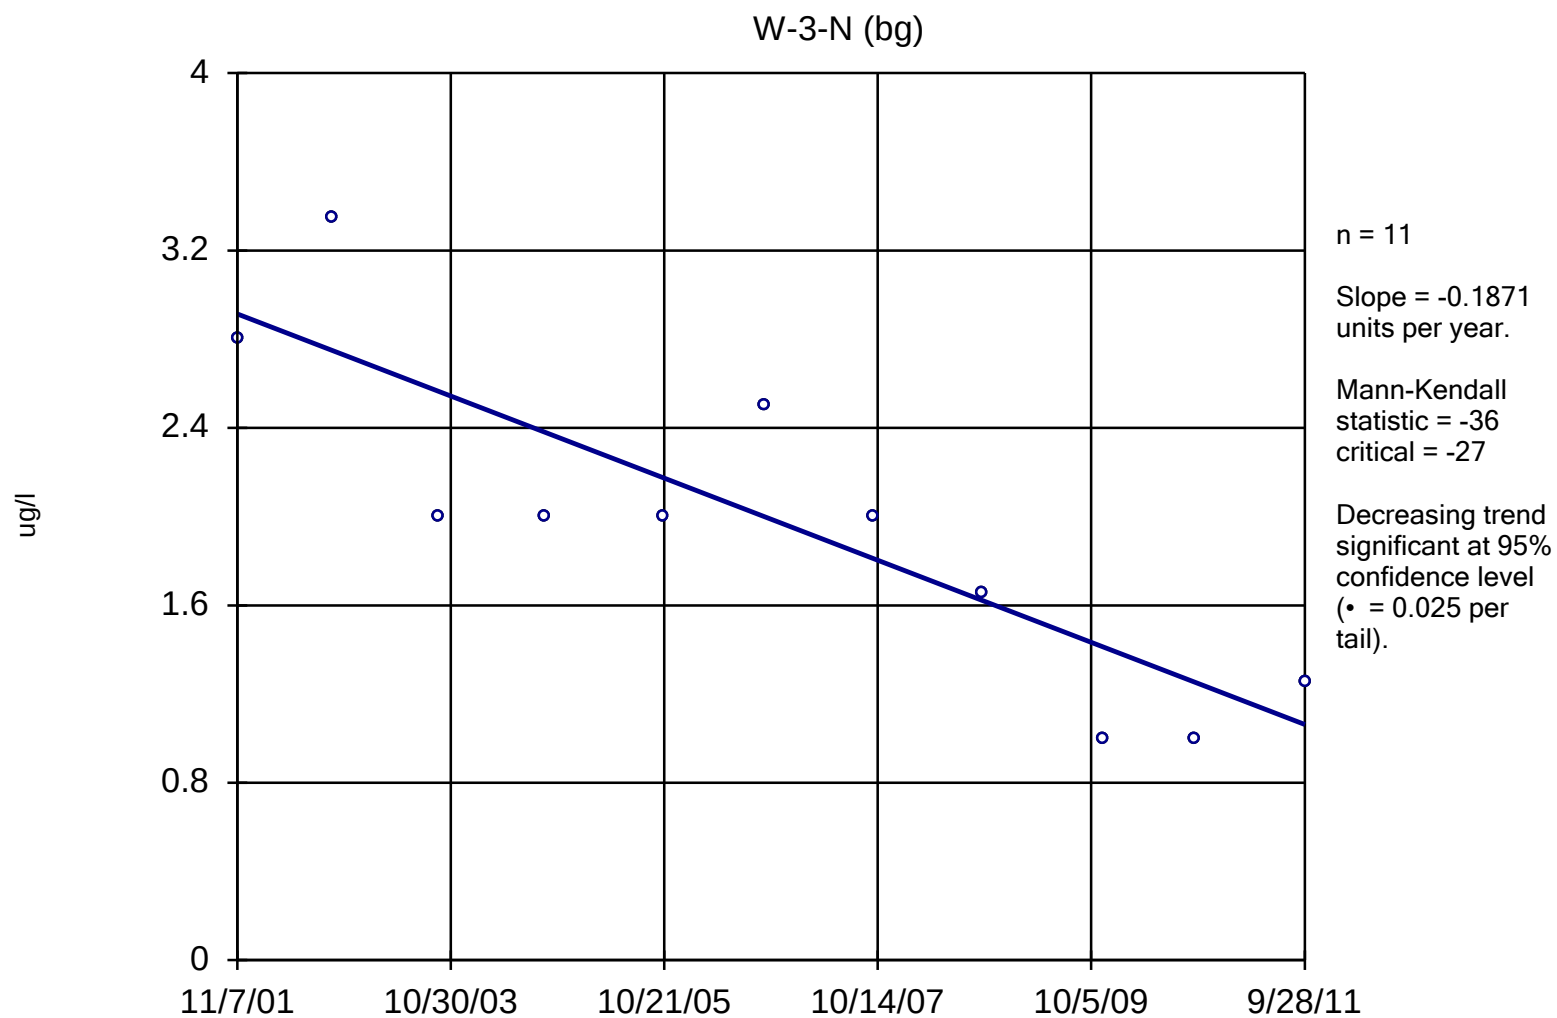


Constituent: 1,1-Dichloroethene Analysis Run 1/18/2012 8:10 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input North


Sen's Slope Estimator

W-3-N (bg)

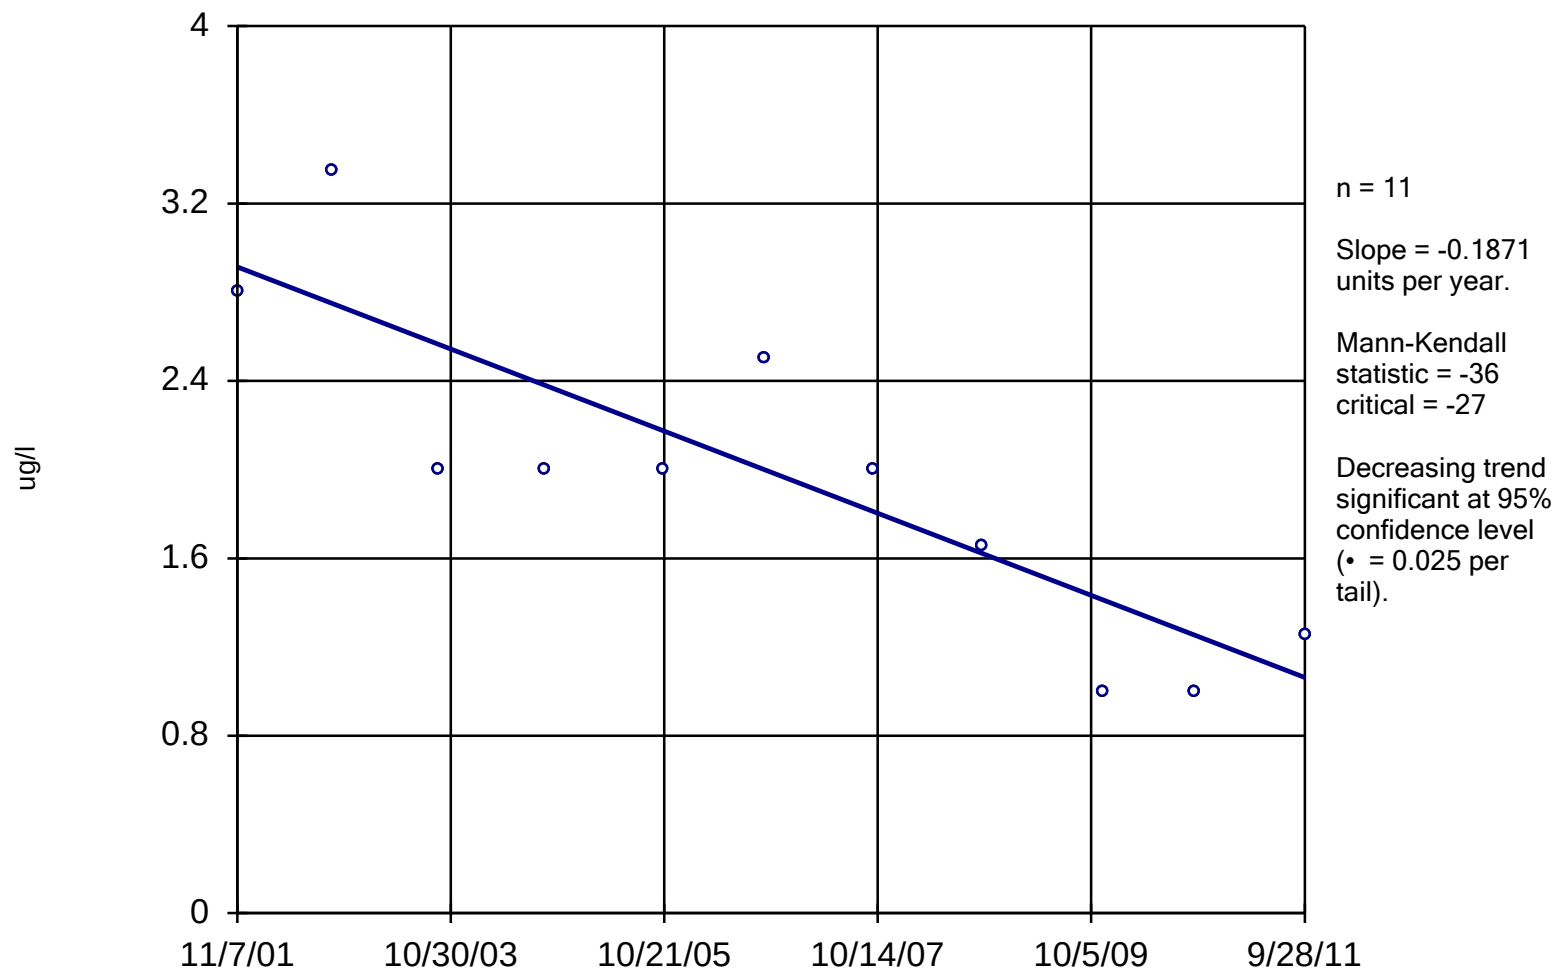


Constituent: Benzene Analysis Run 1/18/2012 8:10 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input North

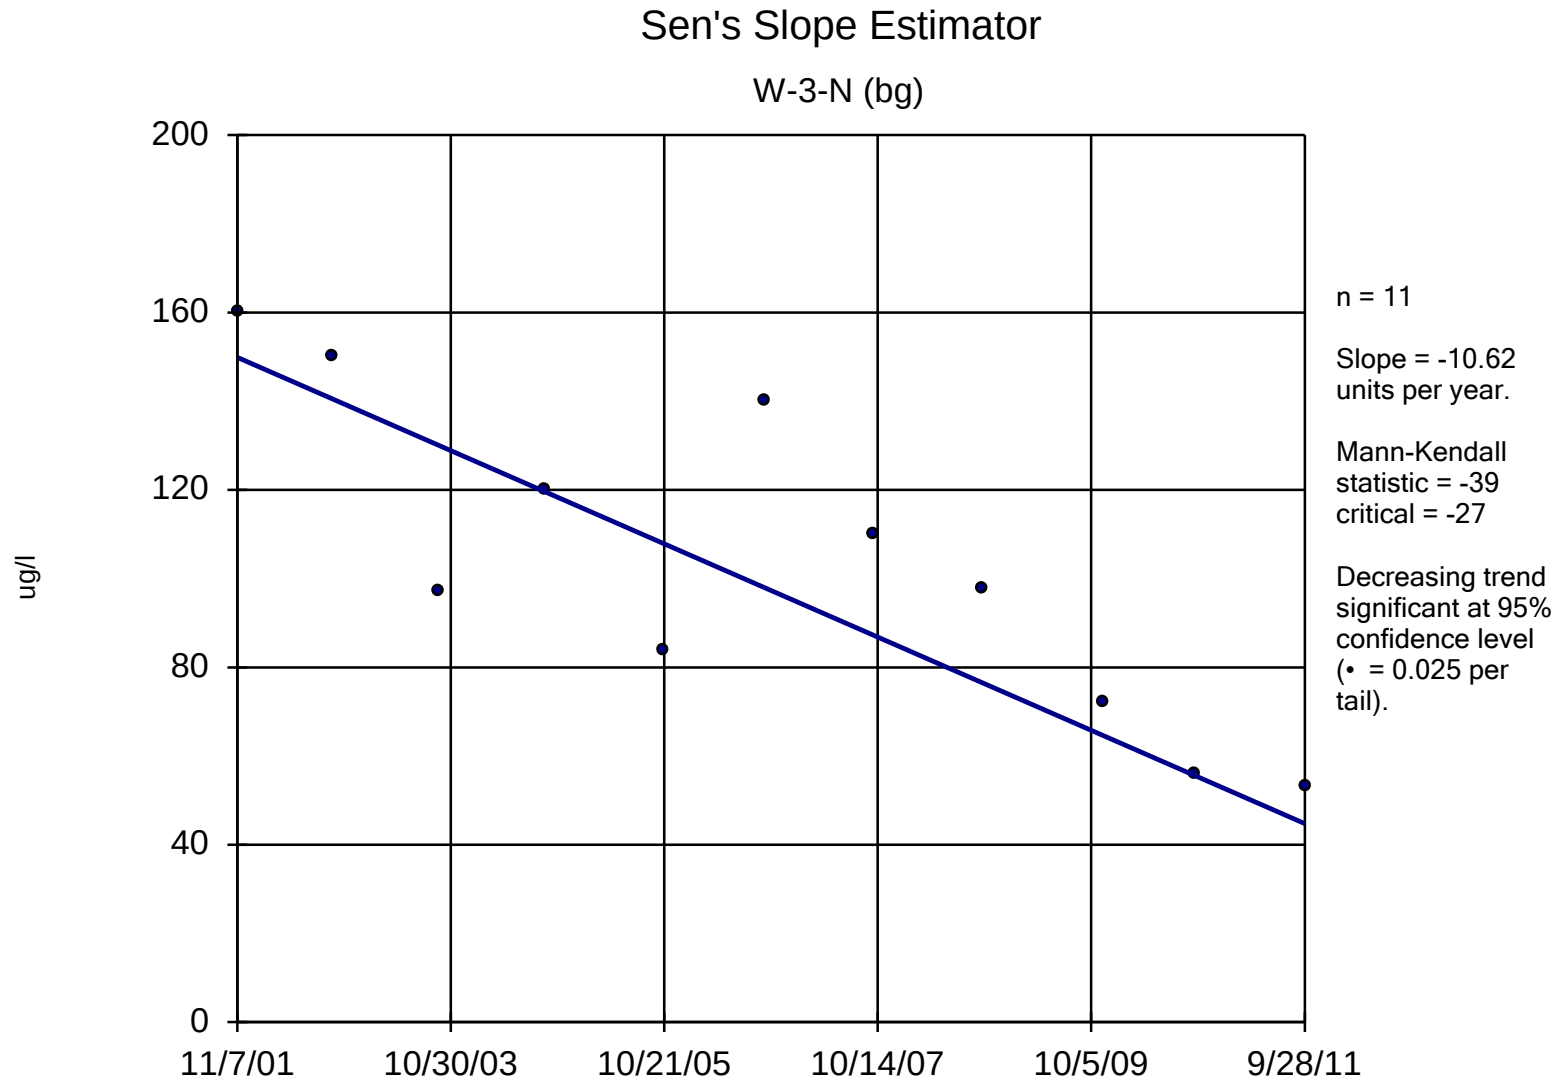

Constituent: cis-1,2-Dichloroethene Analysis Run 1/18/2012 8:10 AM


Facility: Client: ARCADIS G&M, Inc. Data File: Input North

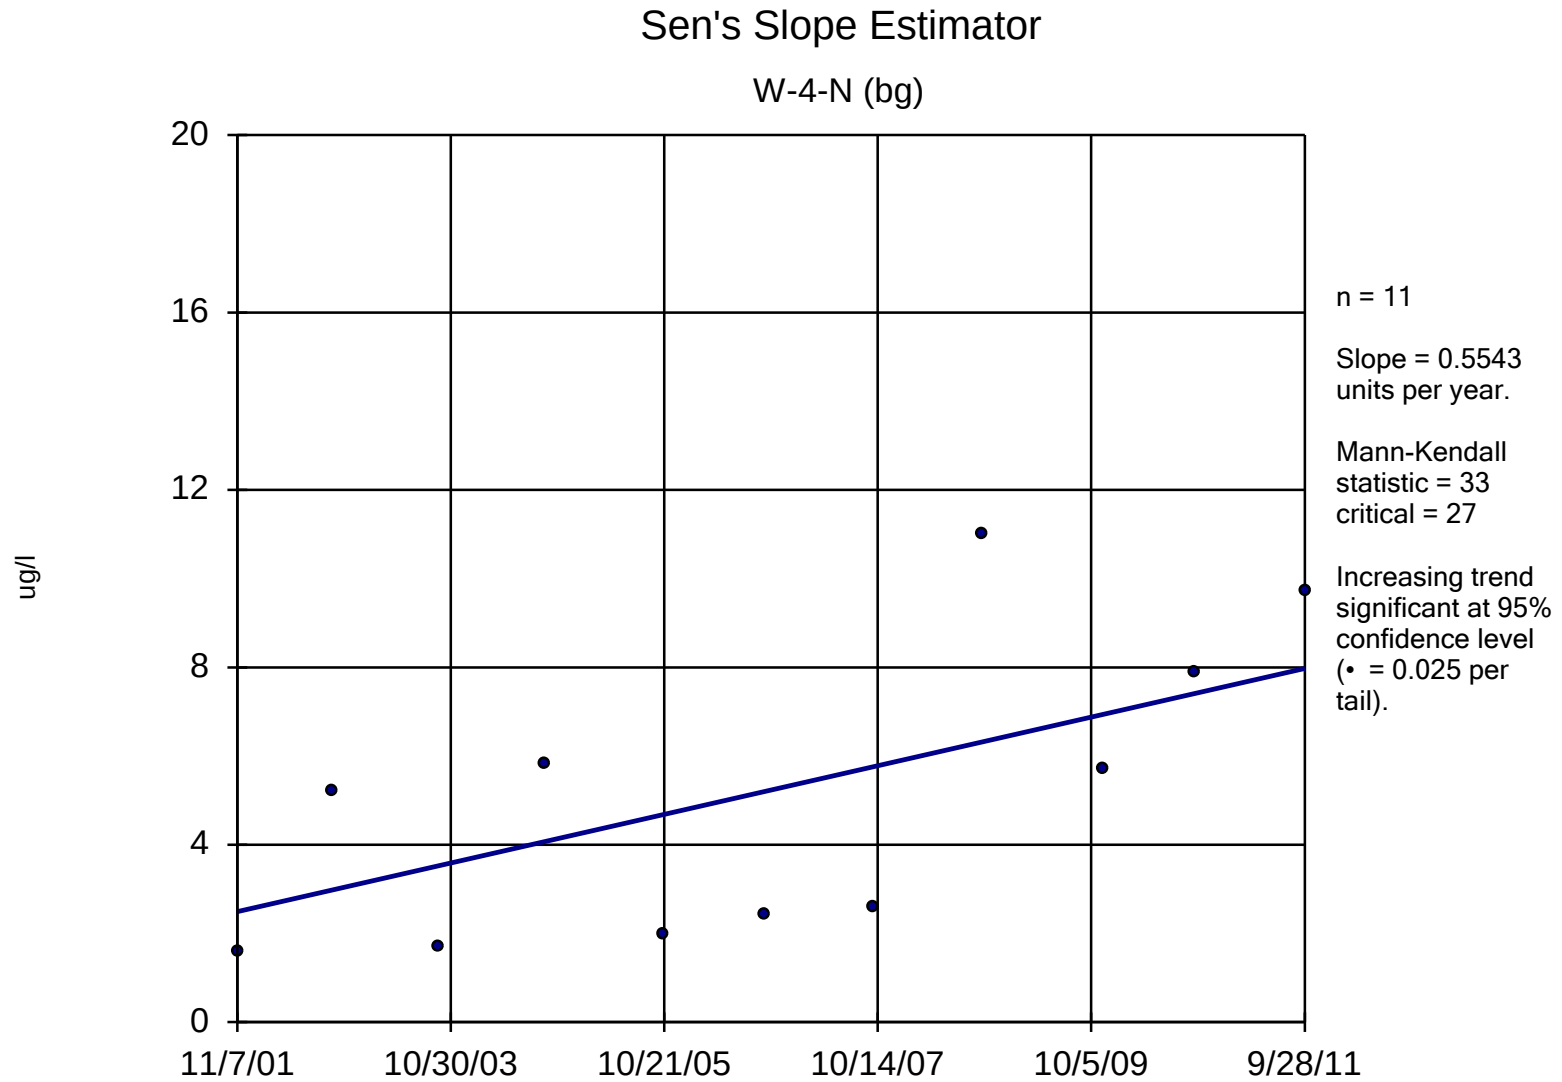

Constituent: cis-1,2-Dichloroethene Analysis Run 1/18/2012 8:10 AM


Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator

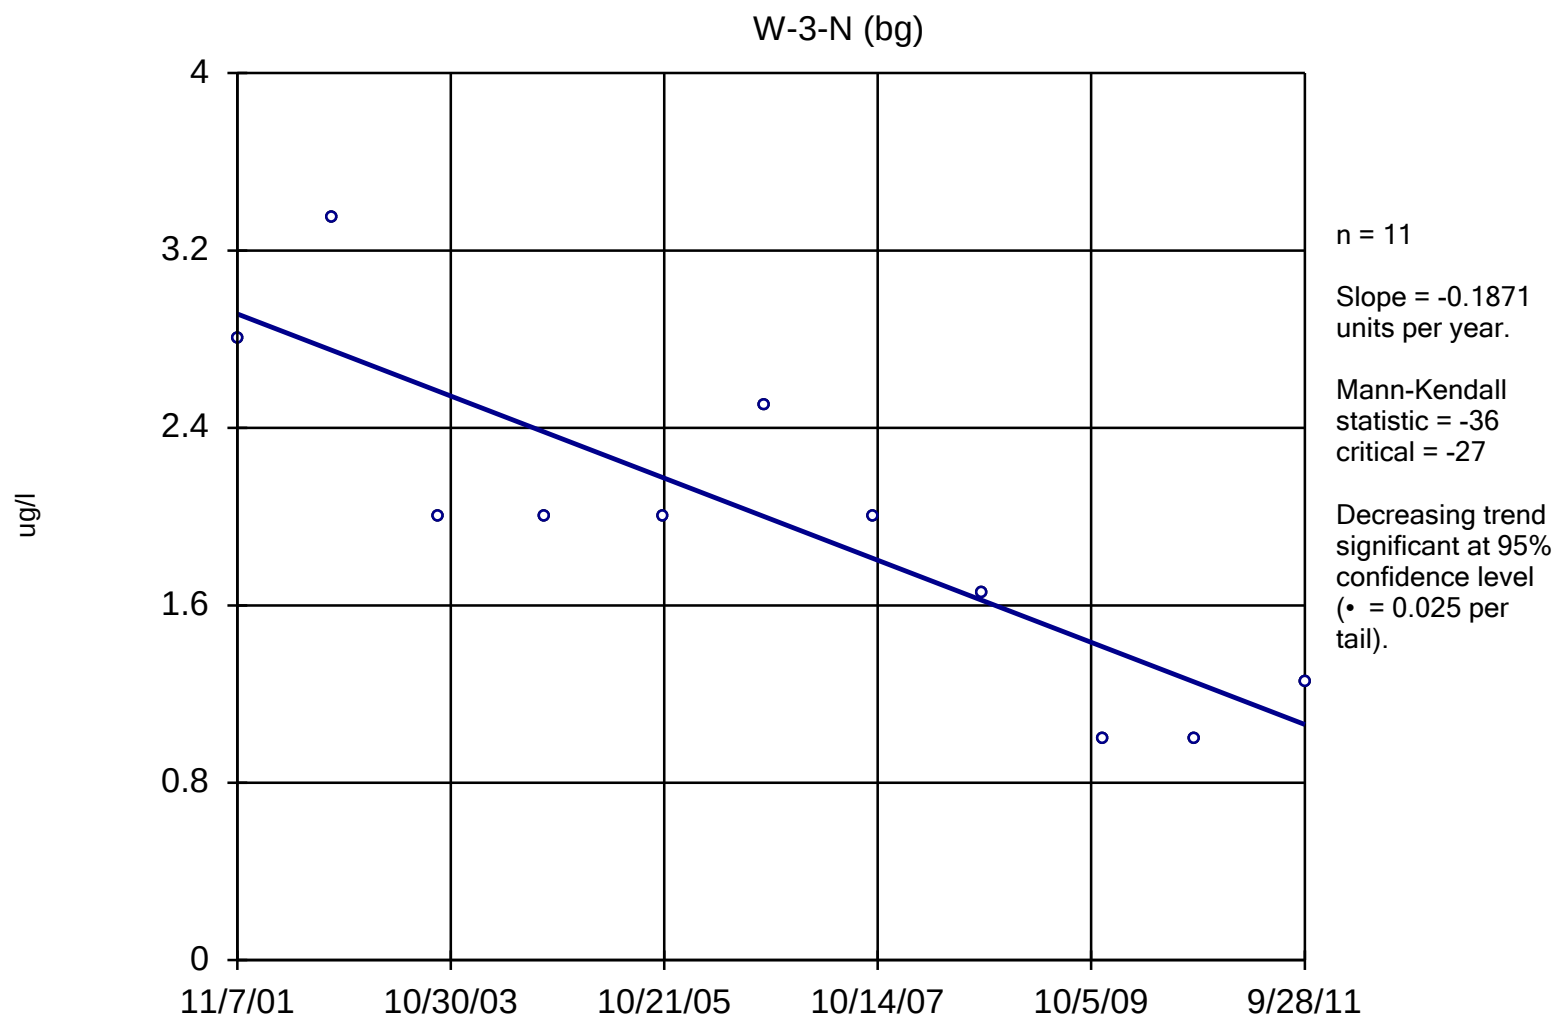

Constituent: Ethylbenzene Analysis Run 1/18/2012 8:10 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator

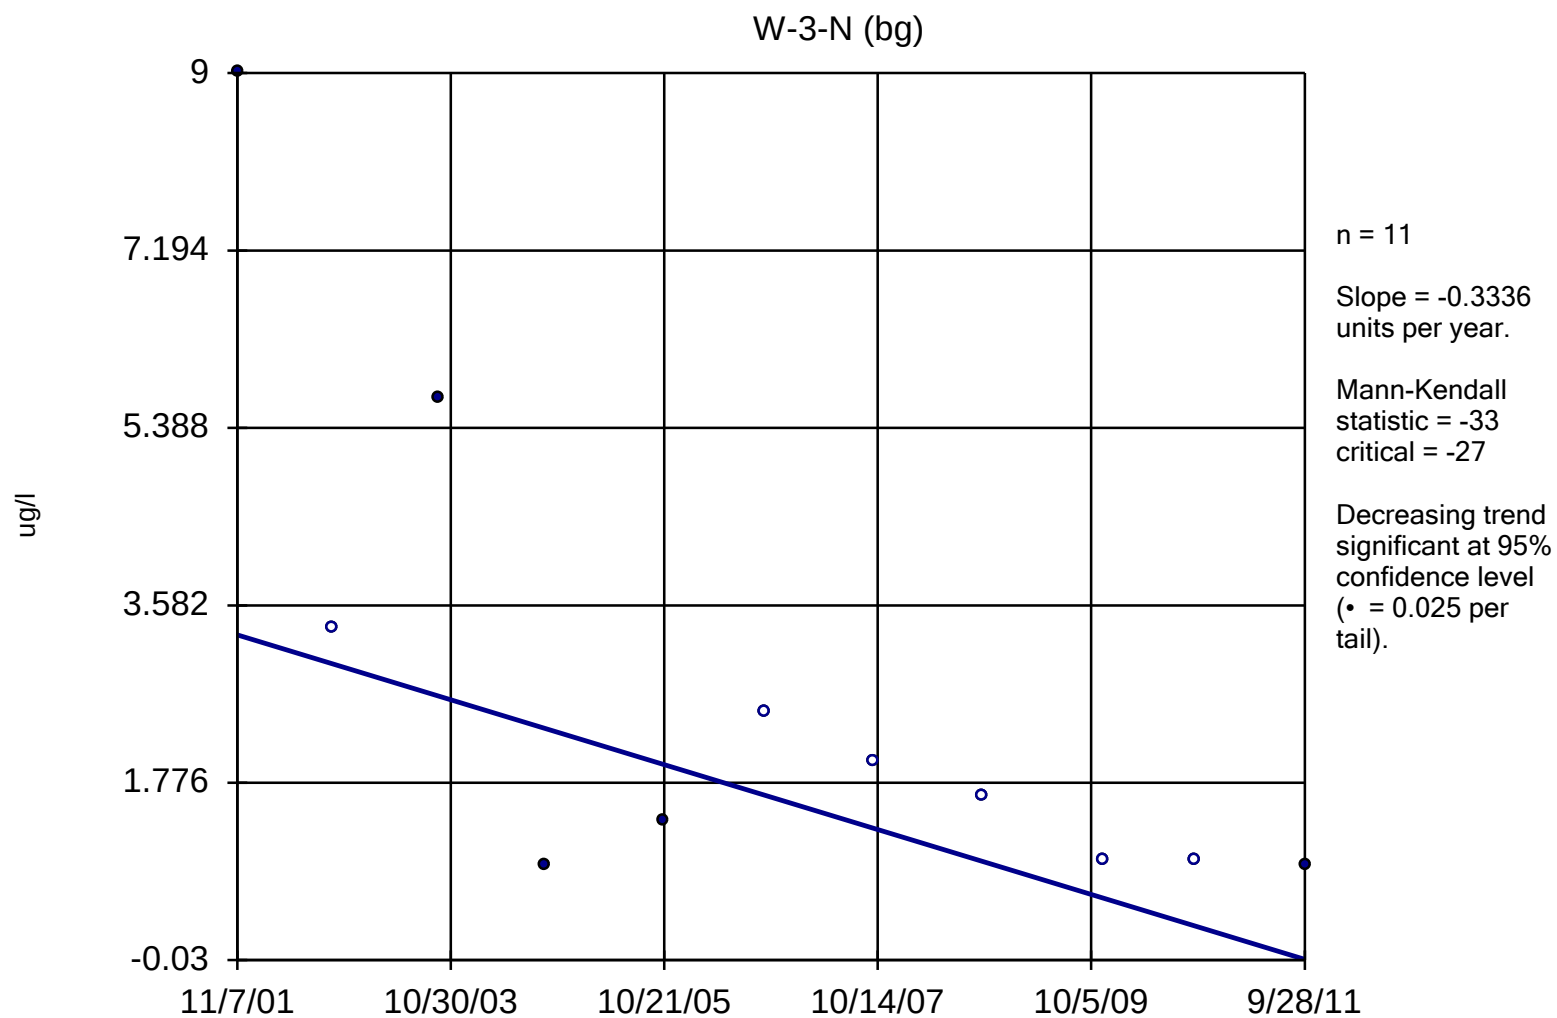


Constituent: Tetrachloroethene Analysis Run 1/18/2012 8:10 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator


W-3-N (bg)

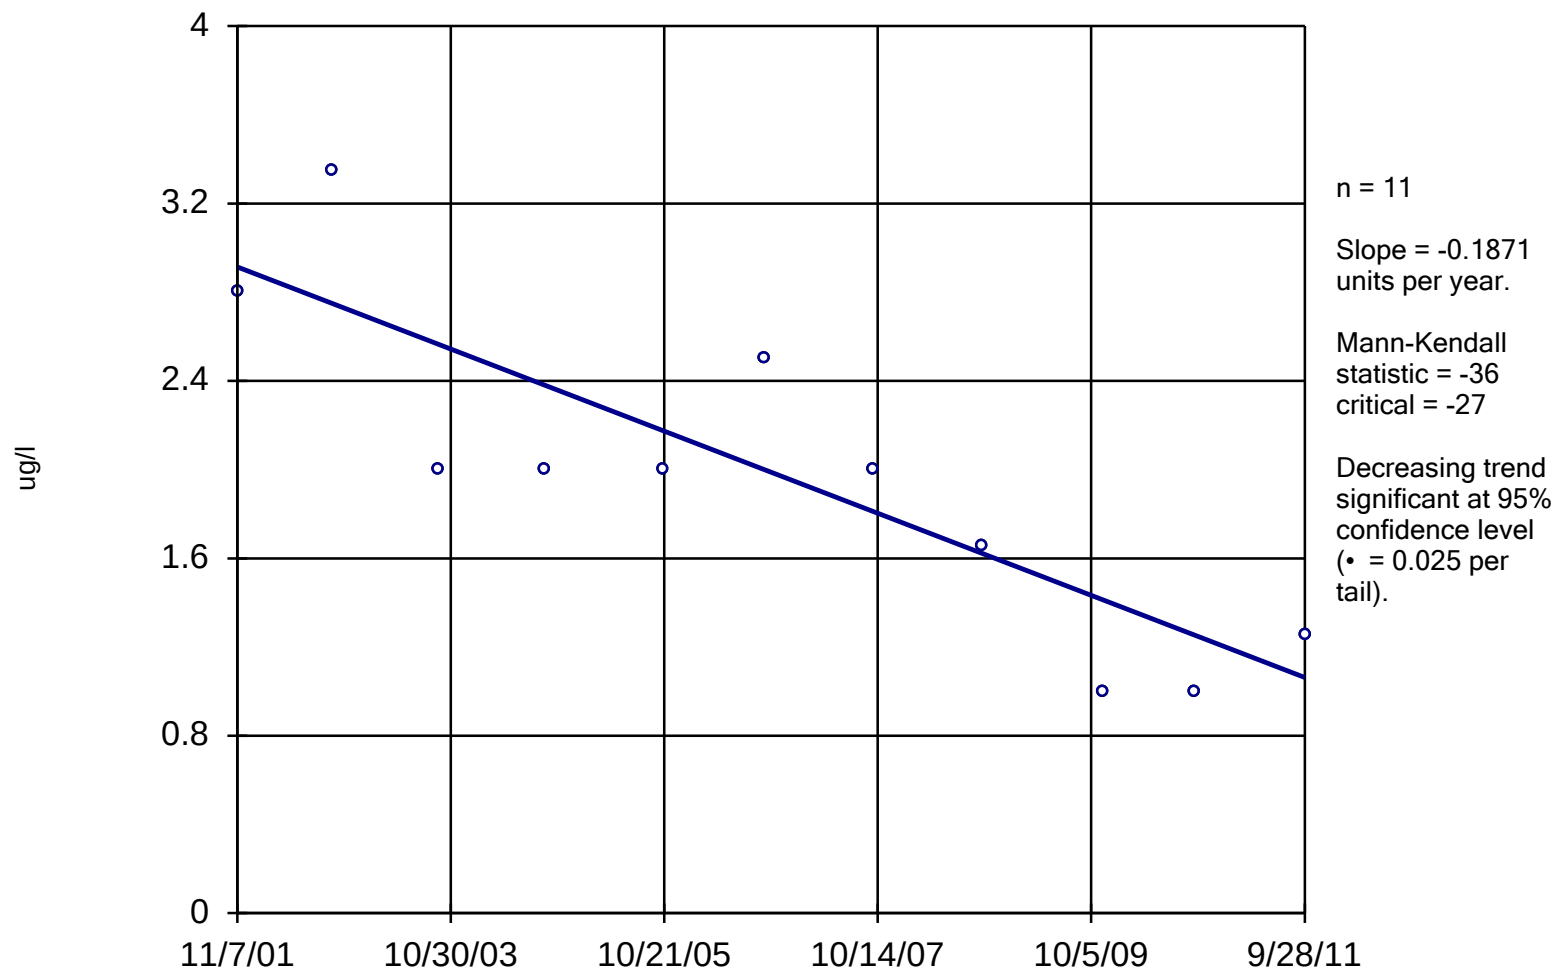

Constituent: Toluene Analysis Run 1/18/2012 8:10 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator

HR-04 (bg)

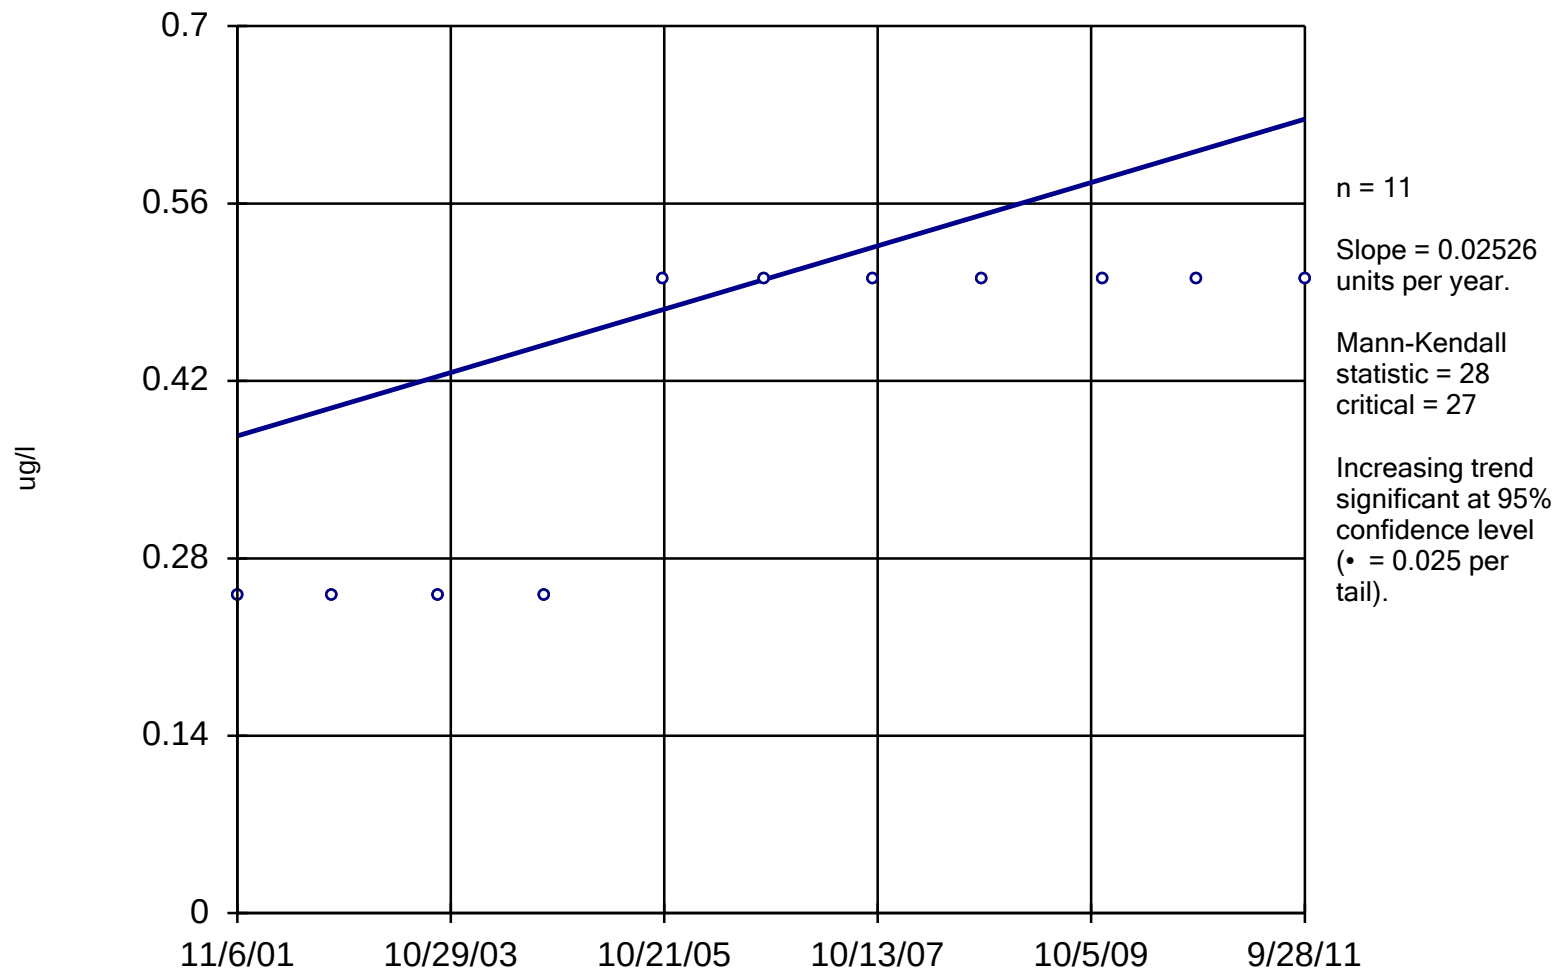


Constituent: trans-1,2-Dichloroethene Analysis Run 1/18/2012 8:10 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator

W-3-N (bg)

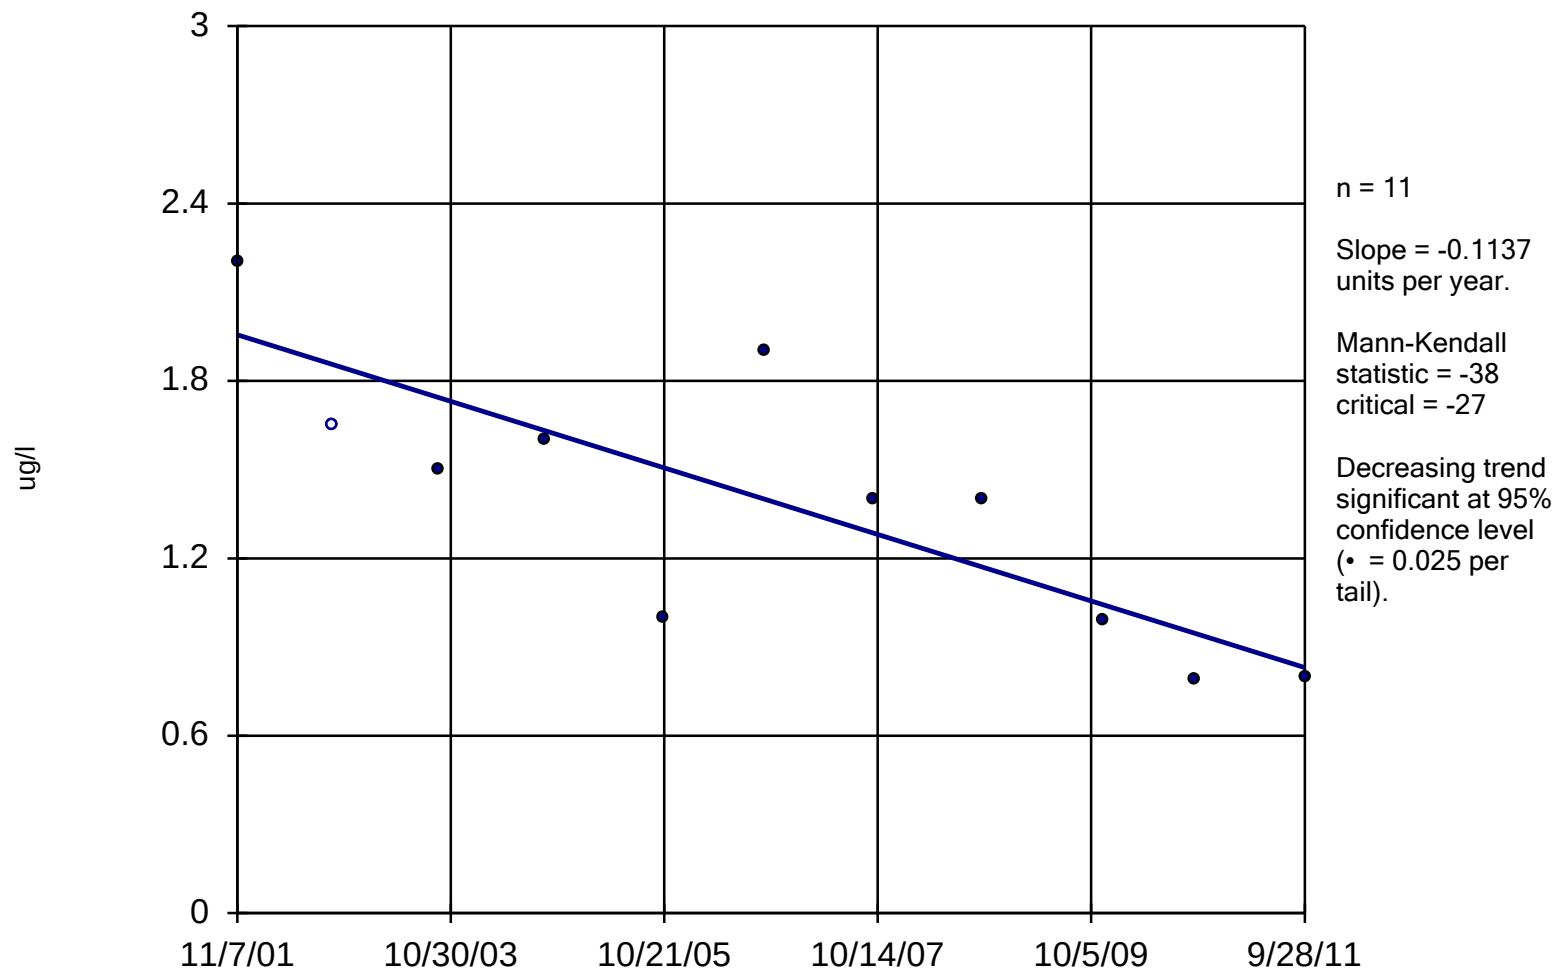


Constituent: trans-1,2-Dichloroethene Analysis Run 1/18/2012 8:10 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator


HR-04 (bg)

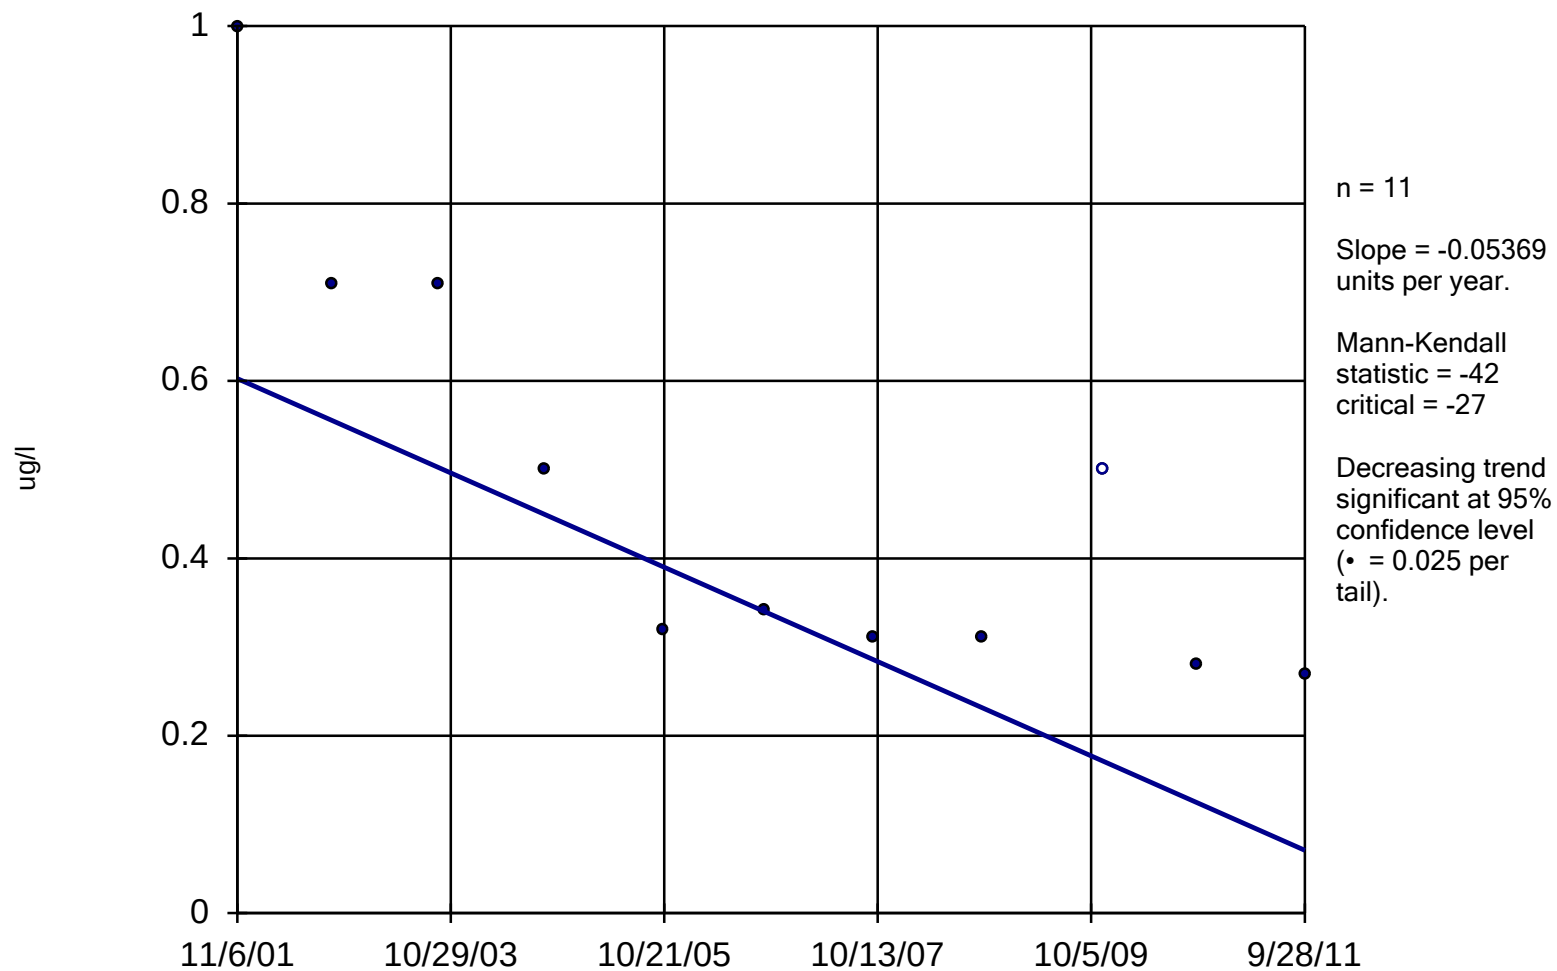

Constituent: Trichloroethene Analysis Run 1/18/2012 8:10 AM


Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator

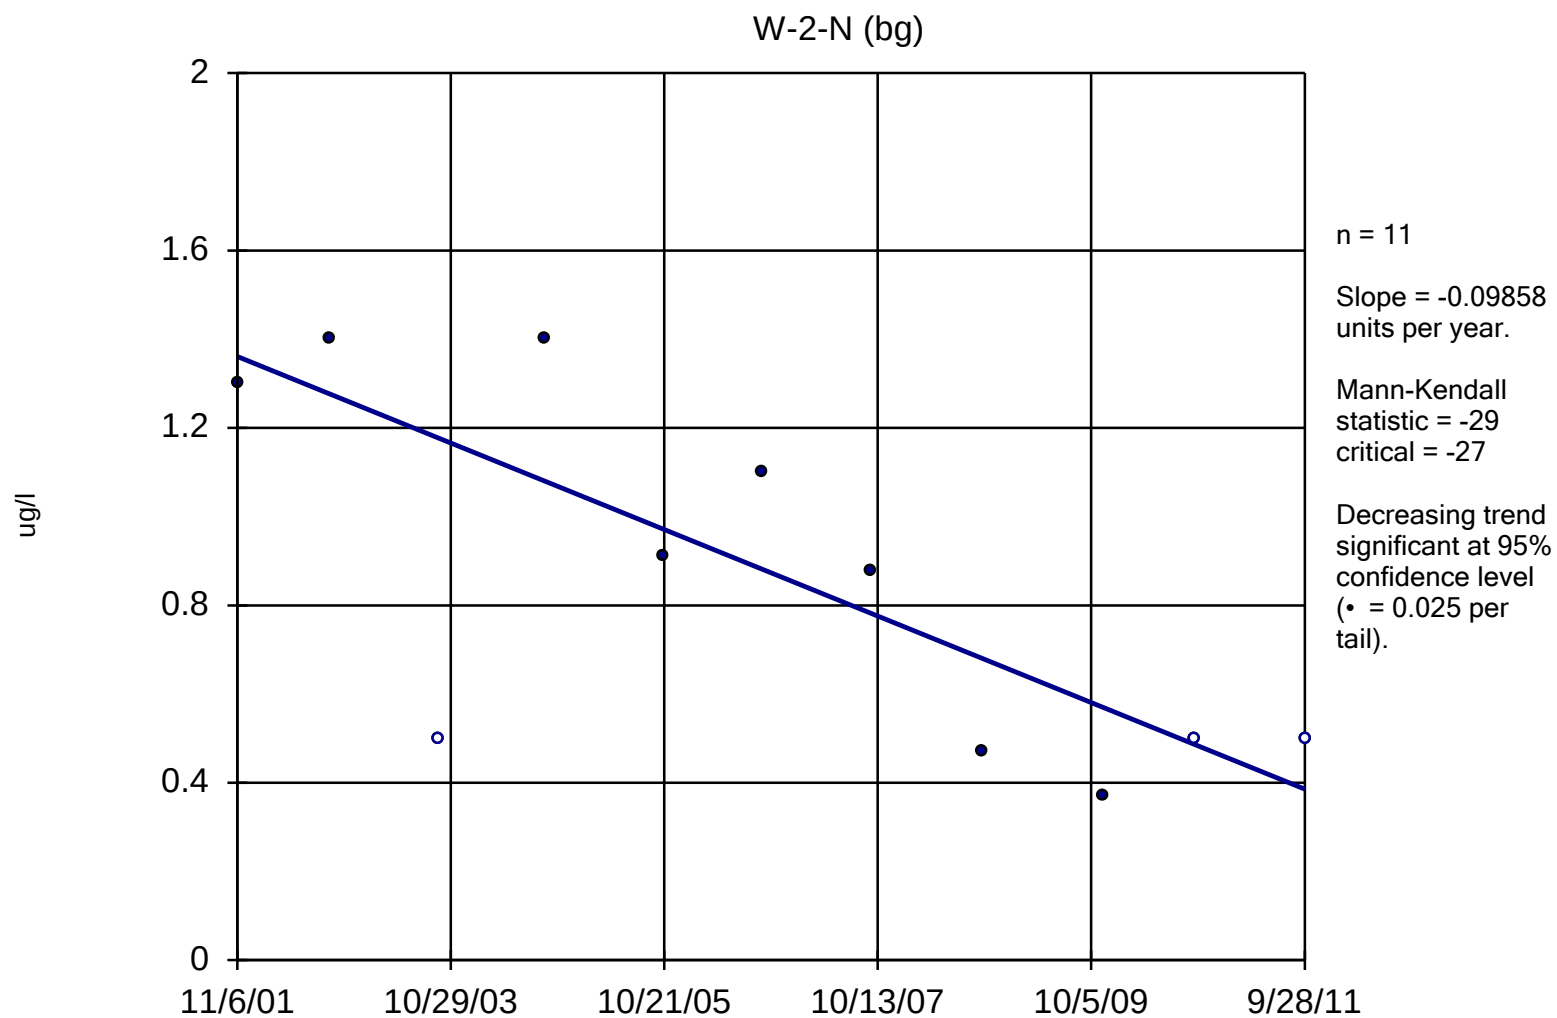


Constituent: Trichloroethene Analysis Run 1/18/2012 8:10 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator

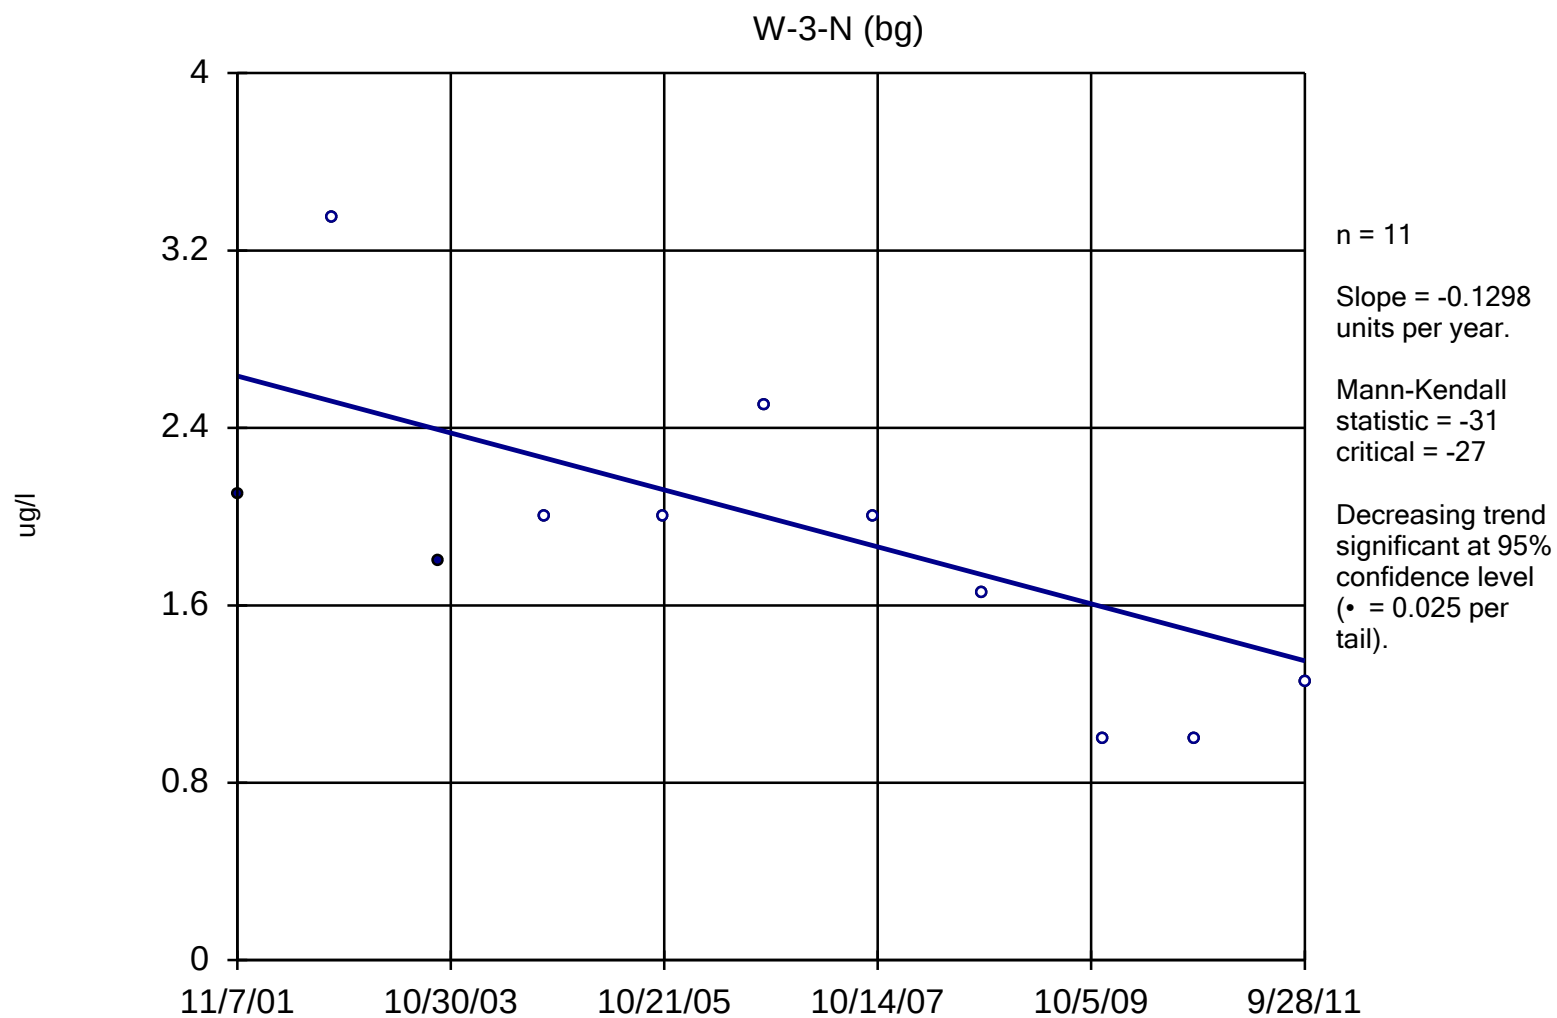


Constituent: Trichloroethene Analysis Run 1/18/2012 8:10 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input North

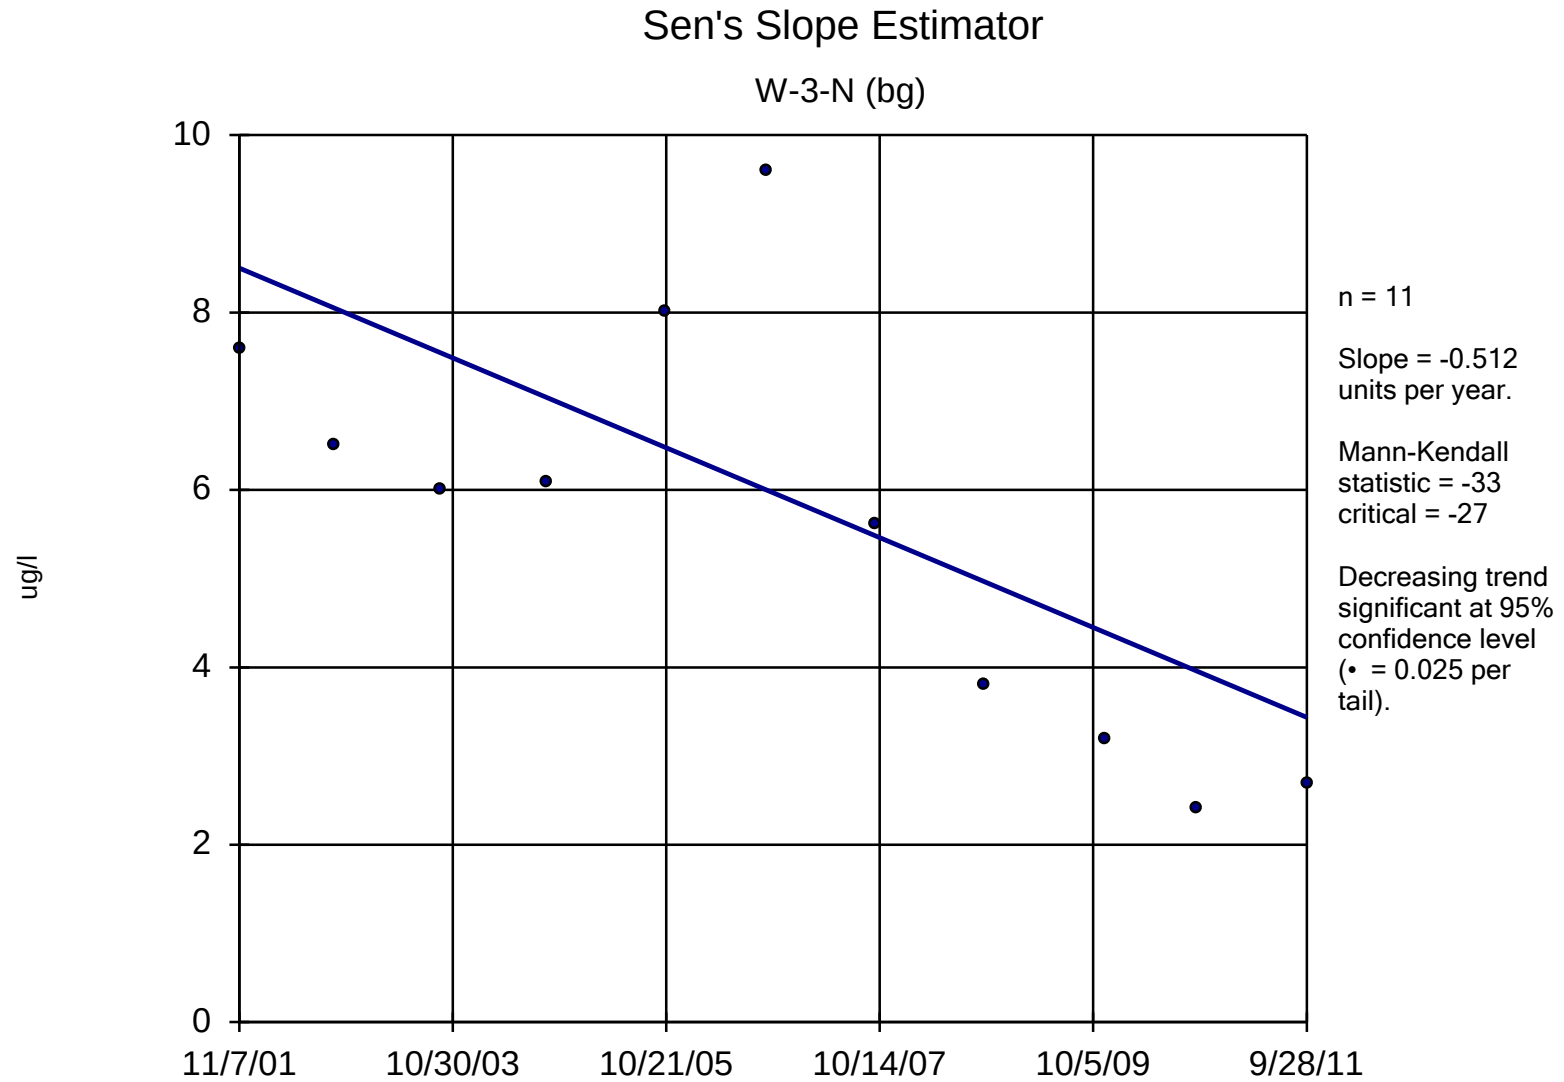

Constituent: Vinyl chloride Analysis Run 1/18/2012 8:10 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input North


Sen's Slope Estimator

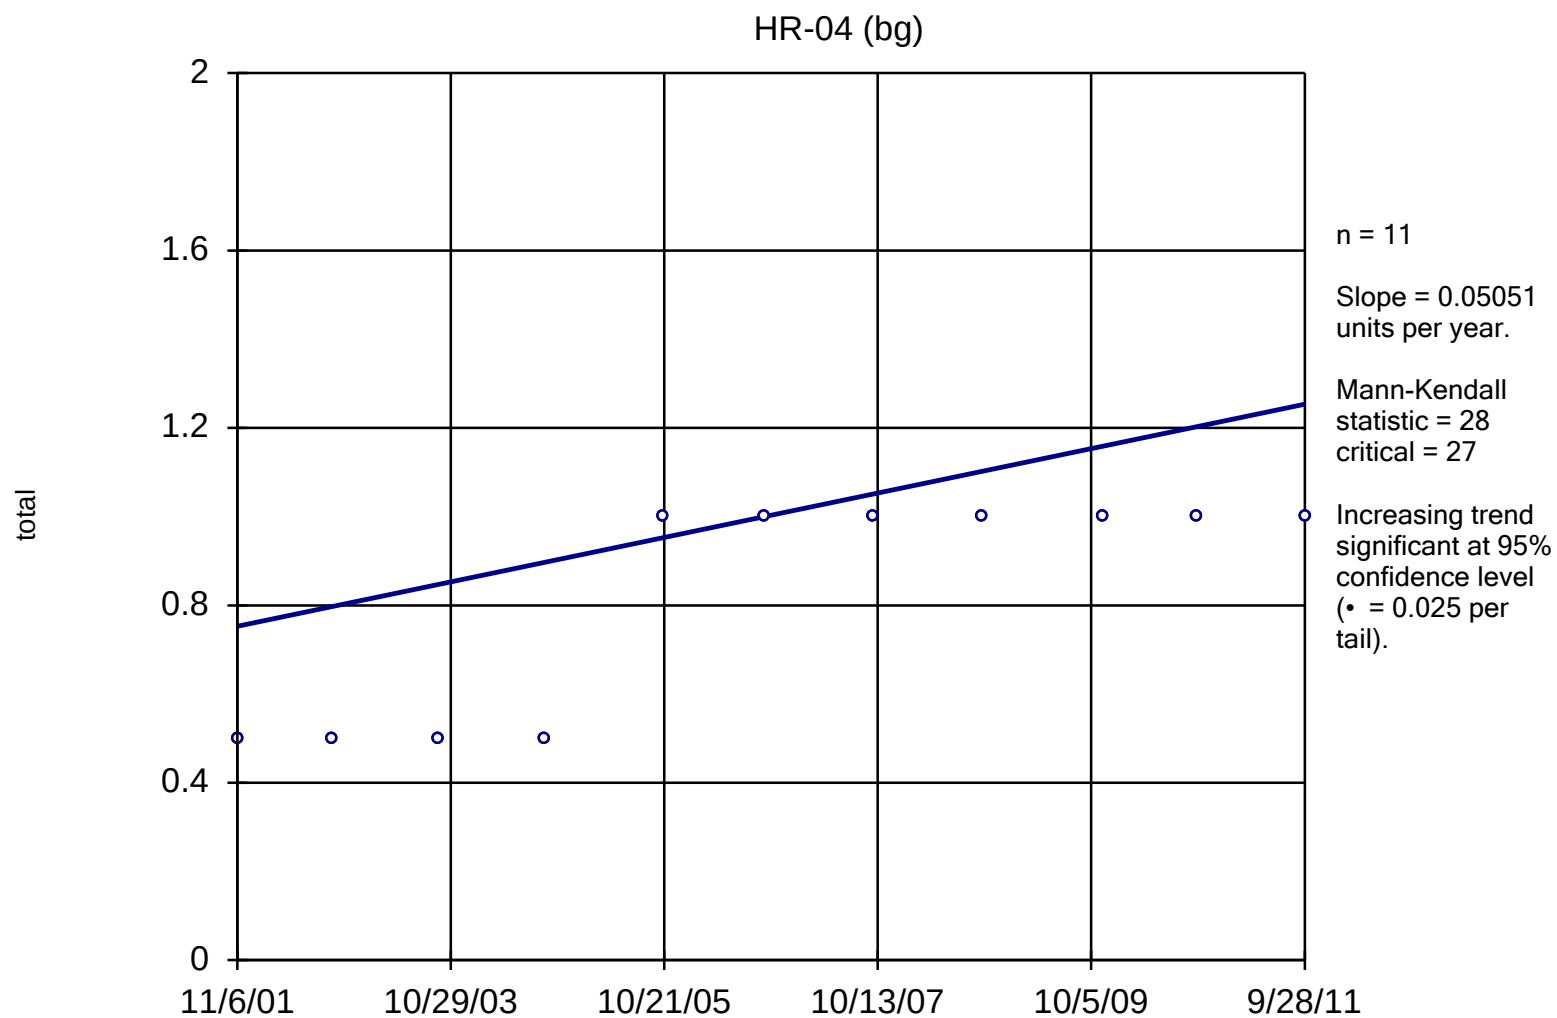

Constituent: Xylene Analysis Run 1/18/2012 8:10 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input North


Sen's Slope Estimator

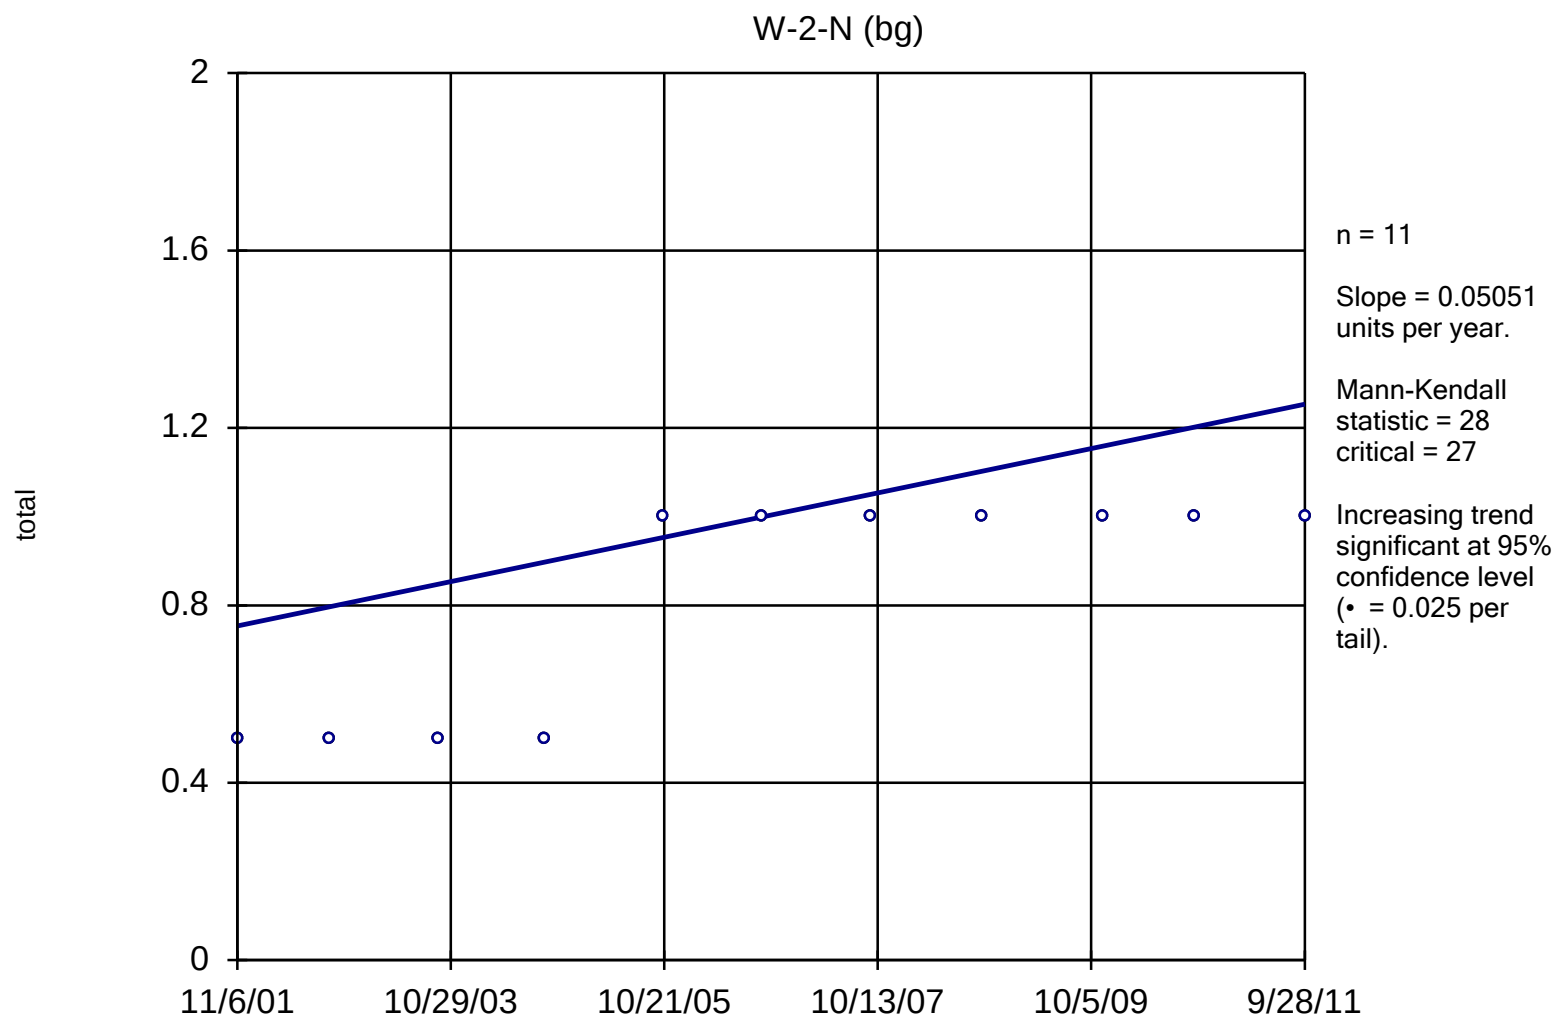

Constituent: Xylene Analysis Run 1/18/2012 8:10 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope Estimator

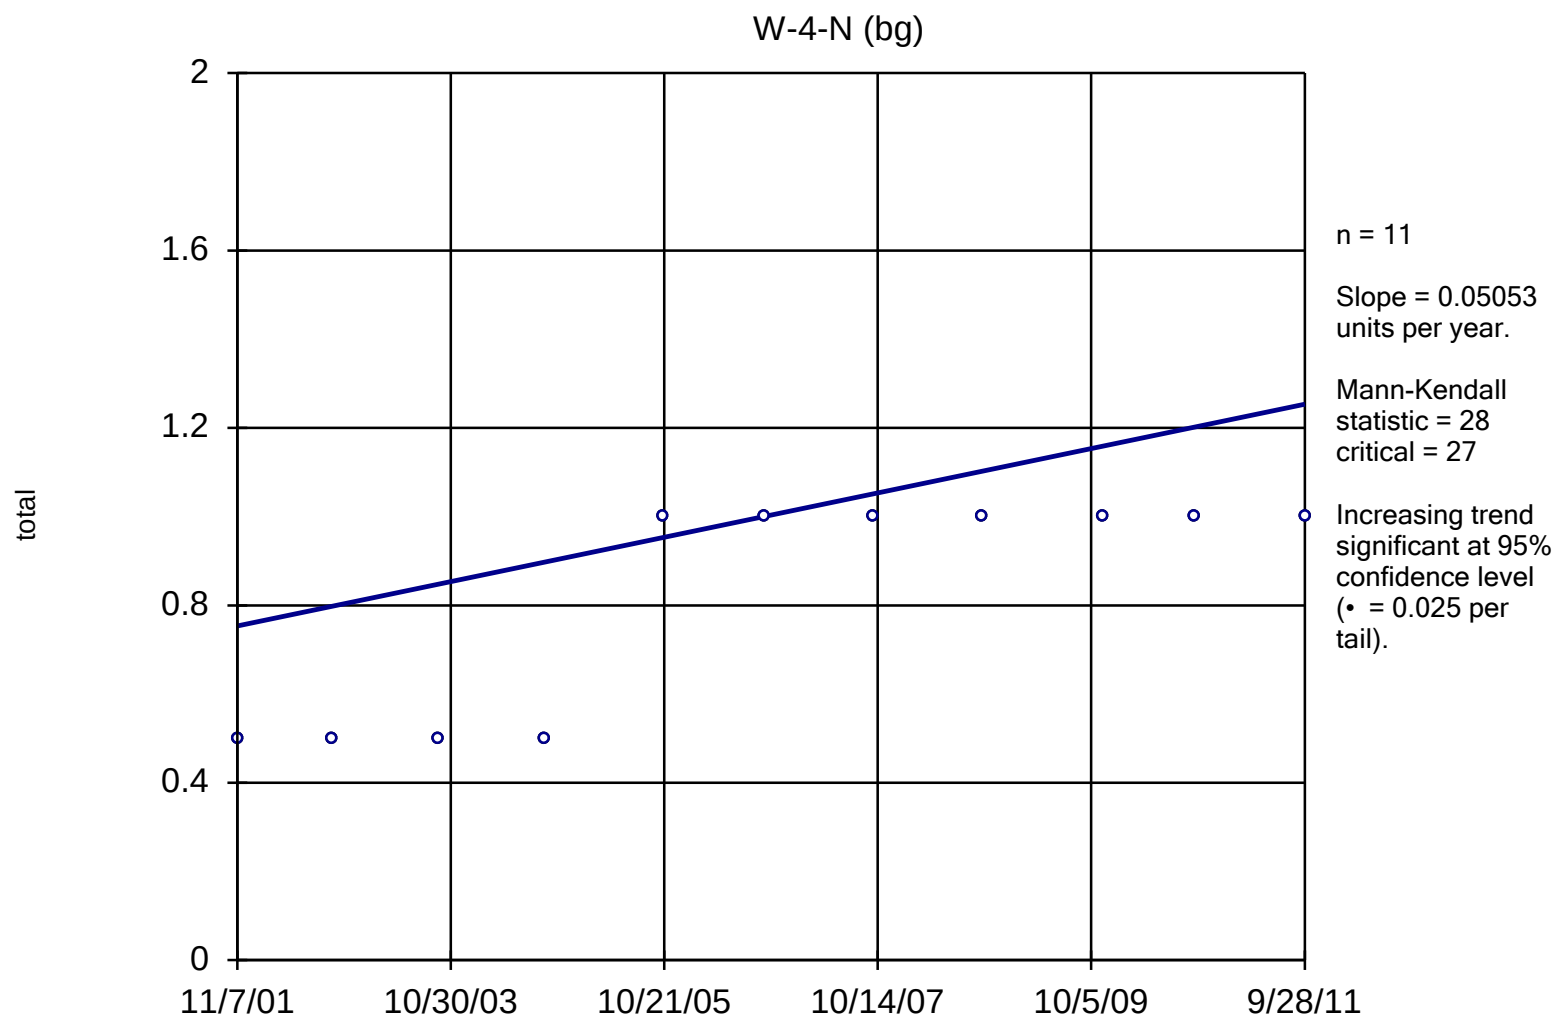


Constituent: Xylene Analysis Run 1/18/2012 8:10 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input North

Sen's Slope/Mann-Kendall


Facility: Client: ARCADIS G&M, Inc. Data File: Input North Printed 1/18/2012, 10:16 AM

<u>Constituent</u>	<u>Well</u>	<u>Slope</u>	<u>Mann-K.</u>	<u>Critical</u>	<u>Sig.</u>	<u>N</u>	<u>Alpha</u>
1,1,1-Trichloroethane (ug/l)	HR-04 (bg)	0	10	27	No	11	0.05
1,1,1-Trichloroethane (ug/l)	W-2-N (bg)	0	11	27	No	11	0.05
1,1,1-Trichloroethane (ug/l)	W-3-N (bg)	-0.1871	-36	-27	Yes	11	0.05
1,1,1-Trichloroethane (ug/l)	W-4-N (bg)	0.01356	18	27	No	11	0.05
1,1-Dichloroethane (ug/l)	HR-04 (bg)	0.498	46	27	Yes	11	0.05
1,1-Dichloroethane (ug/l)	W-2-N (bg)	0.01048	11	27	No	11	0.05
1,1-Dichloroethane (ug/l)	W-3-N (bg)	-0.1871	-36	-27	Yes	11	0.05
1,1-Dichloroethane (ug/l)	W-4-N (bg)	0.119	33	27	Yes	11	0.05
1,1-Dichloroethene (ug/l)	HR-04 (bg)	0	0	27	No	11	0.05
1,1-Dichloroethene (ug/l)	W-2-N (bg)	0	0	27	No	11	0.05
1,1-Dichloroethene (ug/l)	W-3-N (bg)	-0.1871	-36	-27	Yes	11	0.05
1,1-Dichloroethene (ug/l)	W-4-N (bg)	0	0	27	No	11	0.05
Benzene (ug/l)	HR-04 (bg)	0	0	27	No	11	0.05
Benzene (ug/l)	W-2-N (bg)	0	0	27	No	11	0.05
Benzene (ug/l)	W-3-N (bg)	-0.1871	-36	-27	Yes	11	0.05
Benzene (ug/l)	W-4-N (bg)	0	0	27	No	11	0.05
cis-1,2-Dichloroethene (ug/l)	HR-04 (bg)	0.004939	18	27	No	11	0.05
cis-1,2-Dichloroethene (ug/l)	W-2-N (bg)	0.01424	8	27	No	11	0.05
cis-1,2-Dichloroethene (ug/l)	W-3-N (bg)	-10.62	-39	-27	Yes	11	0.05
cis-1,2-Dichloroethene (ug/l)	W-4-N (bg)	0.5543	33	27	Yes	11	0.05
Ethylbenzene (ug/l)	HR-04 (bg)	0	0	27	No	11	0.05
Ethylbenzene (ug/l)	W-2-N (bg)	0	0	27	No	11	0.05
Ethylbenzene (ug/l)	W-3-N (bg)	-0.1871	-36	-27	Yes	11	0.05
Ethylbenzene (ug/l)	W-4-N (bg)	0	0	27	No	11	0.05
Tetrachloroethene (ug/l)	HR-04 (bg)	-0.03122	-25	-27	No	11	0.05
Tetrachloroethene (ug/l)	W-2-N (bg)	0	4	27	No	11	0.05
Tetrachloroethene (ug/l)	W-3-N (bg)	-0.3336	-33	-27	Yes	11	0.05
Tetrachloroethene (ug/l)	W-4-N (bg)	-0.0364	-14	-27	No	11	0.05
Toluene (ug/l)	HR-04 (bg)	0	0	27	No	11	0.05
Toluene (ug/l)	W-2-N (bg)	0	-2	-27	No	11	0.05
Toluene (ug/l)	W-3-N (bg)	-0.1871	-36	-27	Yes	11	0.05
Toluene (ug/l)	W-4-N (bg)	0	0	27	No	11	0.05
trans-1,2-Dichloroethene (ug/l)	HR-04 (bg)	0.02526	28	27	Yes	11	0.05
trans-1,2-Dichloroethene (ug/l)	W-2-N (bg)	0.02769	21	27	No	11	0.05
trans-1,2-Dichloroethene (ug/l)	W-3-N (bg)	-0.1137	-38	-27	Yes	11	0.05
trans-1,2-Dichloroethene (ug/l)	W-4-N (bg)	0.02985	24	27	No	11	0.05
Trichloroethene (ug/l)	HR-04 (bg)	-0.05369	-42	-27	Yes	11	0.05
Trichloroethene (ug/l)	W-2-N (bg)	-0.09858	-29	-27	Yes	11	0.05
Trichloroethene (ug/l)	W-3-N (bg)	-0.1298	-31	-27	Yes	11	0.05
Trichloroethene (ug/l)	W-4-N (bg)	0.4294	23	27	No	11	0.05
Vinyl chloride (ug/l)	HR-04 (bg)	0	0	27	No	11	0.05
Vinyl chloride (ug/l)	W-2-N (bg)	0	0	27	No	11	0.05
Vinyl chloride (ug/l)	W-3-N (bg)	-0.512	-33	-27	Yes	11	0.05
Vinyl chloride (ug/l)	W-4-N (bg)	-0.00...	-6	-27	No	11	0.05
Xylene (total)	HR-04 (bg)	0.05051	28	27	Yes	11	0.05
Xylene (total)	W-2-N (bg)	0.05051	28	27	Yes	11	0.05
Xylene (total)	W-3-N (bg)	0	-5	-27	No	11	0.05
Xylene (total)	W-4-N (bg)	0.05053	28	27	Yes	11	0.05

South Settling Lagoon Statistical Analysis

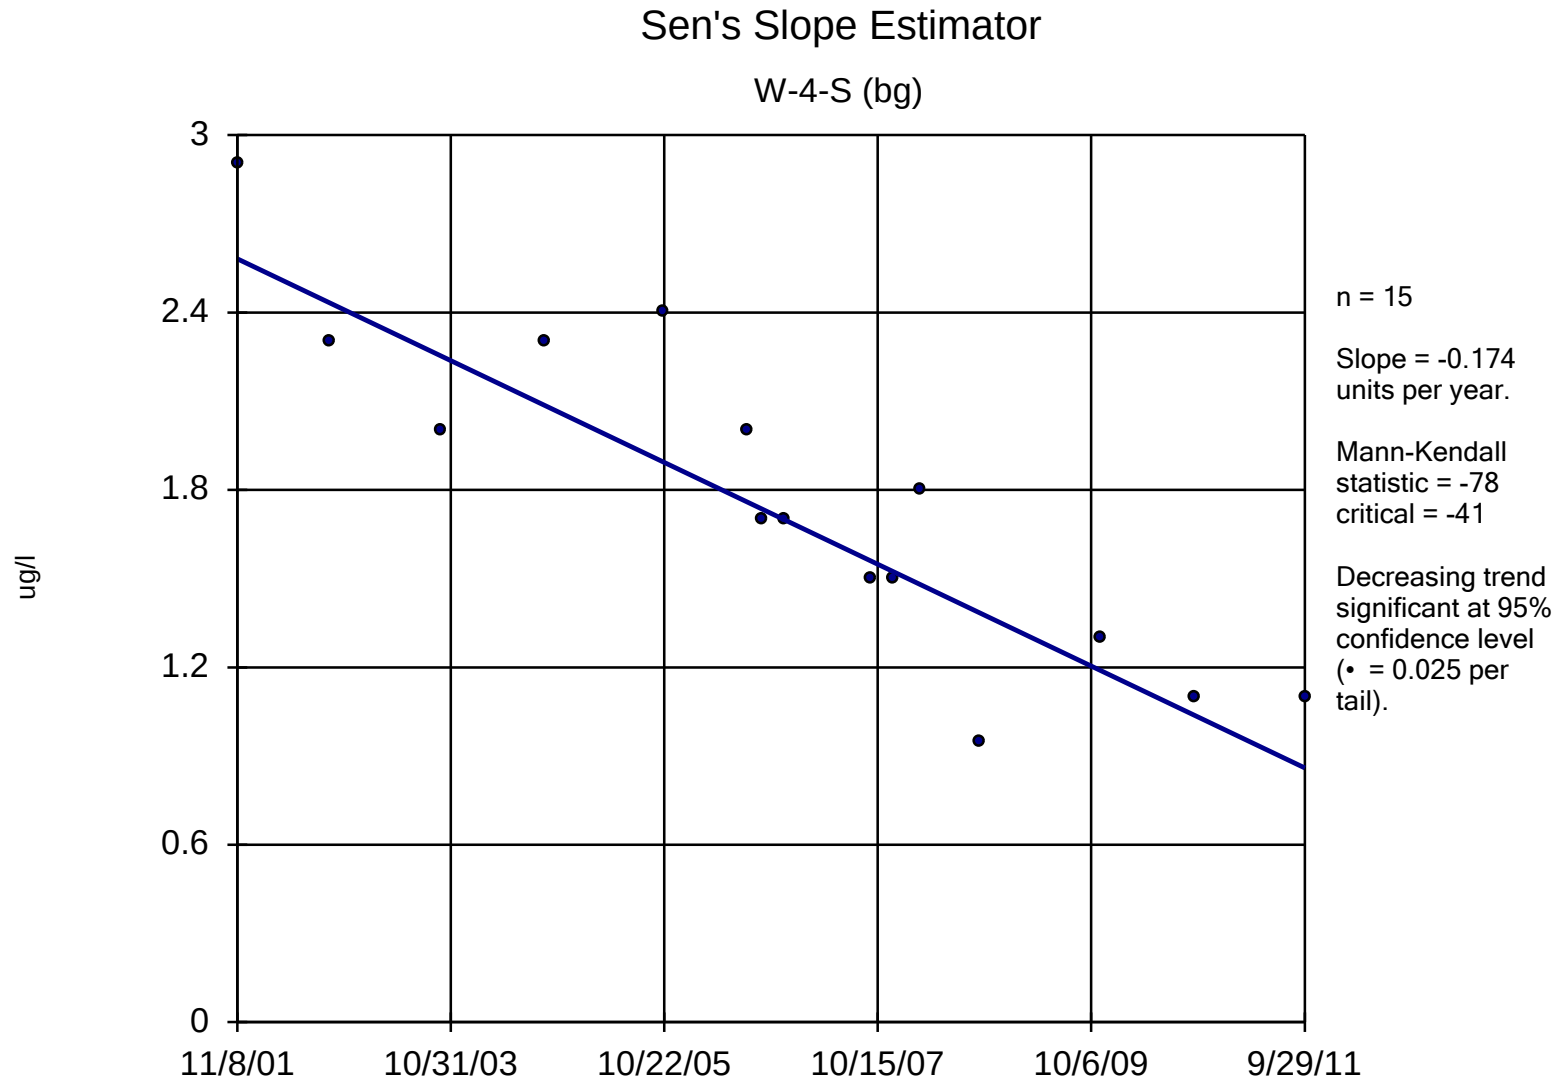


Constituent: 1,1,1-Trichloroethane Analysis Run 1/23/2012 10:29 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1

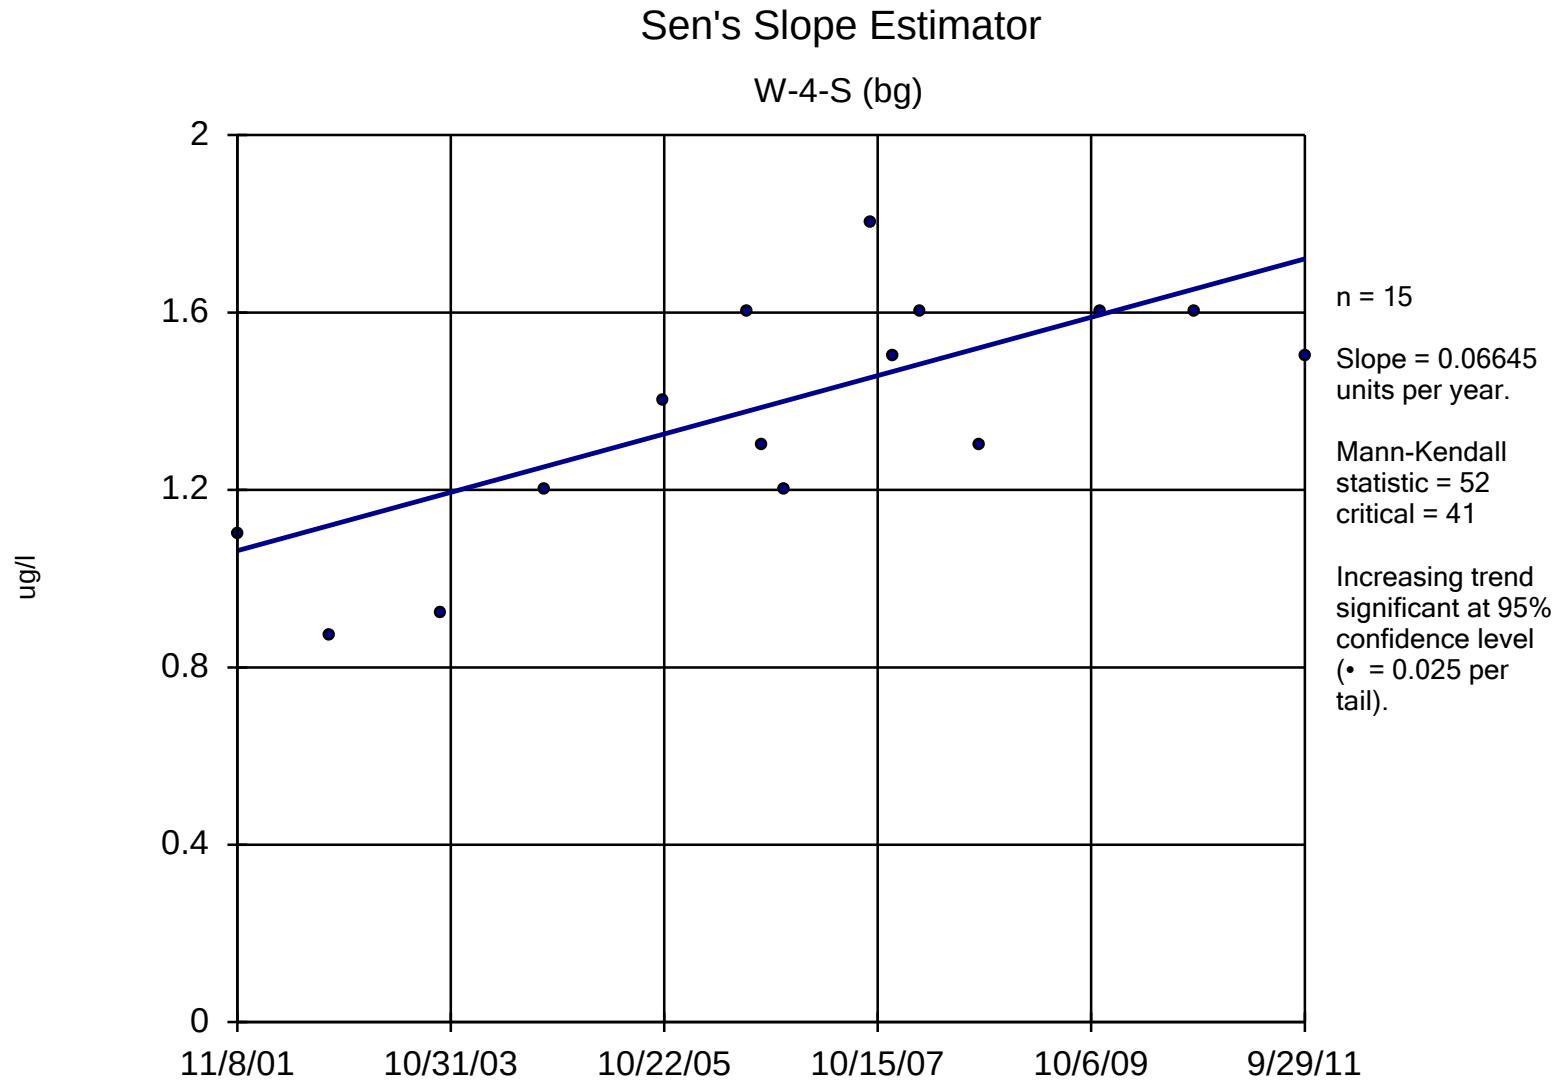

Constituent: 1,1-Dichloroethane Analysis Run 1/23/2012 10:29 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1


Sen's Slope Estimator

W-3-S (bg)

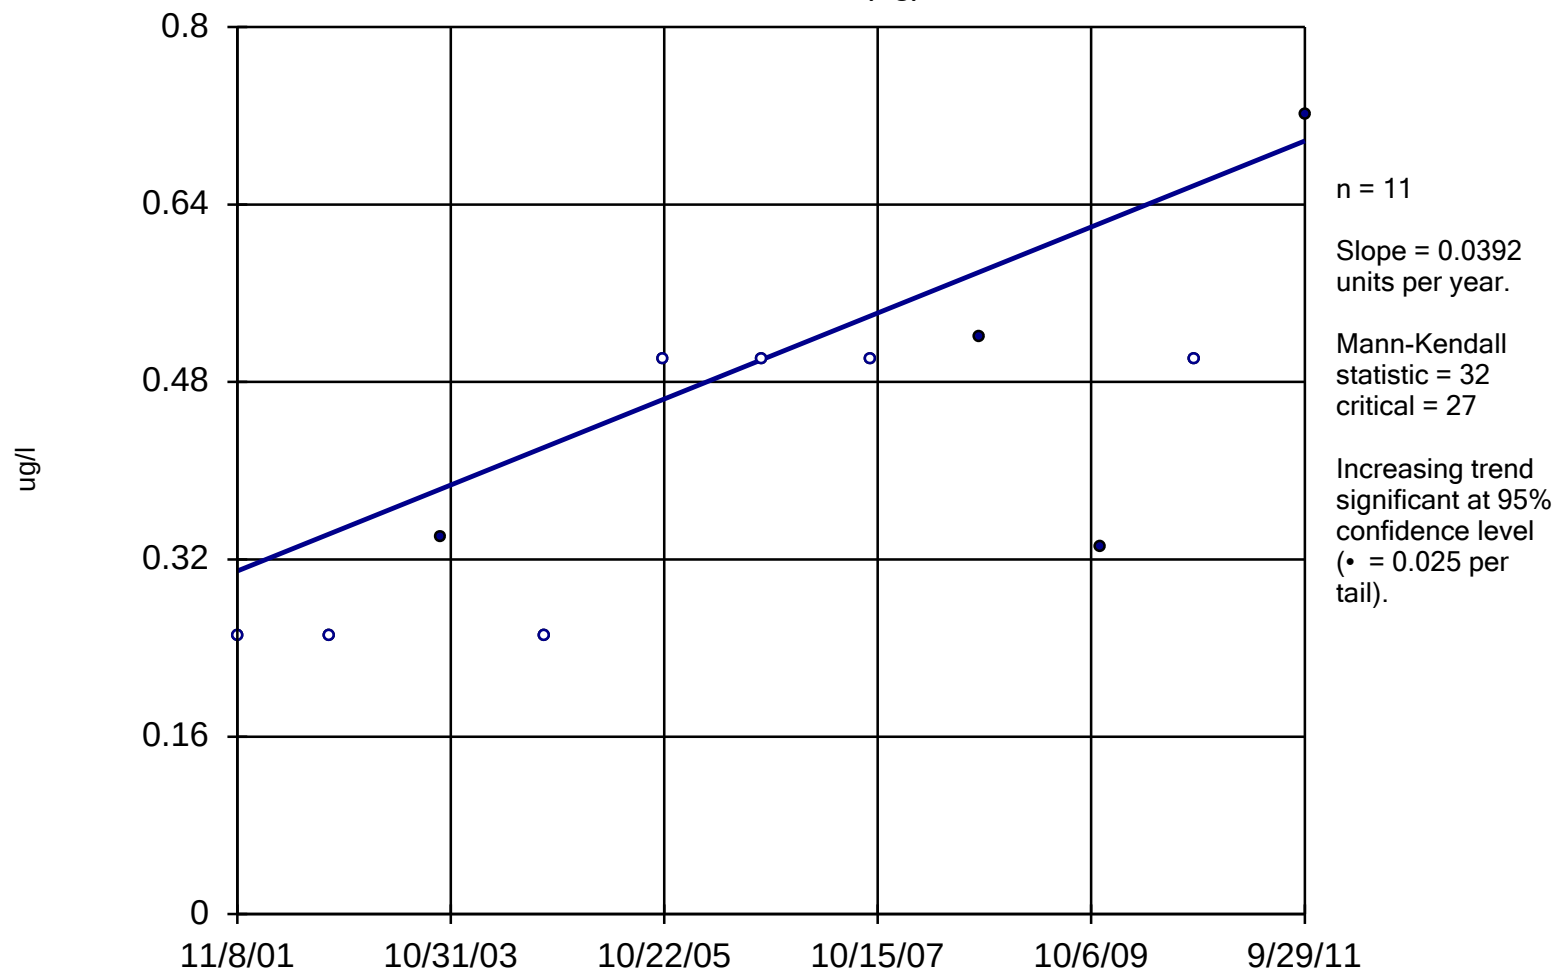


Constituent: cis-1,2-Dichloroethene Analysis Run 1/23/2012 10:29 AM


Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1

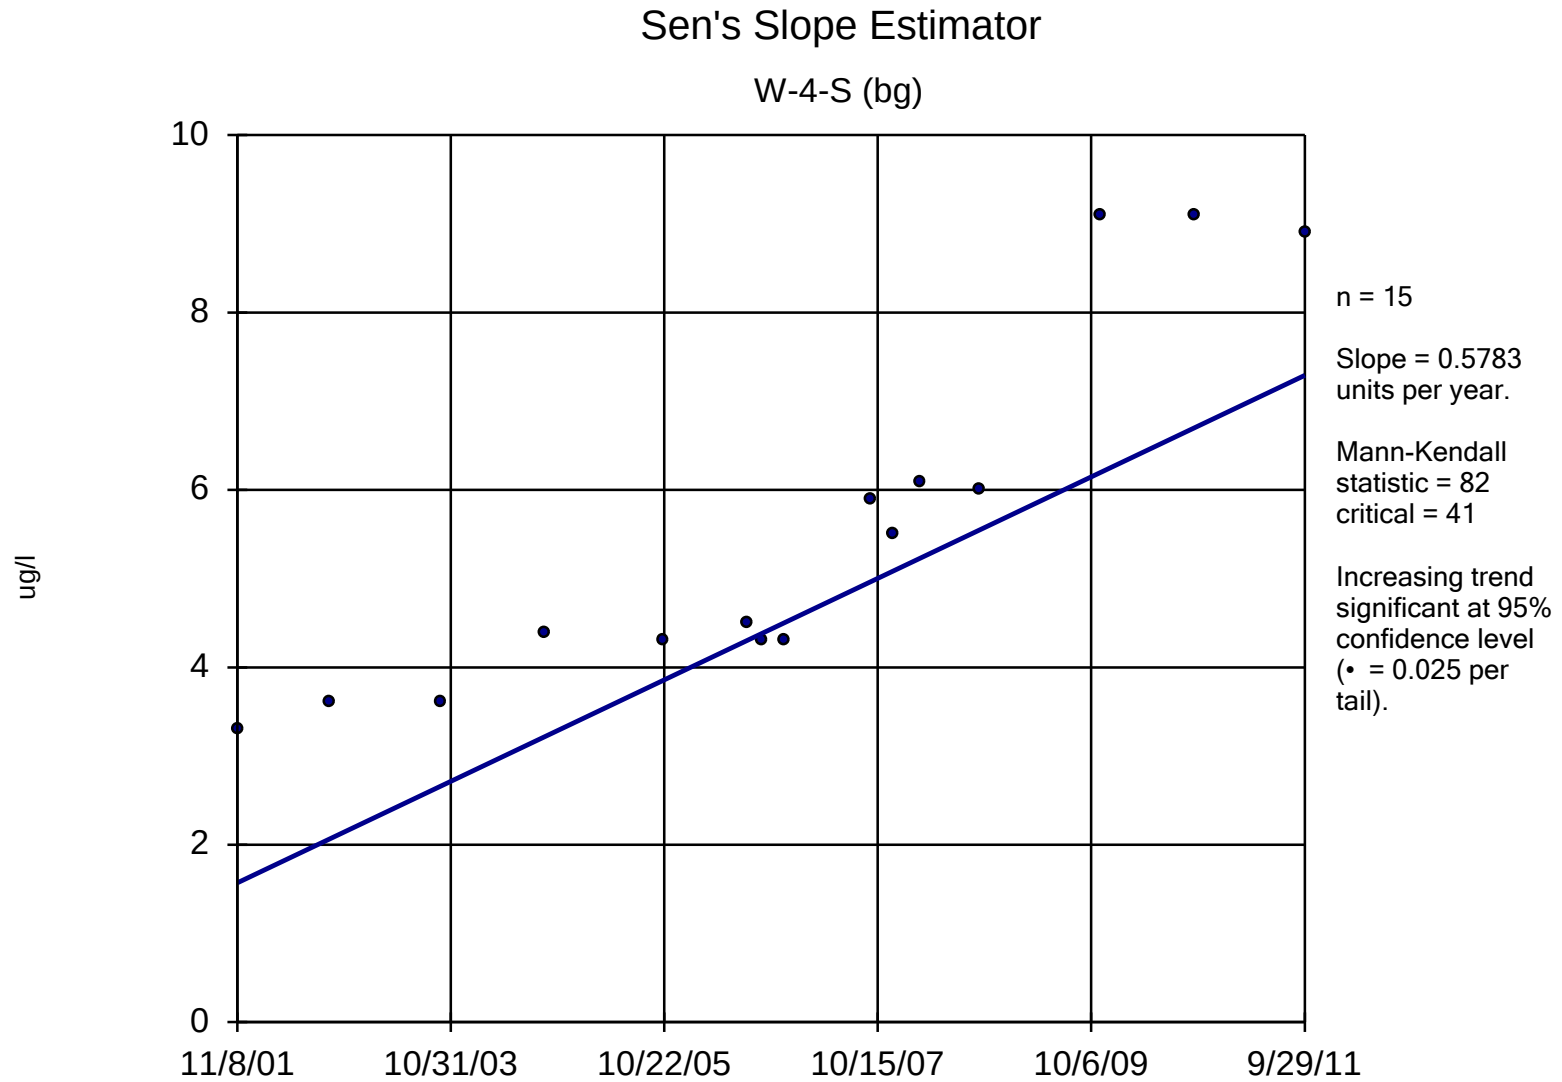


Constituent: cis-1,2-Dichloroethene Analysis Run 1/23/2012 10:29 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1

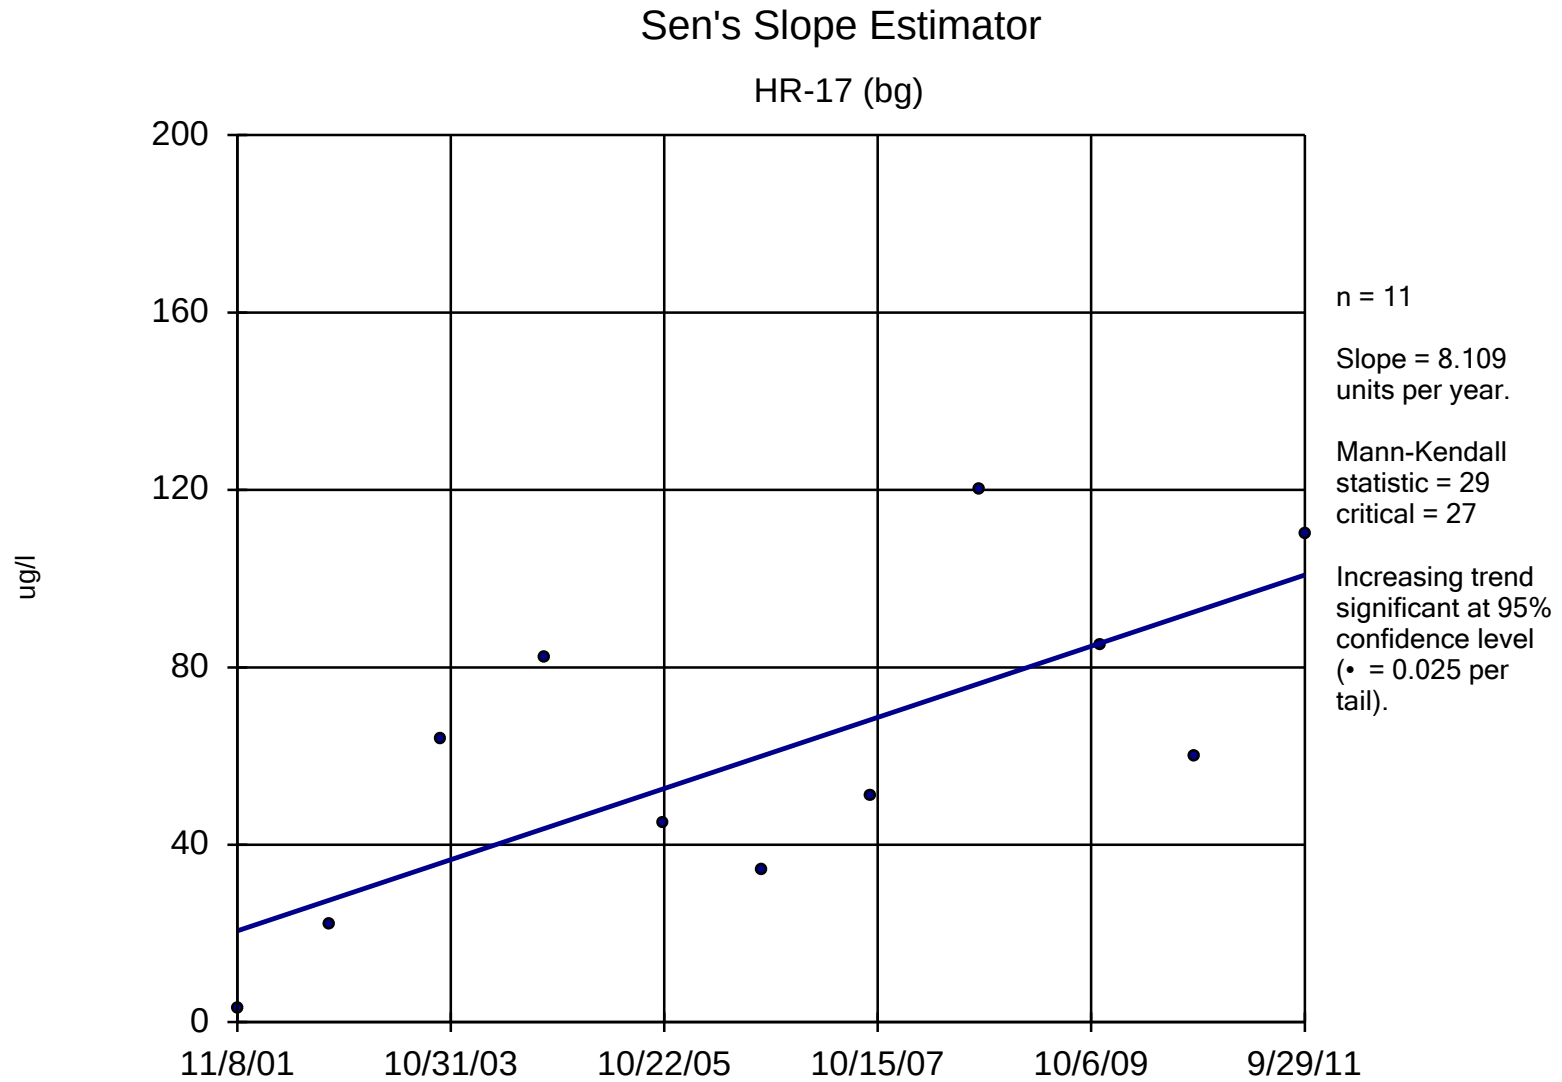


Constituent: Tetrachloroethene Analysis Run 1/23/2012 10:29 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1

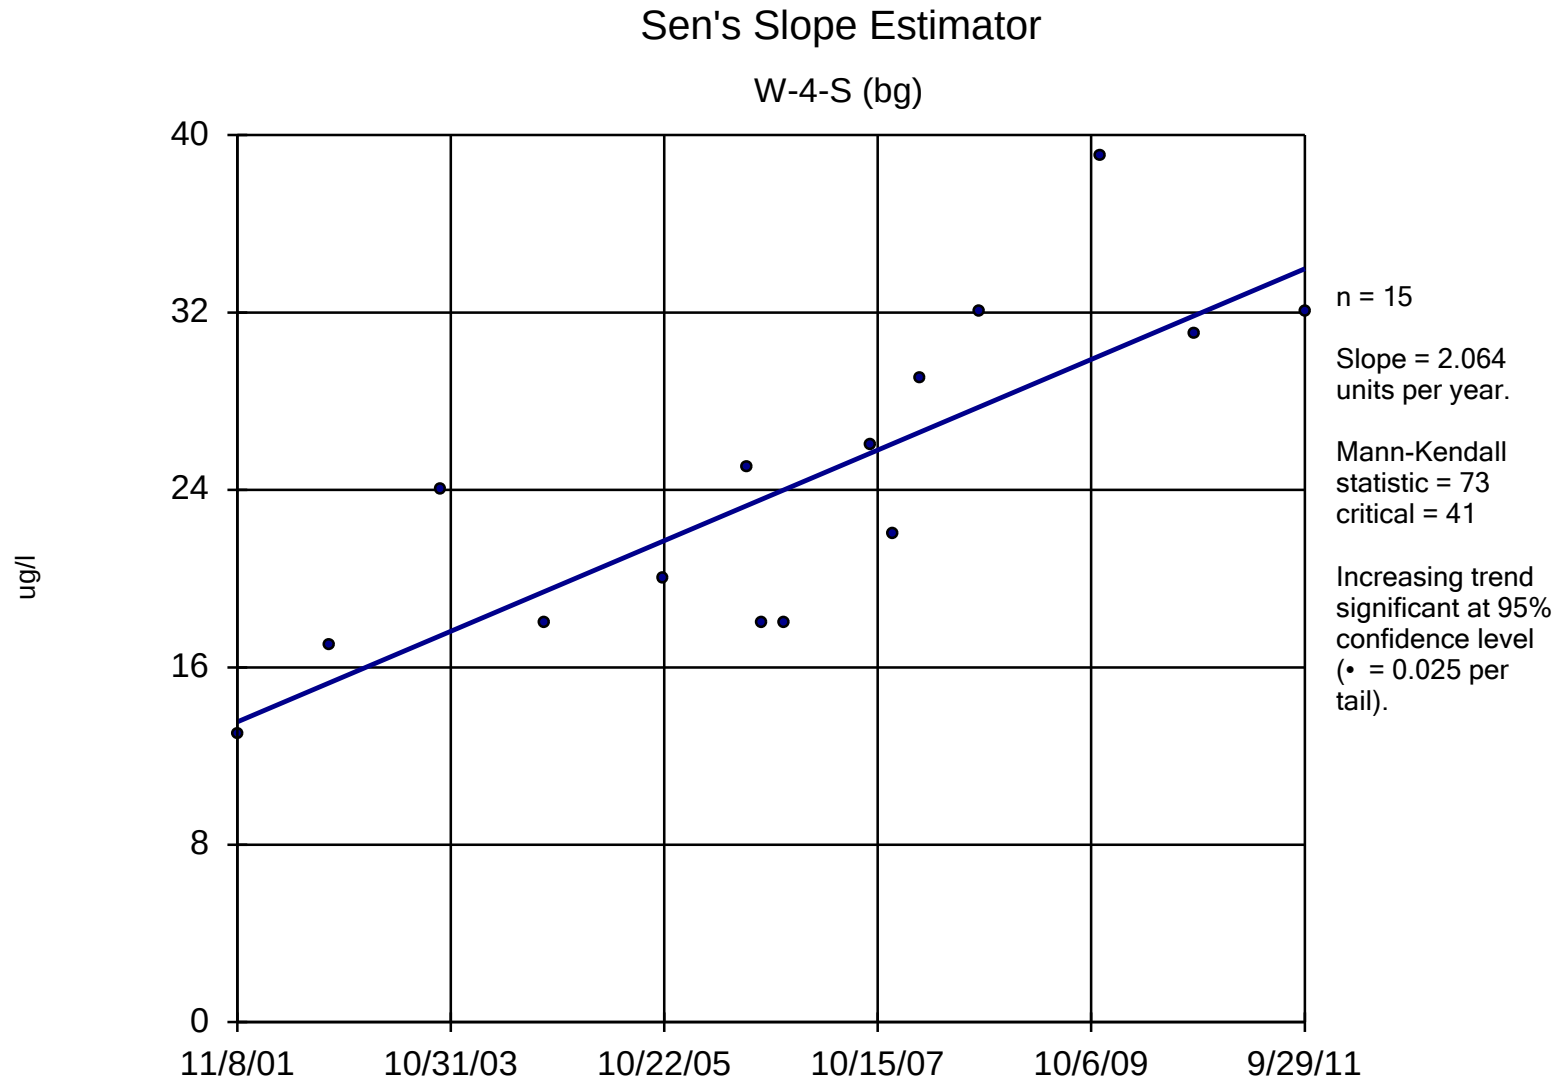

Constituent: Tetrachloroethene Analysis Run 1/23/2012 10:29 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1

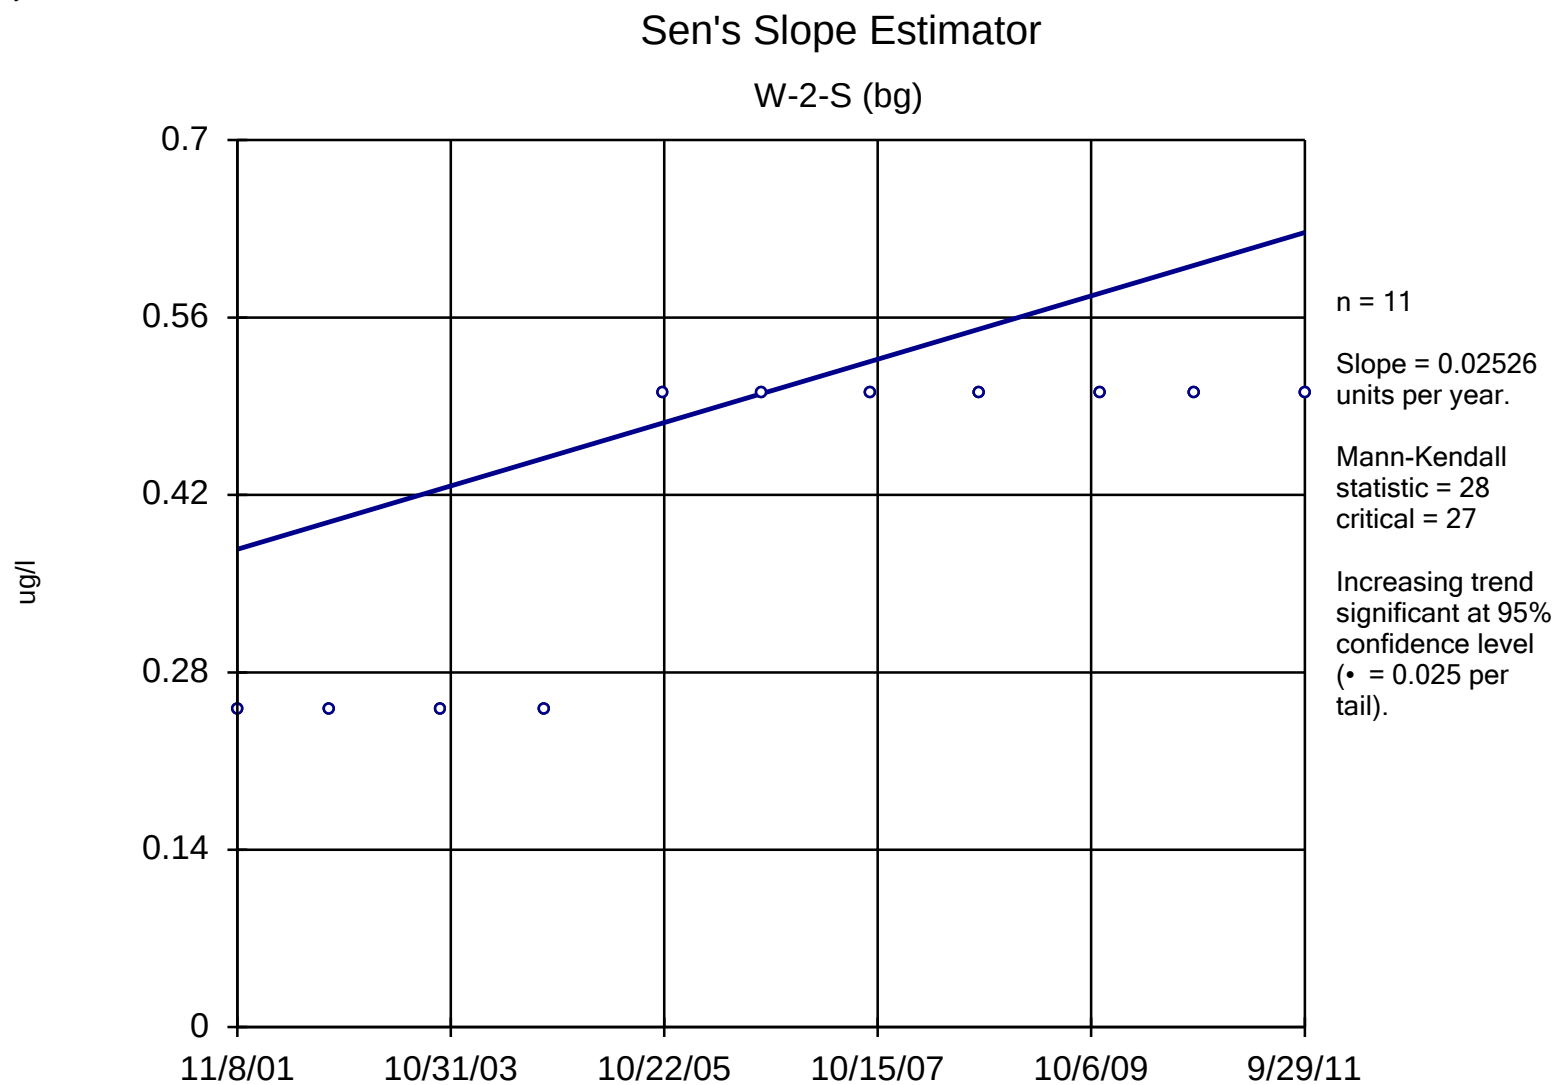

Constituent: trans-1,2-Dichloroethene Analysis Run 1/23/2012 10:29 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1

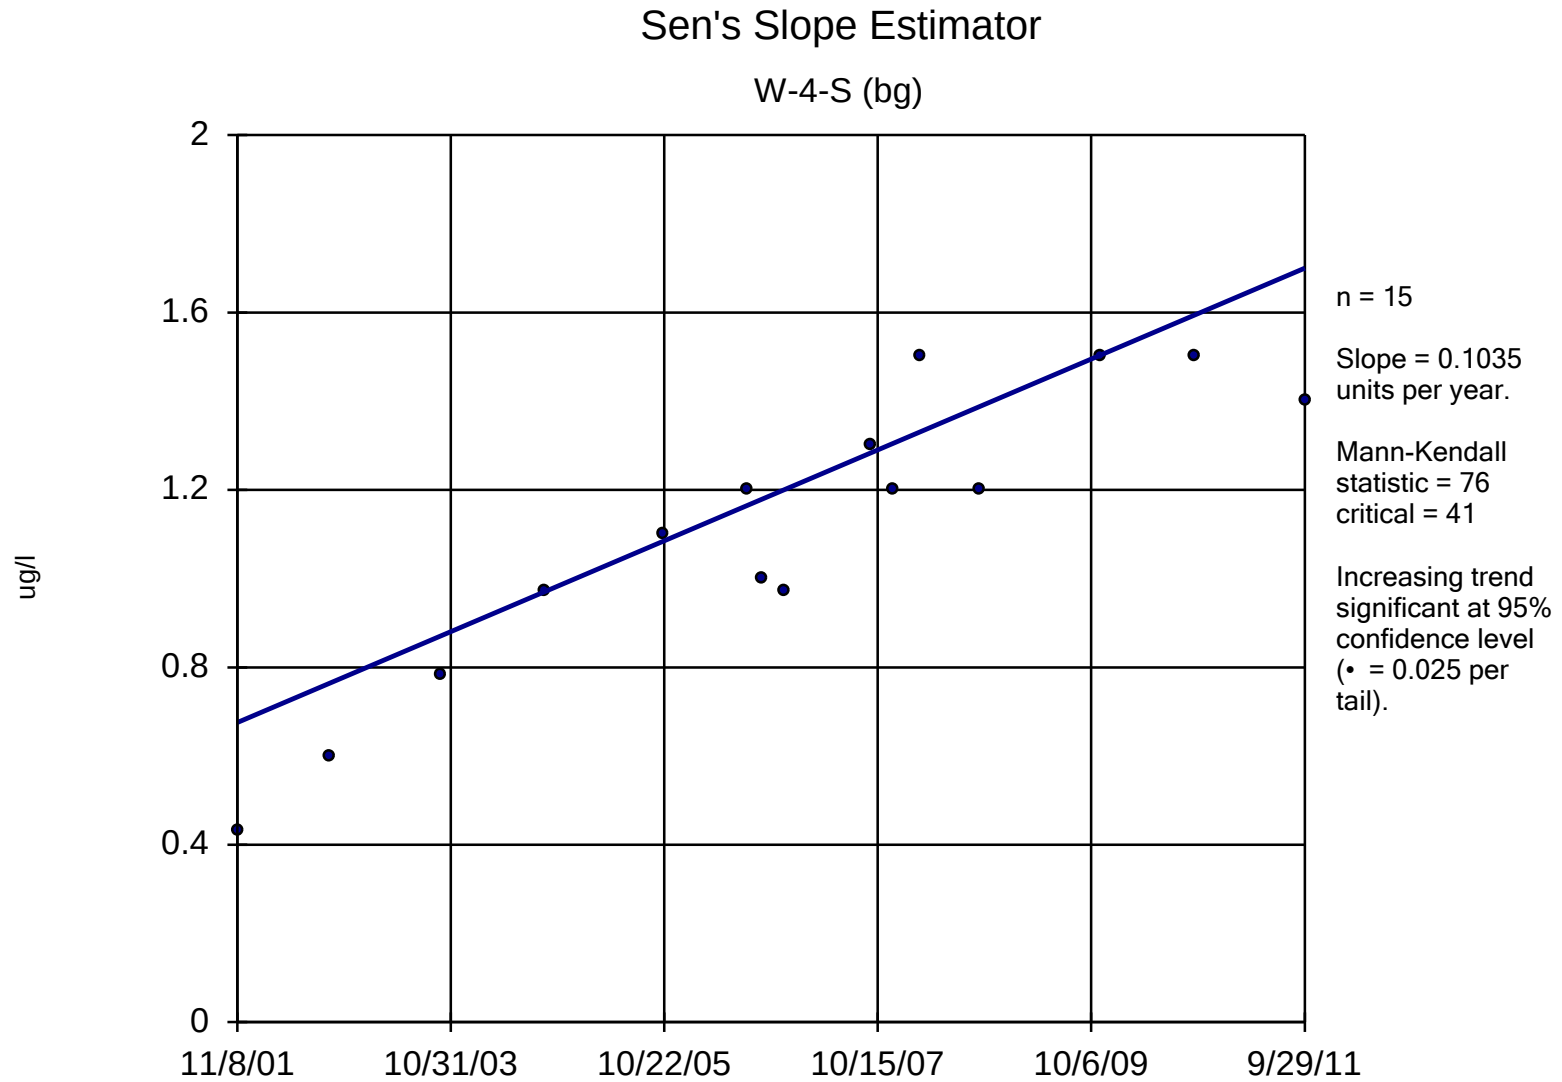


Constituent: trans-1,2-Dichloroethene Analysis Run 1/23/2012 10:29 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1


Sen's Slope Estimator

HR-17 (bg)

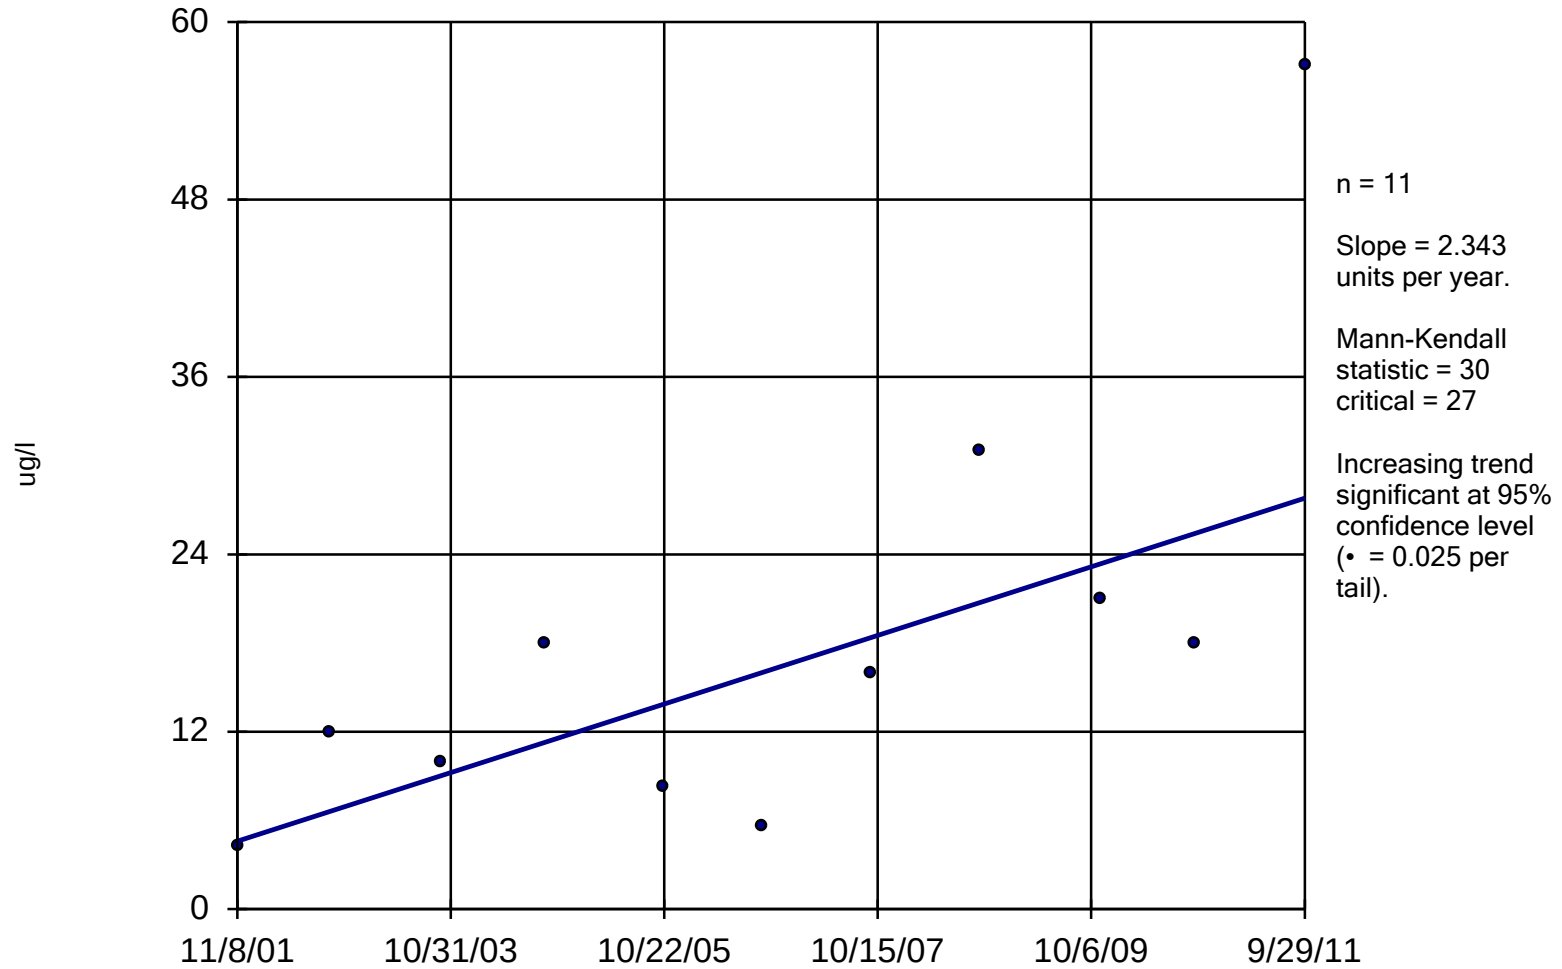


Constituent: Trichloroethene Analysis Run 1/23/2012 10:29 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1

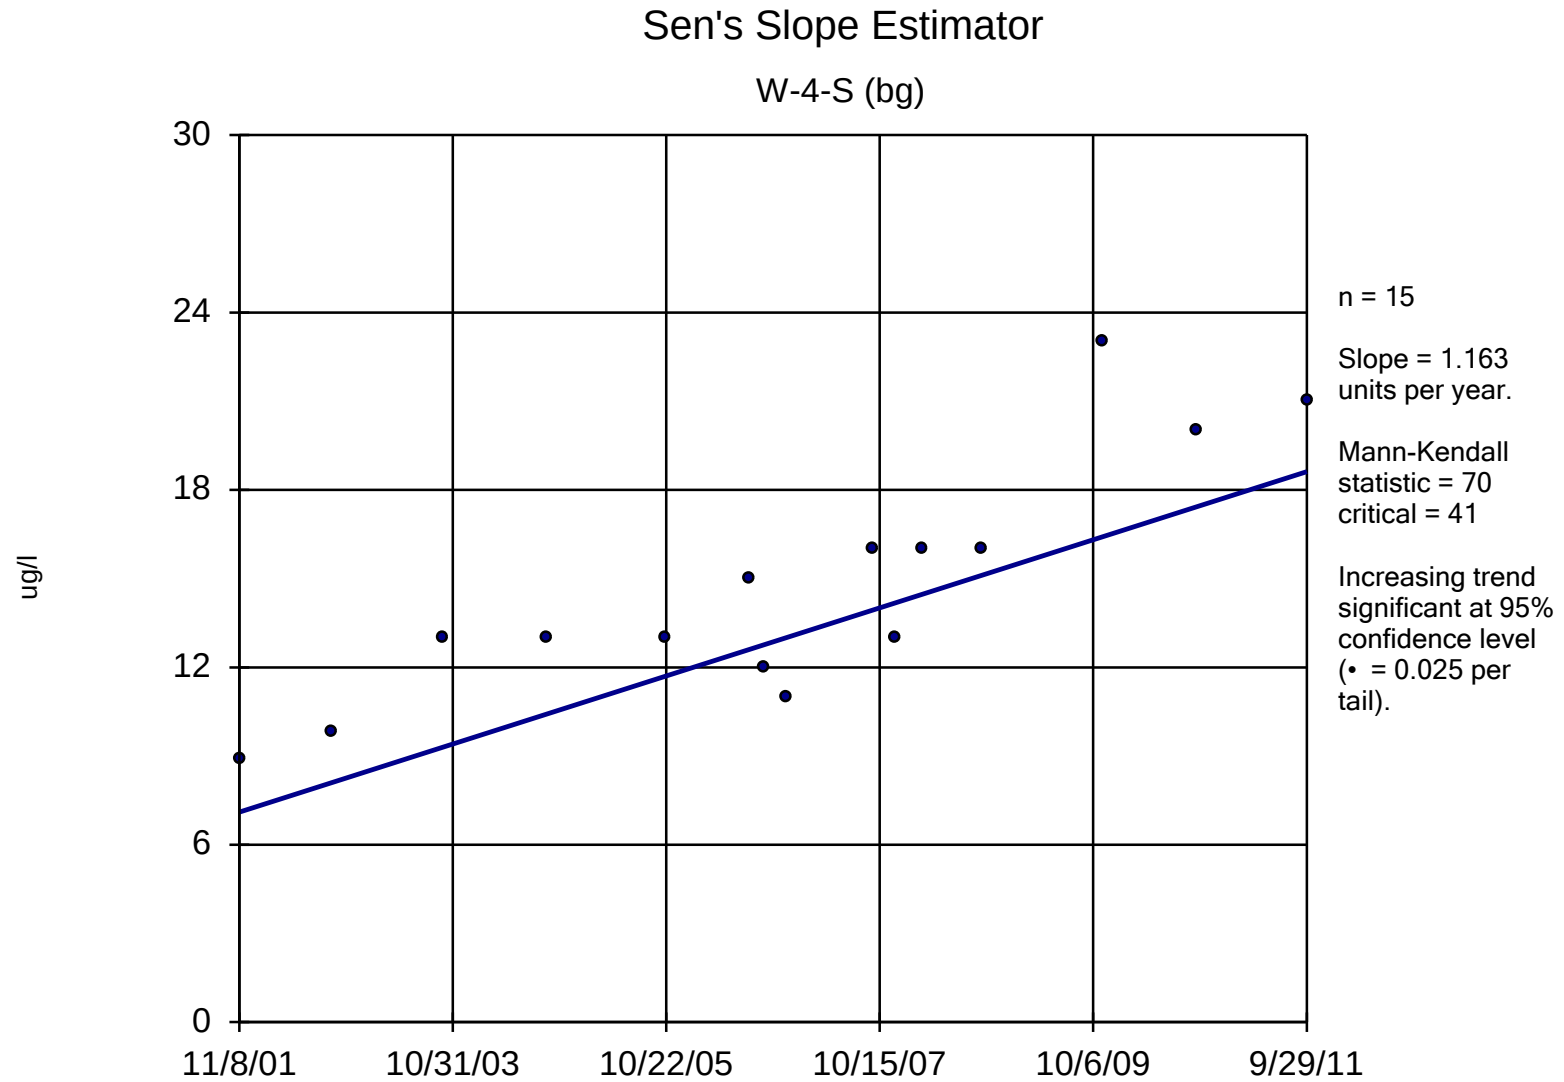

Constituent: Trichloroethene Analysis Run 1/23/2012 10:29 AM
Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1


Sen's Slope Estimator

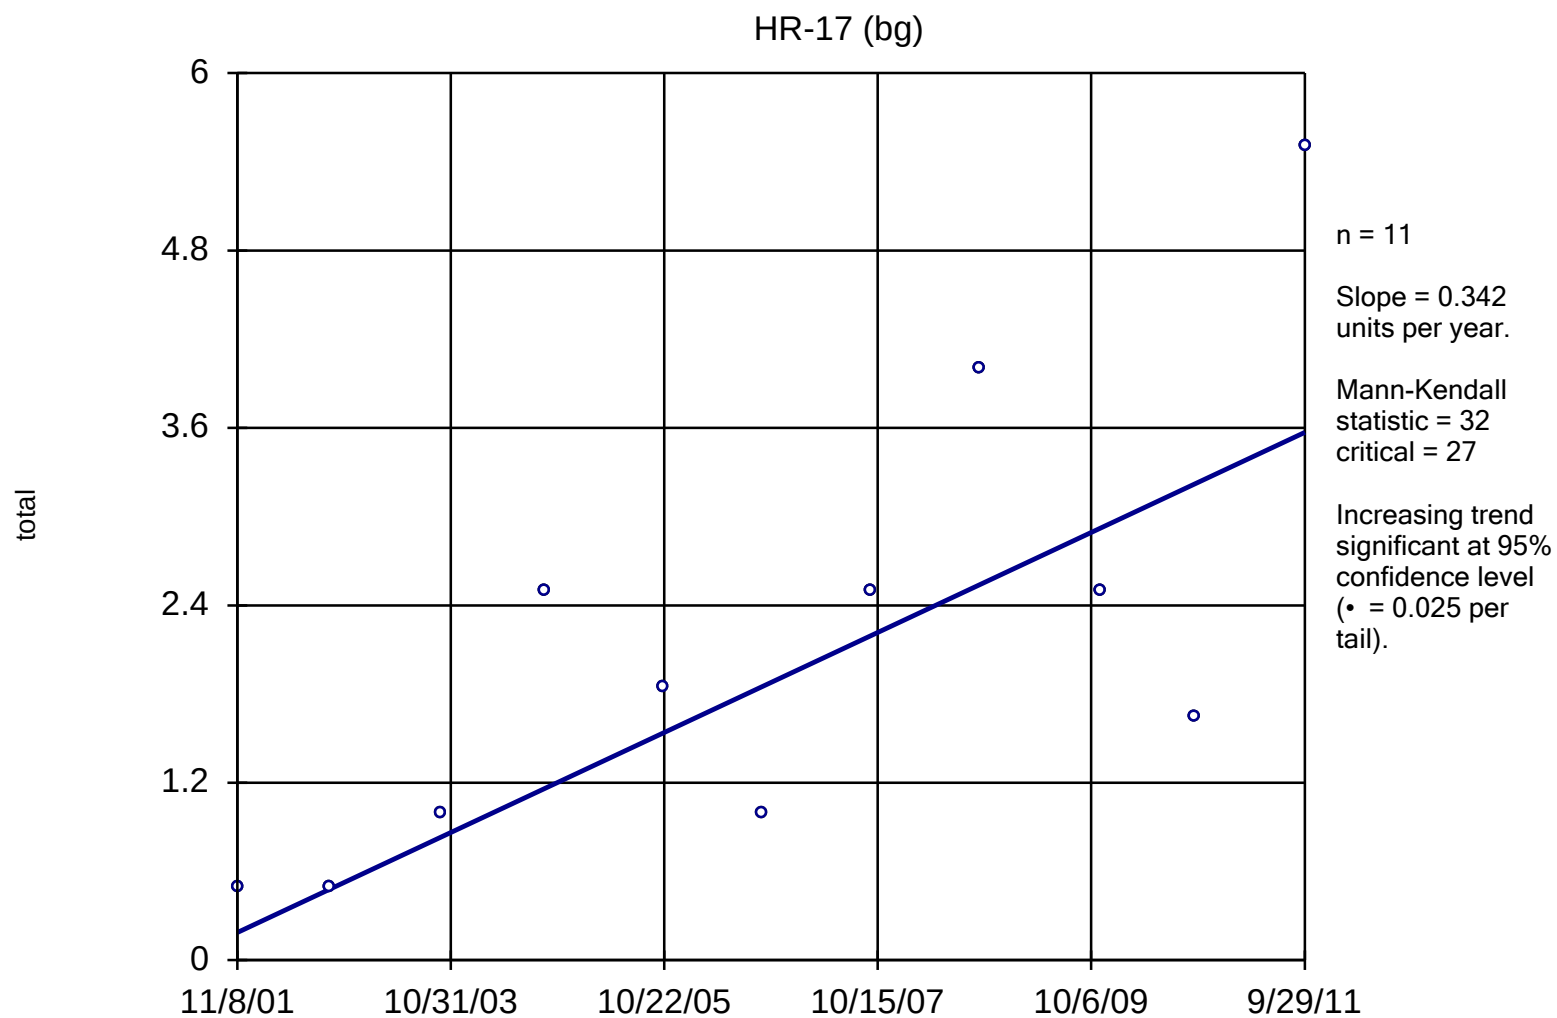

Constituent: Xylene Analysis Run 1/23/2012 10:30 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1


Sen's Slope Estimator

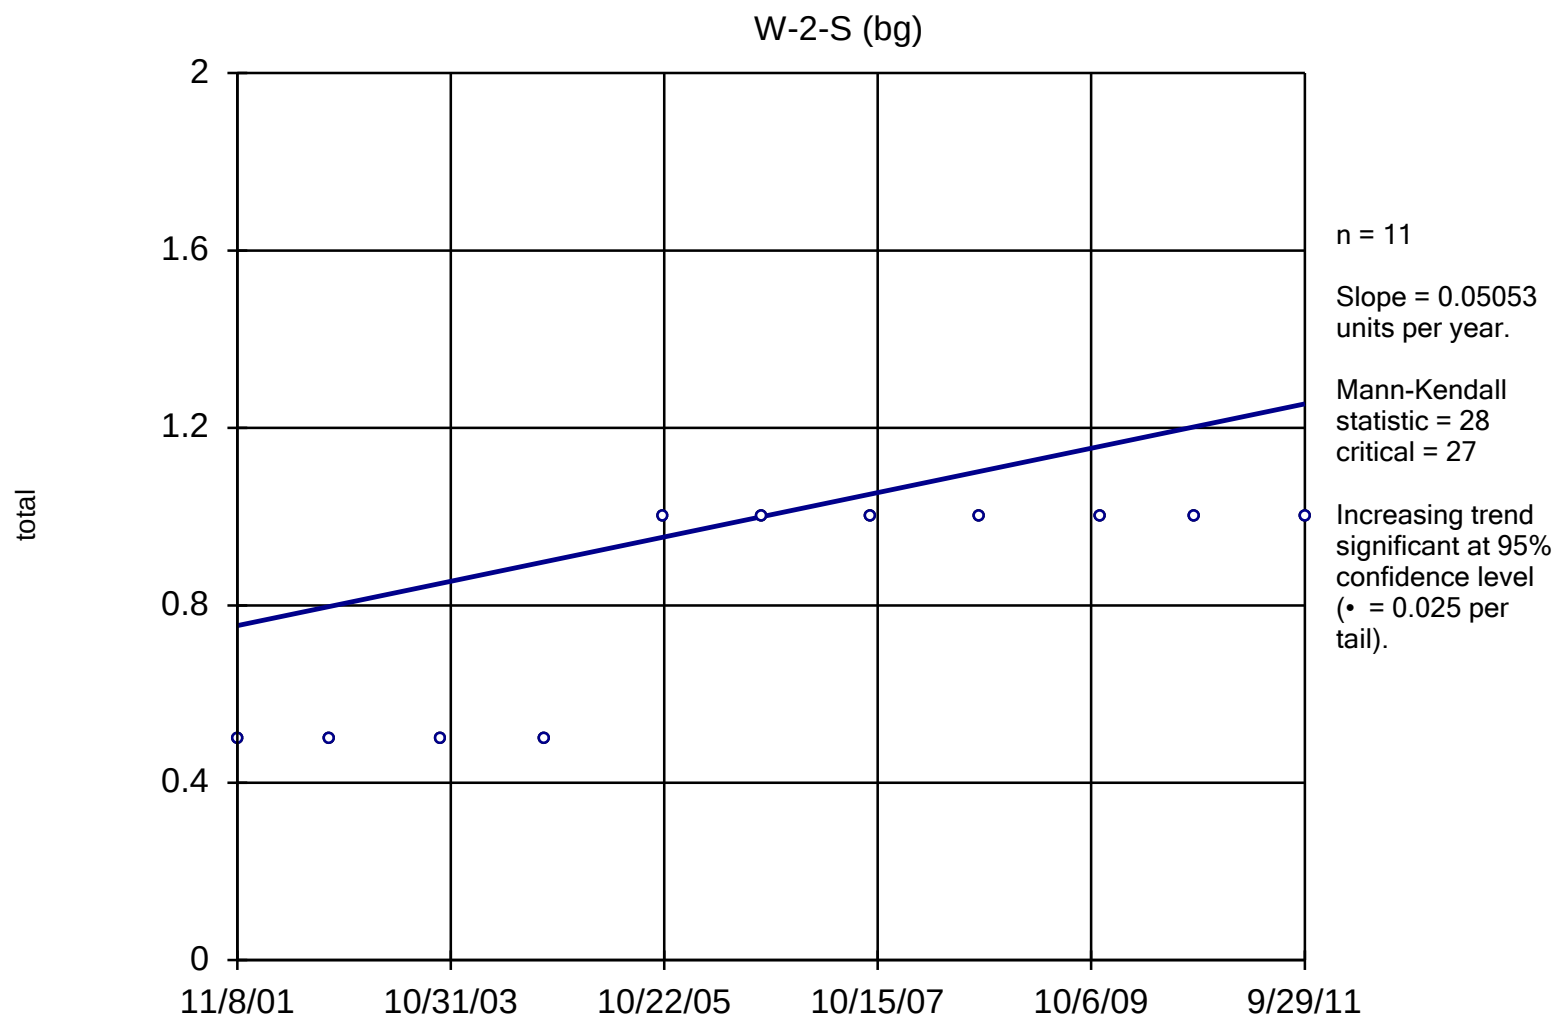

Constituent: Xylene Analysis Run 1/23/2012 10:30 AM


Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1

Sen's Slope Estimator

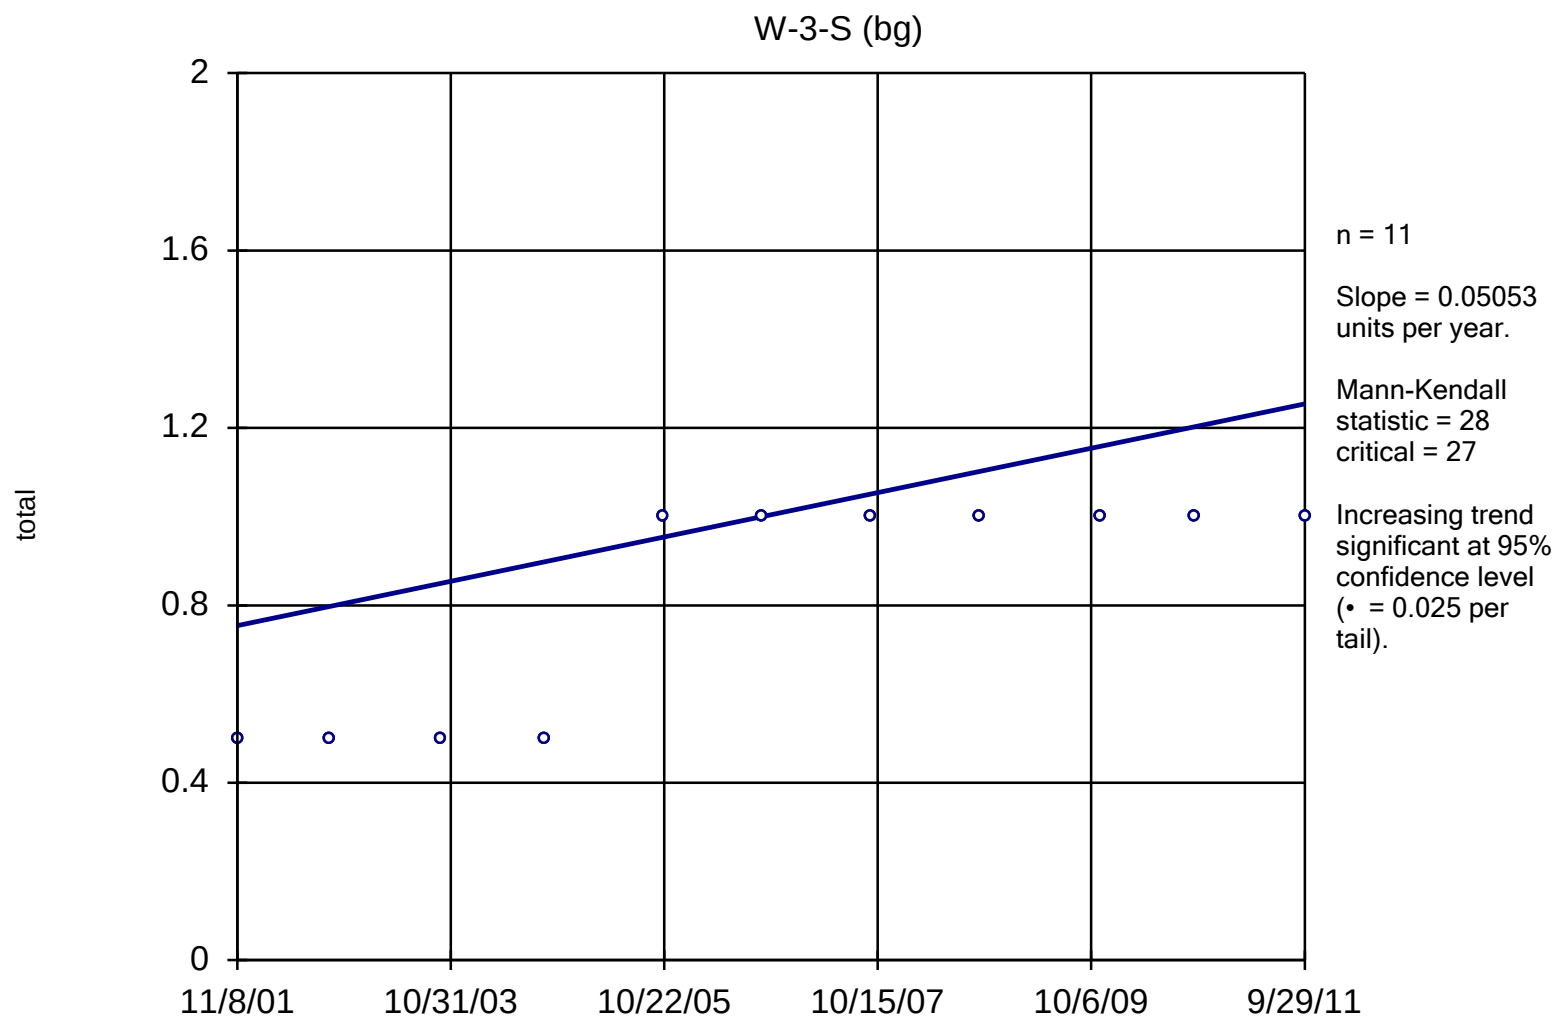

Constituent: Xylene Analysis Run 1/23/2012 10:30 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1

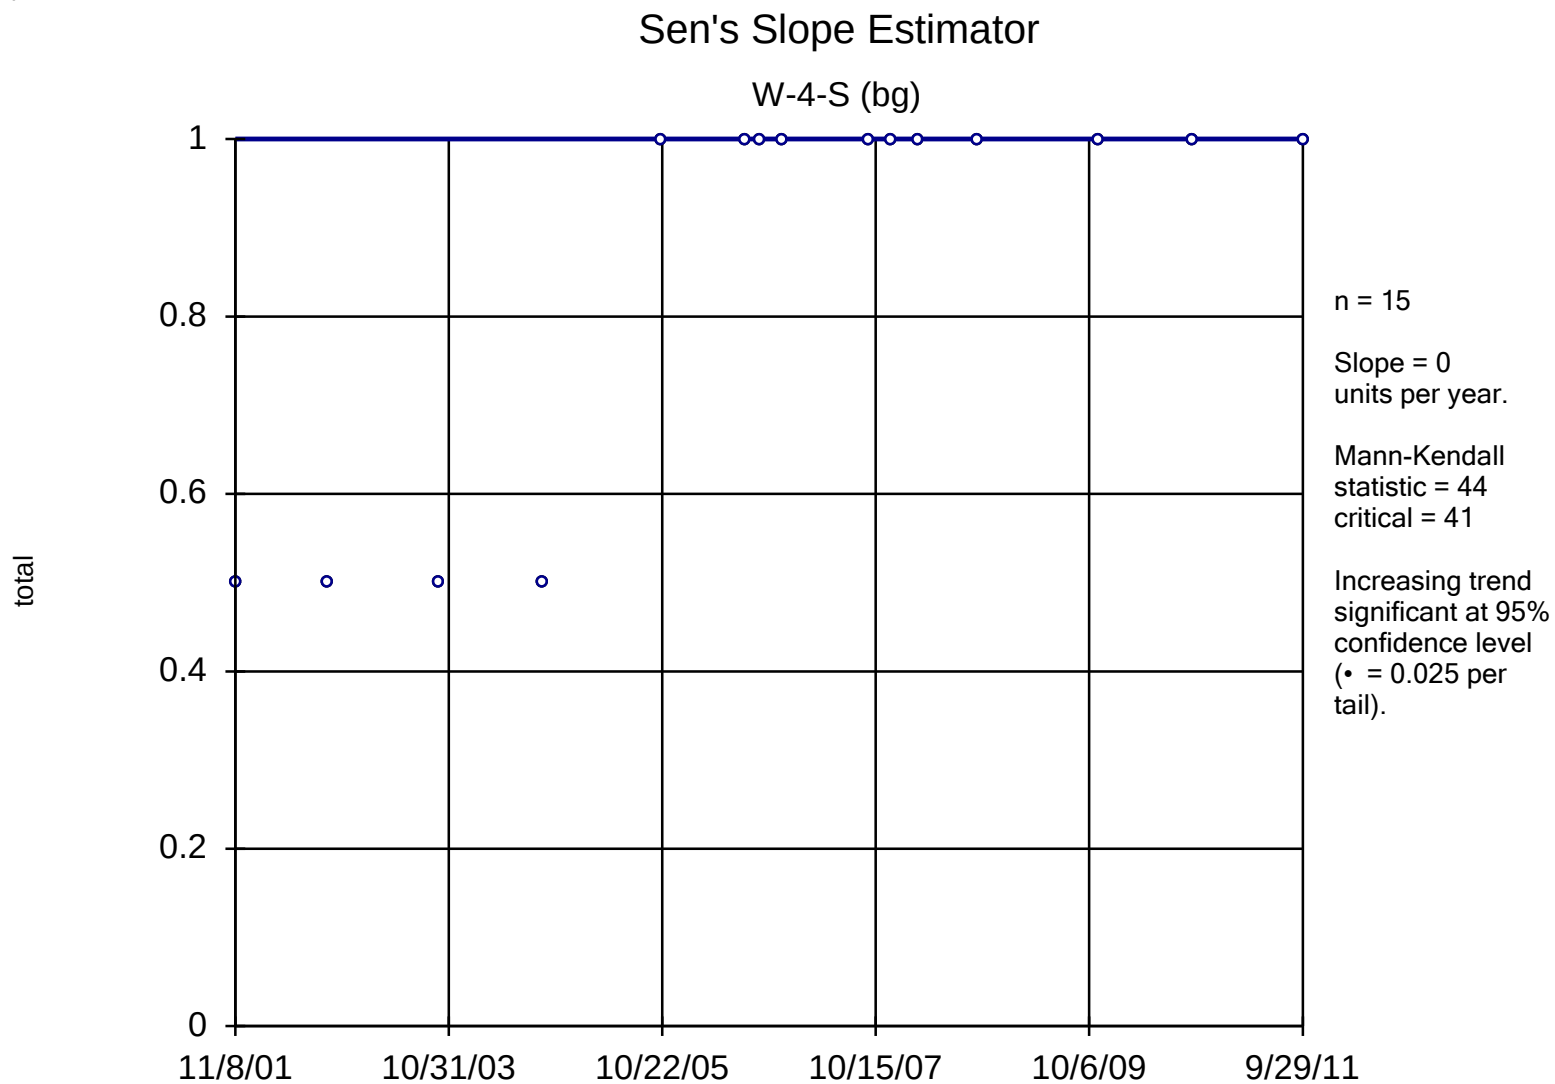

Constituent: Xylene Analysis Run 1/23/2012 10:30 AM

Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1

Sen's Slope/Mann-Kendall

Facility: Client: ARCADIS G&M, Inc. Data File: Input South.REV 1 Printed 1/23/2012, 10:38 AM

<u>Constituent</u>	<u>Well</u>	<u>Slope</u>	<u>Mann-K.</u>	<u>Critical</u>	<u>Sig.</u>	<u>N</u>	<u>Alpha</u>
1,1,1-Trichloroethane (ug/l)	HR-17 (bg)	0.06246	10	27	No	11	0.05
1,1,1-Trichloroethane (ug/l)	W-2-S (bg)	0	-4	-27	No	11	0.05
1,1,1-Trichloroethane (ug/l)	W-3-S (bg)	-0.1493	-27	-27	No	11	0.05
1,1,1-Trichloroethane (ug/l)	W-4-S (bg)	-0.174	-78	-41	Yes	15	0.05
1,1-Dichloroethane (ug/l)	HR-17 (bg)	0.1497	25	27	No	11	0.05
1,1-Dichloroethane (ug/l)	W-2-S (bg)	0.02391	14	27	No	11	0.05
1,1-Dichloroethane (ug/l)	W-3-S (bg)	0	-8	-27	No	11	0.05
1,1-Dichloroethane (ug/l)	W-4-S (bg)	0.06645	52	41	Yes	15	0.05
1,1-Dichloroethene (ug/l)	HR-17 (bg)	0.1013	21	27	No	11	0.05
1,1-Dichloroethene (ug/l)	W-2-S (bg)	0	0	27	No	11	0.05
1,1-Dichloroethene (ug/l)	W-3-S (bg)	0	10	27	No	11	0.05
1,1-Dichloroethene (ug/l)	W-4-S (bg)	0	-8	-41	No	15	0.05
Benzene (ug/l)	HR-17 (bg)	0.1013	21	27	No	11	0.05
Benzene (ug/l)	W-2-S (bg)	0	-6	-27	No	11	0.05
Benzene (ug/l)	W-3-S (bg)	0	10	27	No	11	0.05
Benzene (ug/l)	W-4-S (bg)	0	0	41	No	15	0.05
cis-1,2-Dichloroethene (ug/l)	HR-17 (bg)	-0.04888	-5	-27	No	11	0.05
cis-1,2-Dichloroethene (ug/l)	W-2-S (bg)	0	1	27	No	11	0.05
cis-1,2-Dichloroethene (ug/l)	W-3-S (bg)	0.0392	32	27	Yes	11	0.05
cis-1,2-Dichloroethene (ug/l)	W-4-S (bg)	0.5783	82	41	Yes	15	0.05
Ethylbenzene (ug/l)	HR-17 (bg)	0.1013	21	27	No	11	0.05
Ethylbenzene (ug/l)	W-2-S (bg)	0	0	27	No	11	0.05
Ethylbenzene (ug/l)	W-3-S (bg)	0	0	27	No	11	0.05
Ethylbenzene (ug/l)	W-4-S (bg)	0	14	41	No	15	0.05
Tetrachloroethene (ug/l)	HR-17 (bg)	8.109	29	27	Yes	11	0.05
Tetrachloroethene (ug/l)	W-2-S (bg)	-0.00664	-22	-27	No	11	0.05
Tetrachloroethene (ug/l)	W-3-S (bg)	0.08714	27	27	No	11	0.05
Tetrachloroethene (ug/l)	W-4-S (bg)	2.064	73	41	Yes	15	0.05
Toluene (ug/l)	HR-17 (bg)	0.1013	21	27	No	11	0.05
Toluene (ug/l)	W-2-S (bg)	0	6	27	No	11	0.05
Toluene (ug/l)	W-3-S (bg)	0	0	27	No	11	0.05
Toluene (ug/l)	W-4-S (bg)	0	23	41	No	15	0.05
trans-1,2-Dichloroethene (ug/l)	HR-17 (bg)	0.107	19	27	No	11	0.05
trans-1,2-Dichloroethene (ug/l)	W-2-S (bg)	0.02526	28	27	Yes	11	0.05
trans-1,2-Dichloroethene (ug/l)	W-3-S (bg)	0	14	27	No	11	0.05
trans-1,2-Dichloroethene (ug/l)	W-4-S (bg)	0.1035	76	41	Yes	15	0.05
Trichloroethene (ug/l)	HR-17 (bg)	2.343	30	27	Yes	11	0.05
Trichloroethene (ug/l)	W-2-S (bg)	0.1247	22	27	No	11	0.05
Trichloroethene (ug/l)	W-3-S (bg)	0.07487	13	27	No	11	0.05
Trichloroethene (ug/l)	W-4-S (bg)	1.163	70	41	Yes	15	0.05
Vinyl chloride (ug/l)	HR-17 (bg)	0.1013	21	27	No	11	0.05
Vinyl chloride (ug/l)	W-2-S (bg)	0	0	27	No	11	0.05
Vinyl chloride (ug/l)	W-3-S (bg)	0	0	27	No	11	0.05
Vinyl chloride (ug/l)	W-4-S (bg)	0	0	41	No	15	0.05
Xylene (total)	HR-17 (bg)	0.342	32	27	Yes	11	0.05
Xylene (total)	W-2-S (bg)	0.05053	28	27	Yes	11	0.05
Xylene (total)	W-3-S (bg)	0.05053	28	27	Yes	11	0.05
Xylene (total)	W-4-S (bg)	0	44	41	Yes	15	0.05